




LATERAL & GRAVITY DESIGN
KLRY PLANS

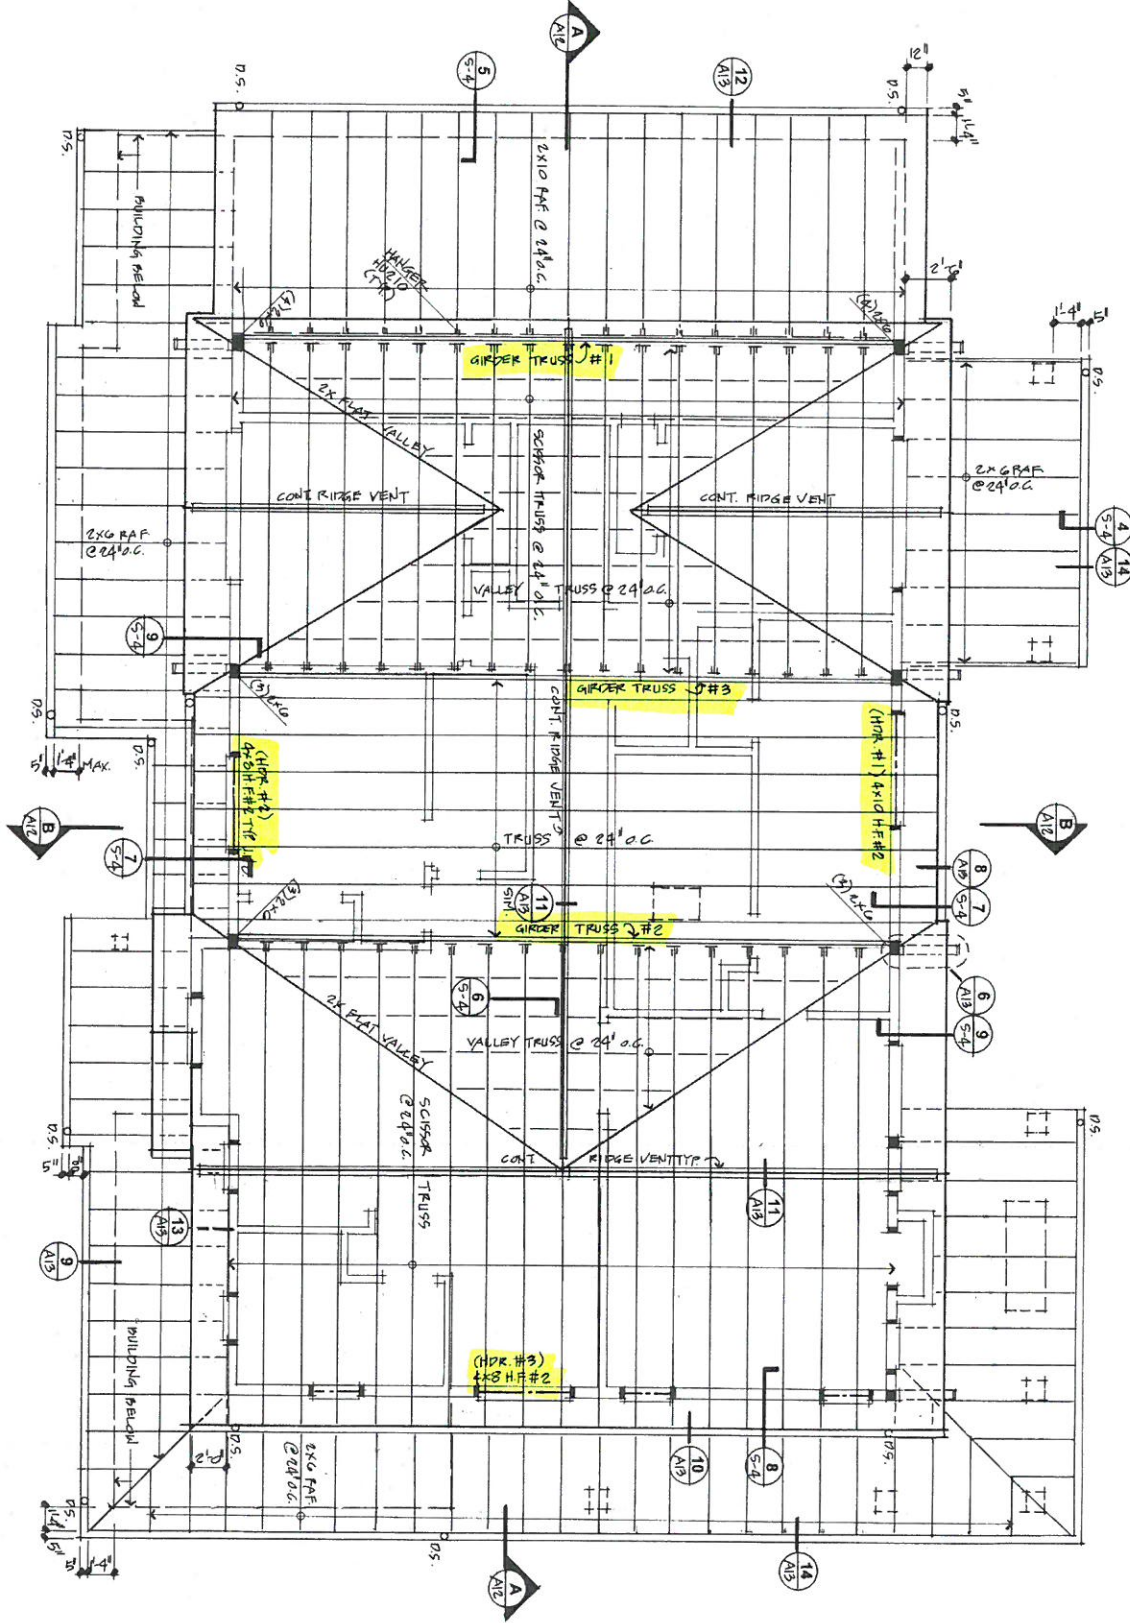

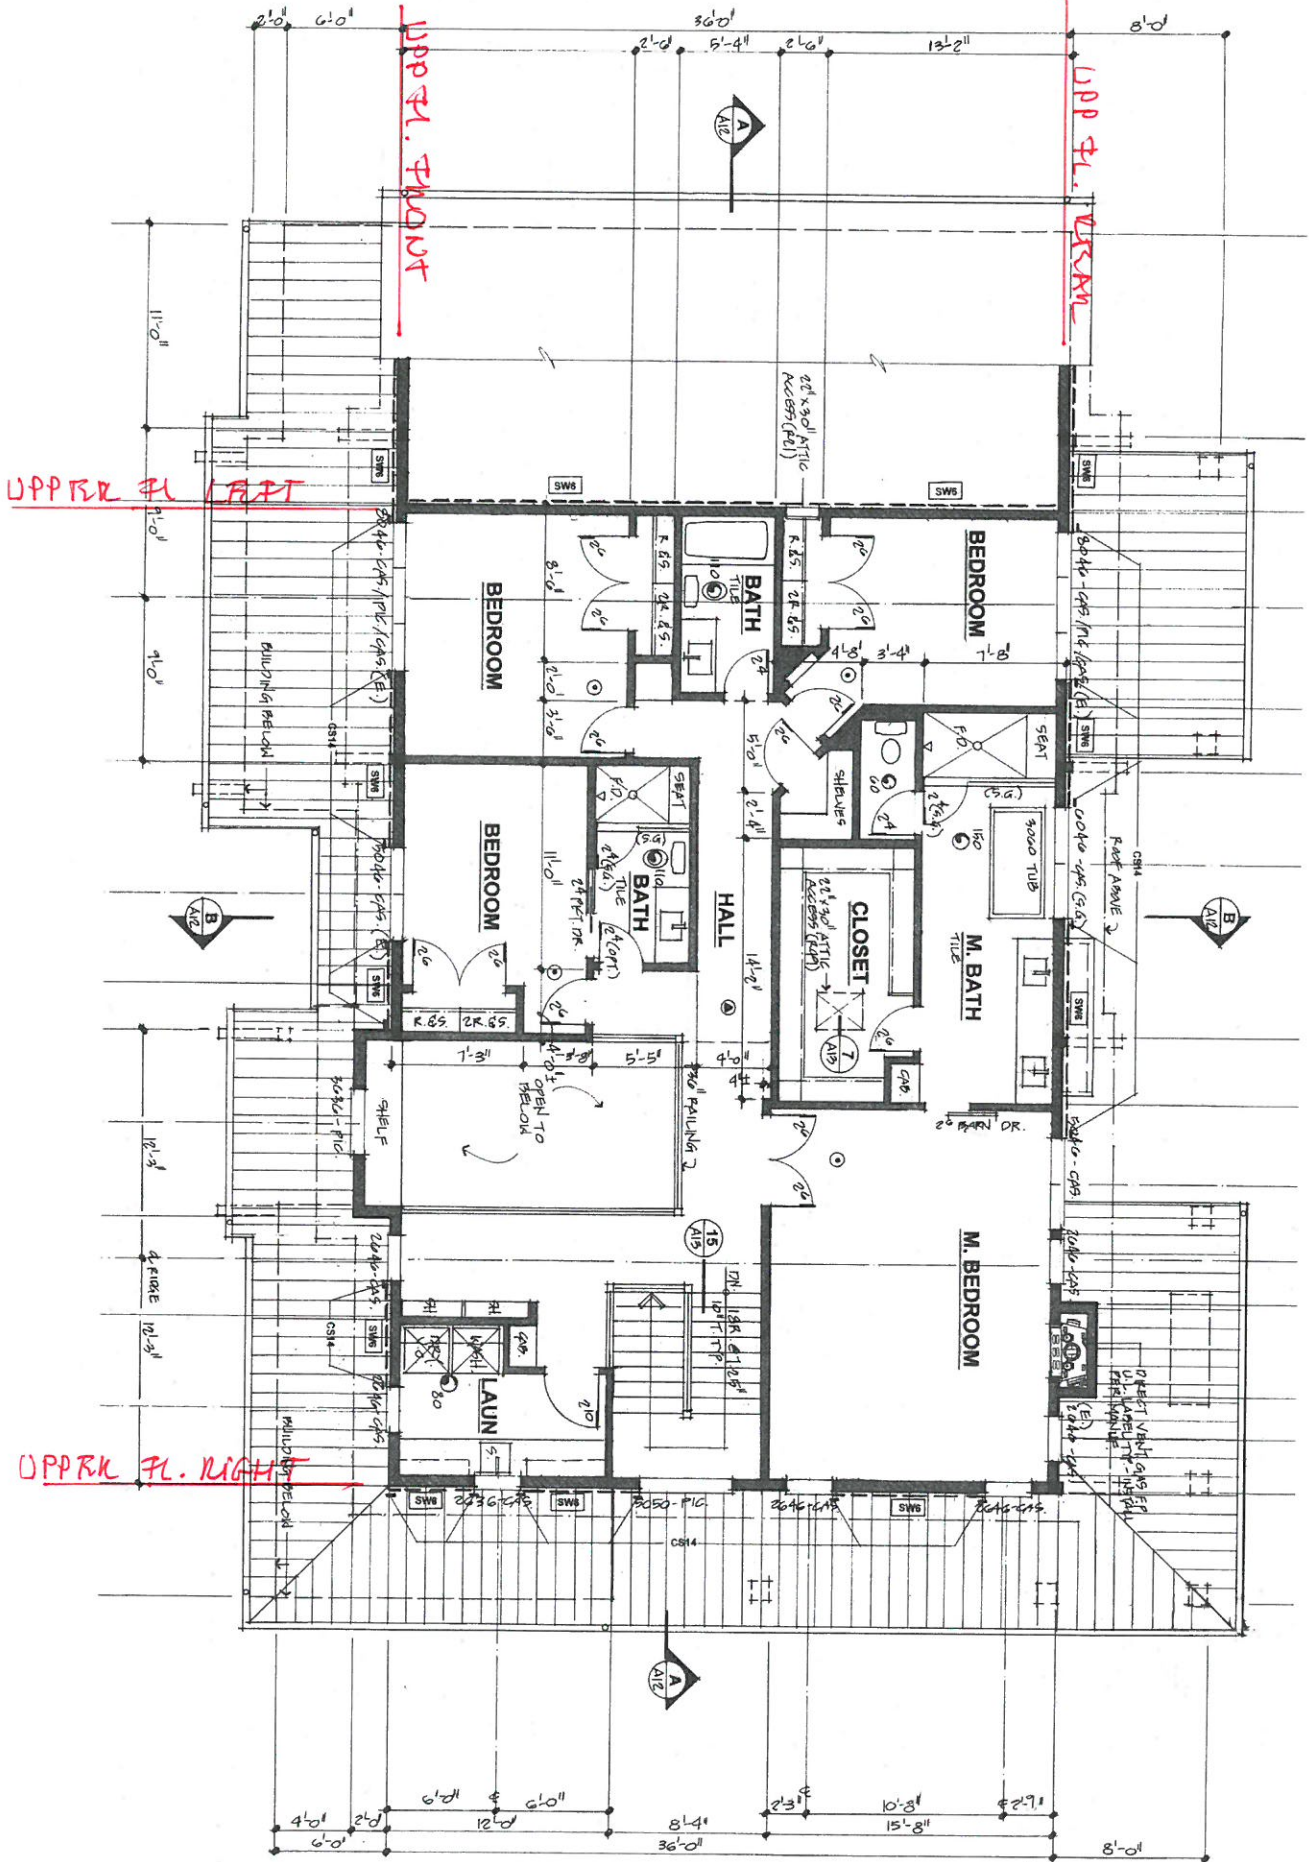


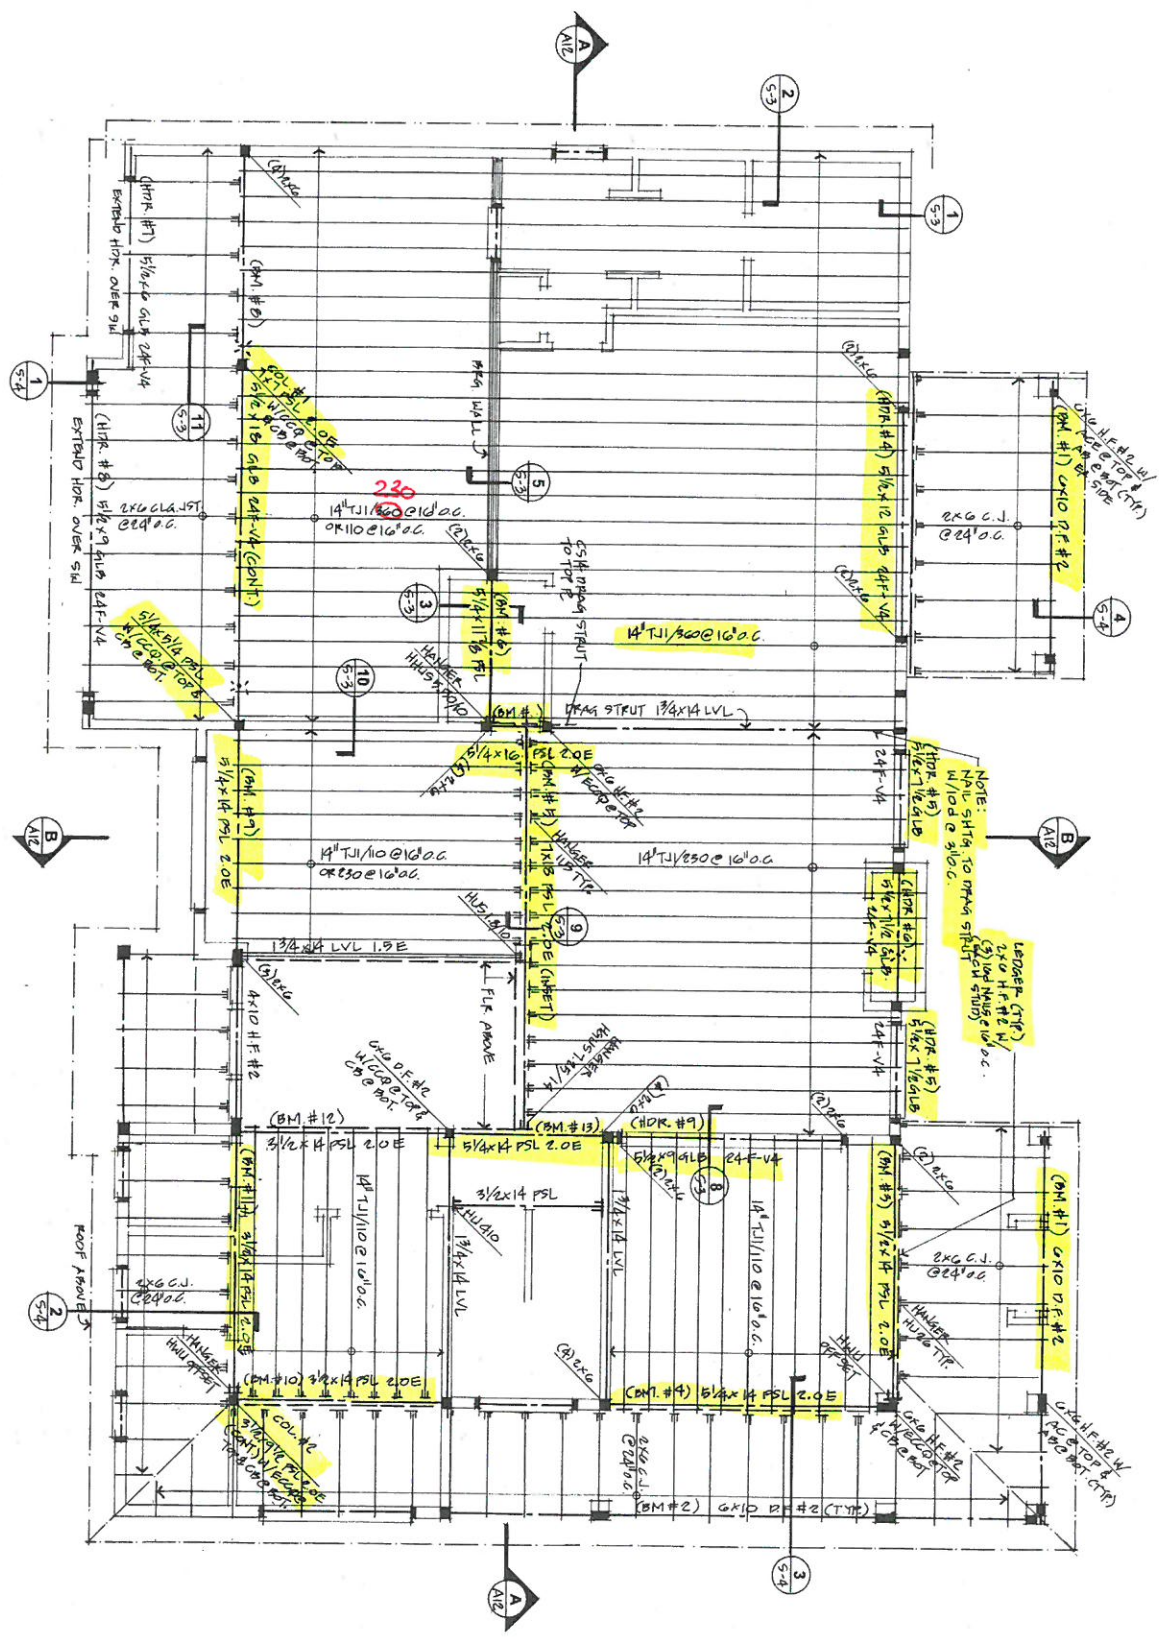


PLAN, ALL ROOMS TO BE FINISHED BY THE CONTRACTOR. SEE SPECIFICATIONS FOR FINISHES. SEE ELECTRICAL AND MECHANICAL SCHEDULES FOR EQUIPMENT SIZES AND LOCATIONS. SEE NOTES FOR DIMENSIONS AND FINISHES. SEE NOTES FOR INTERCONNECTIONS OF ELECTRICAL AND MECHANICAL SYSTEMS.

BE PROVIDED TO CUT AND FINISH AND TO PROVIDE ALL NECESSARY INTERCONNECTIONS OF ELECTRICAL AND MECHANICAL SYSTEMS. SEE NOTES FOR DIMENSIONS AND FINISHES.

ALL BE PROVIDED TO CUT AND FINISH AND TO PROVIDE ALL NECESSARY INTERCONNECTIONS OF ELECTRICAL AND MECHANICAL SYSTEMS. SEE NOTES FOR DIMENSIONS AND FINISHES.

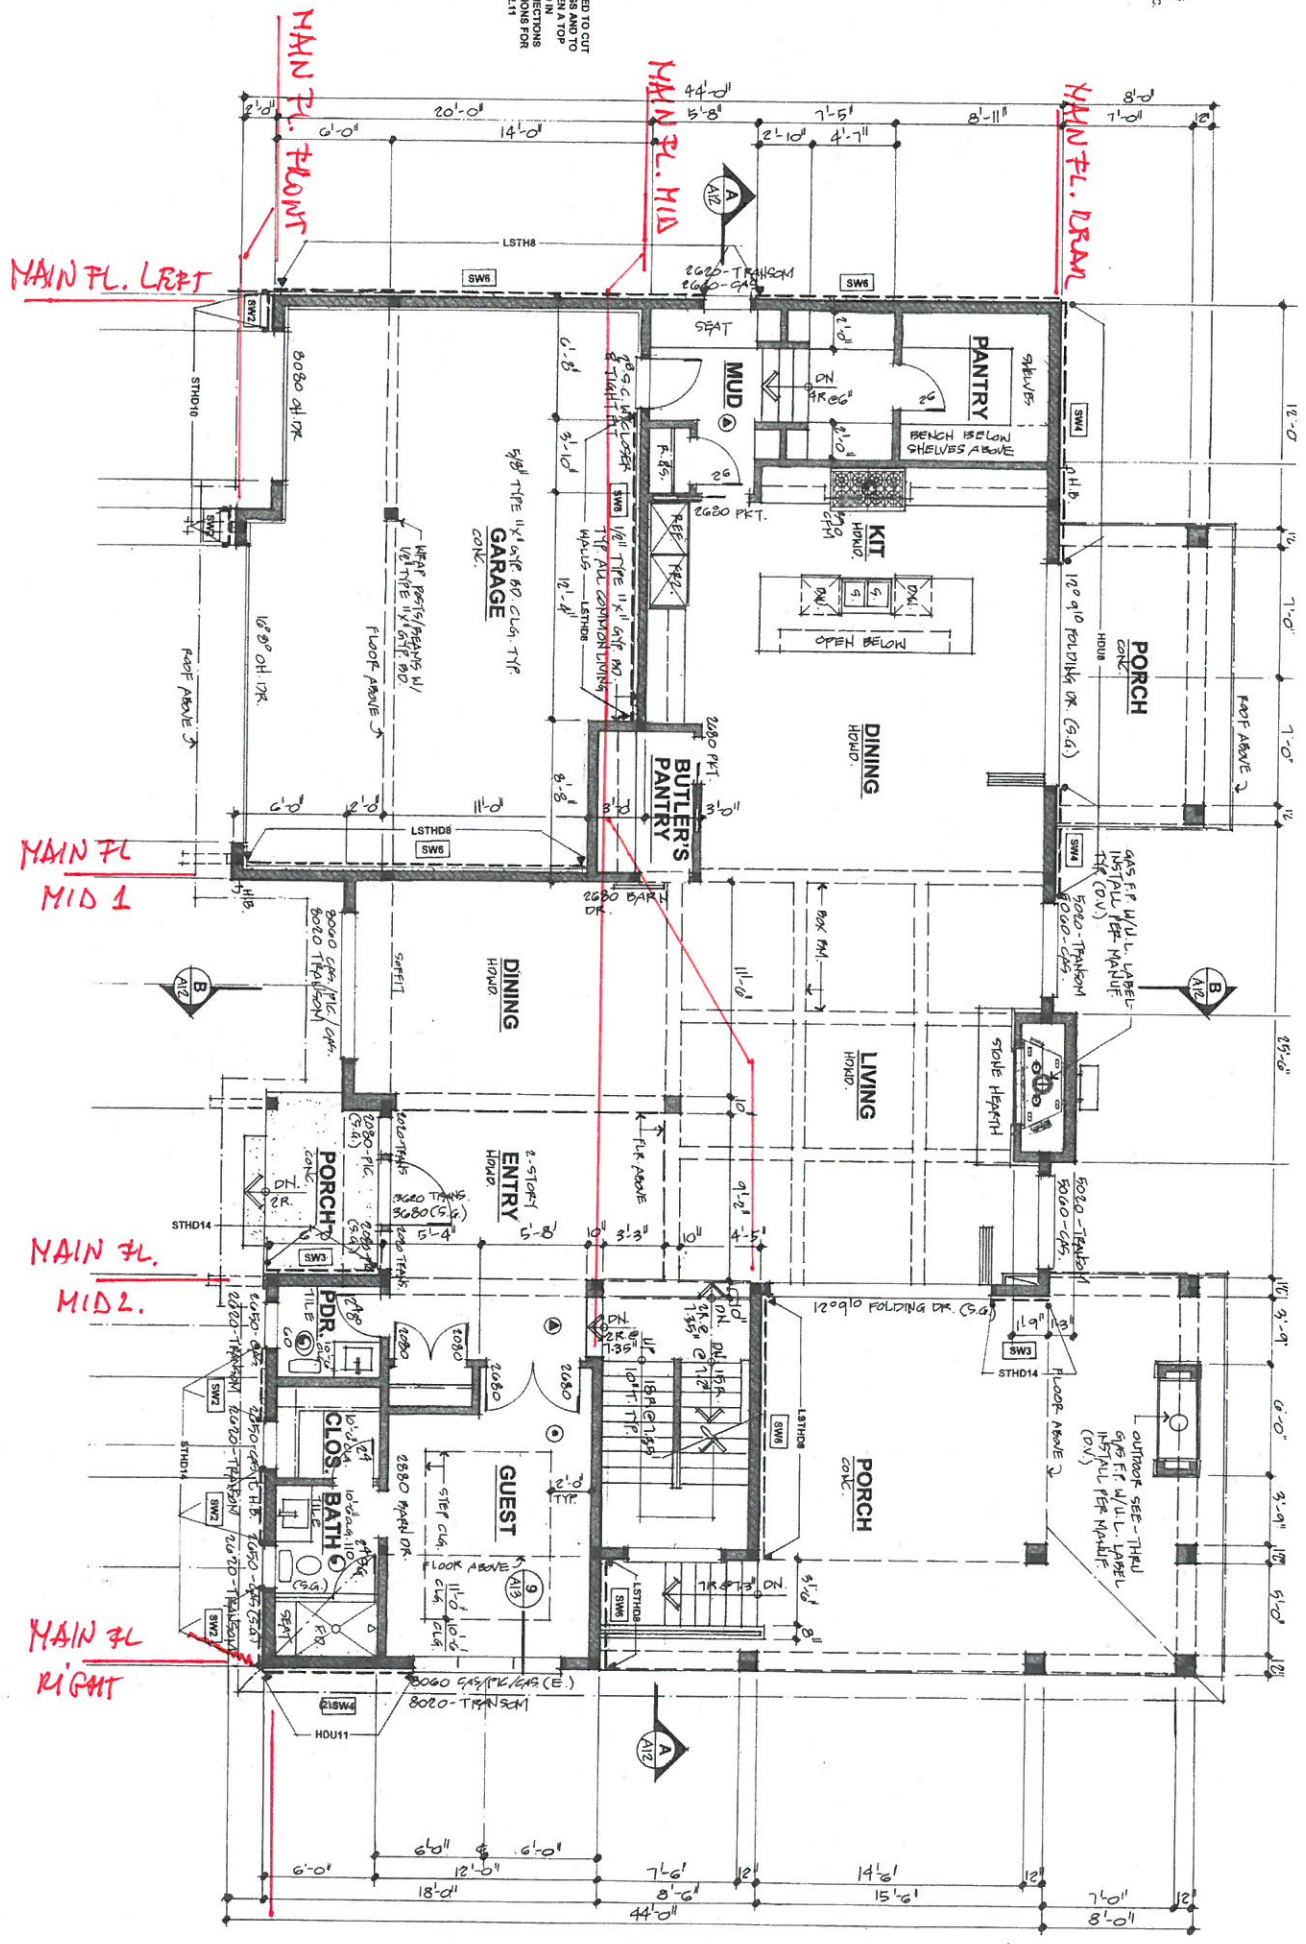


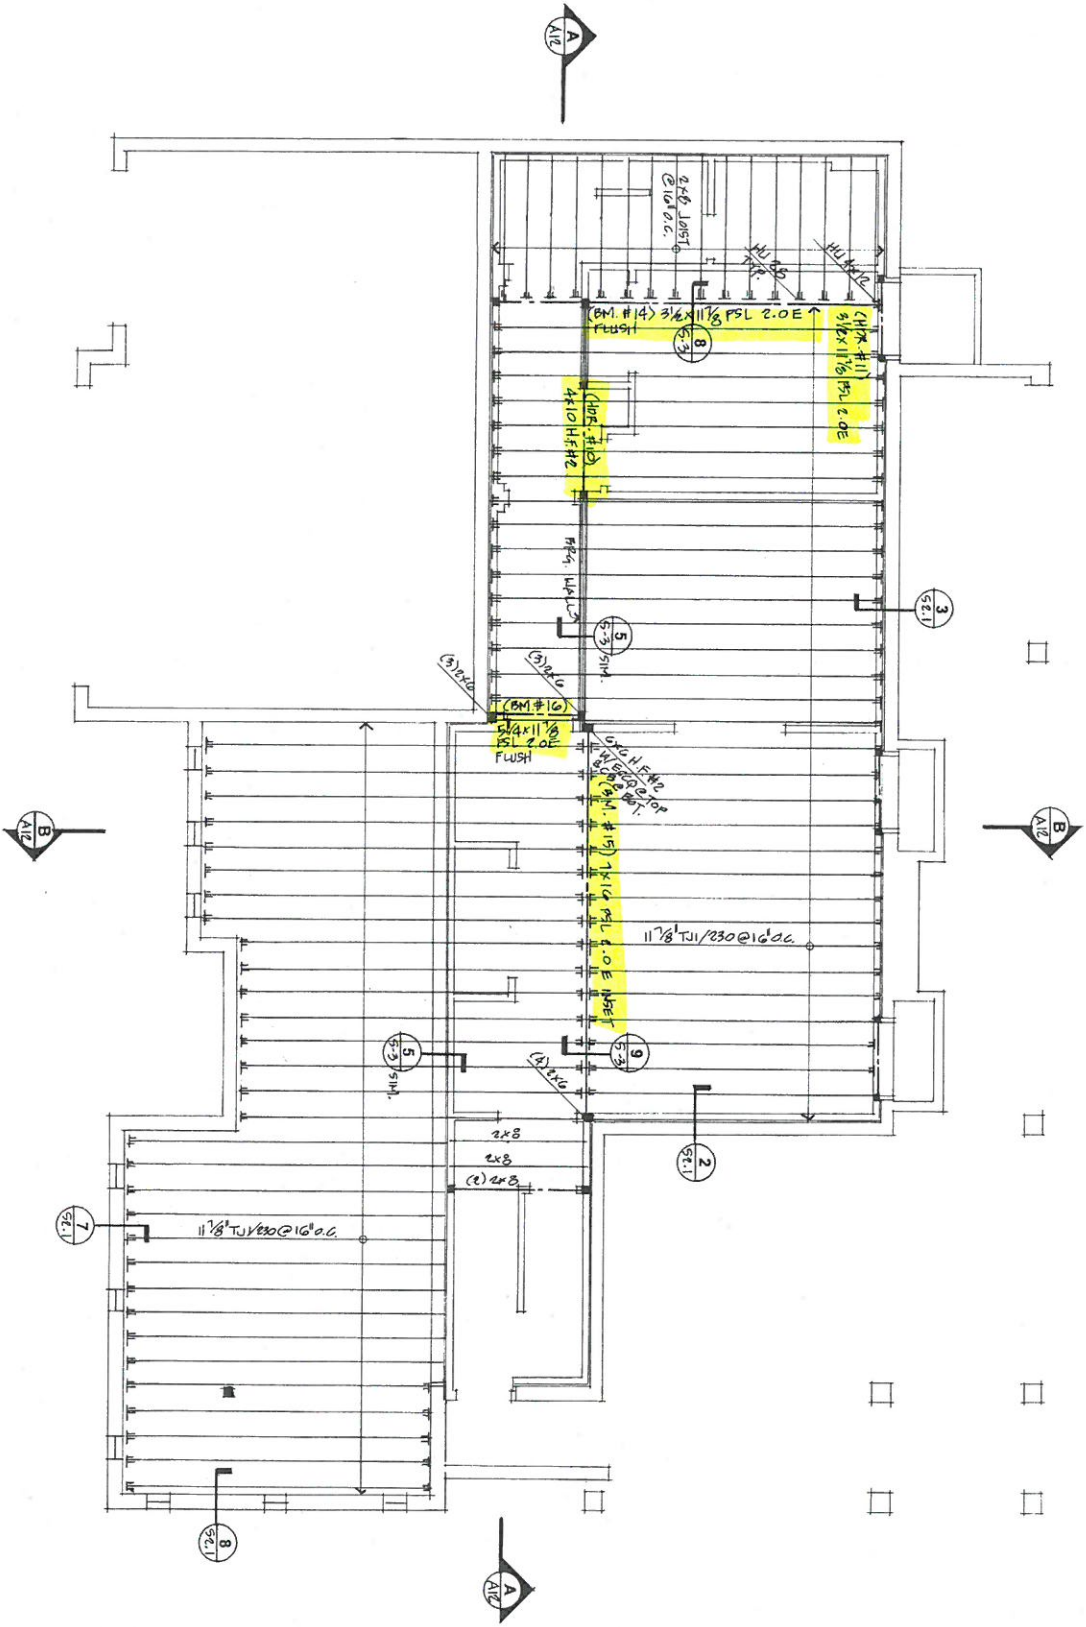

1 2 3 4 5 6 7 8 9 10 11 12

1 2 3 4 5 6 7 8 9 10 11 12



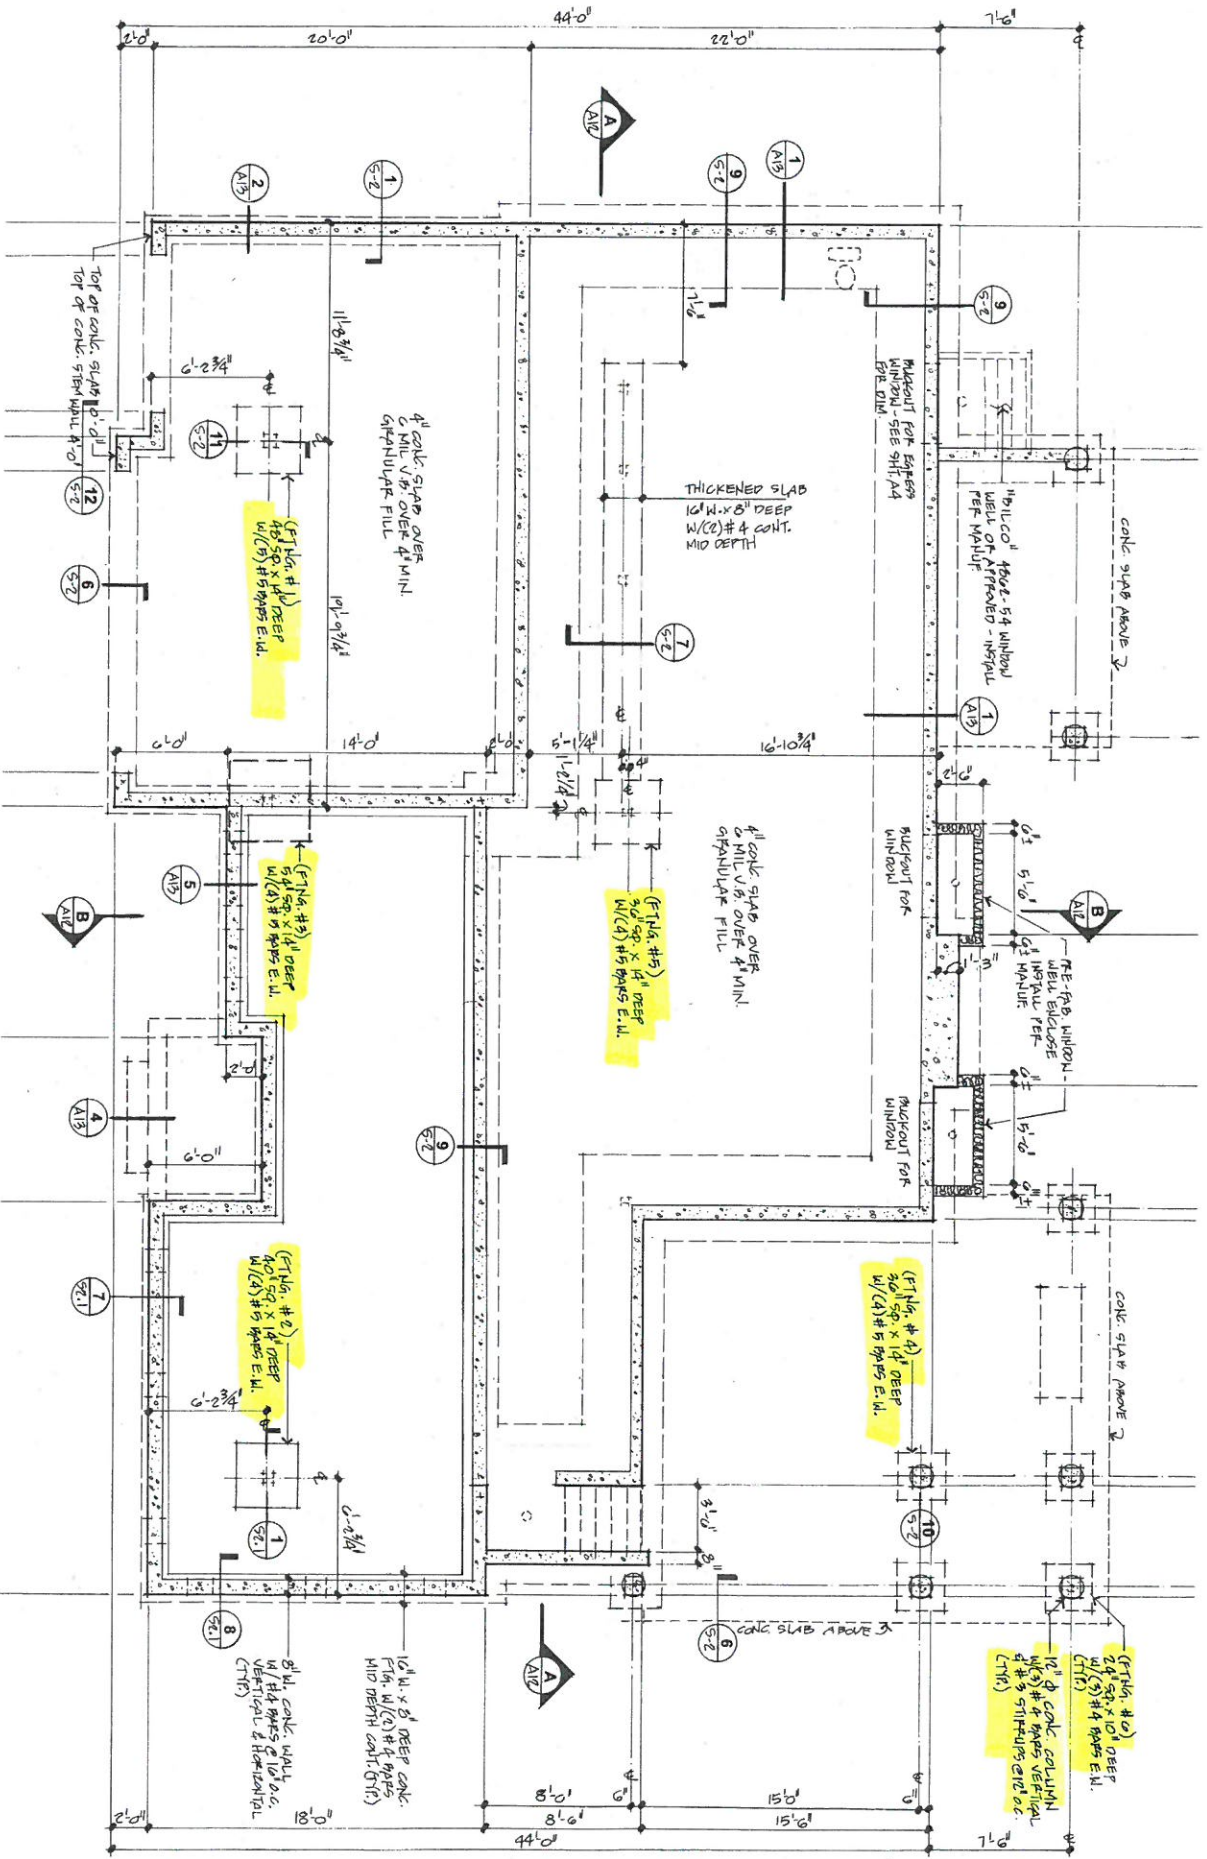

4" CONCRETE SLAB OVER
 6" MIL V.G. OVER 4" MIN. I.
 GRANULAR FILL

4" CONCRETE SLAB OVER
 6" MIL V.G. OVER 4" MIN. I.
 GRANULAR FILL

4" CONCRETE SLAB OVER
 6" MIL V.G. OVER 4" MIN. I.
 GRANULAR FILL

12" Ø CONCRETE COLUMN
 W/ (3) #4 BARS VERTICAL
 & (3) #5 STIFFENING GIRTS AT
 (TYP.)

THICKENED SLAB
 16" W. X 8" DEEP
 W/ (2) #4 CONT.
 MID DEEP

4" CONCRETE SLAB OVER
 6" MIL V.G. OVER 4" MIN. I.
 GRANULAR FILL

4" CONCRETE SLAB OVER
 6" MIL V.G. OVER 4" MIN. I.
 GRANULAR FILL

12" Ø CONCRETE COLUMN
 W/ (3) #4 BARS VERTICAL
 & (3) #5 STIFFENING GIRTS AT
 (TYP.)

MUDJACK FOR
 WINDOW - SEE SH/AD
 EPL D.M.

MUDJACK FOR
 WINDOW

MUDJACK FOR
 WINDOW

16" L.C. 1" HOLES - 5" DIA
 WELL OF APPROX. - INSTALL
 PER M.B.U.P.

FE-FIB WINDOW
 WITH ENCLOSE
 WITH INSULATION
 PER M.B.U.P.

4" Ø CONCRETE COLUMN
 W/ (3) #4 BARS VERTICAL
 & (3) #5 STIFFENING GIRTS AT
 (TYP.)