

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020		rev 06.02.20		

STRUCTURAL CALCULATIONS

FOR

THE

Sun Residence

Located at

2423 63RD AVE SE

Mercer Island, WA 98031



GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				2		

TABLE OF CONTENTS

TABLE OF CONTENTS	2
Dead load construction	4
Roof Assembly	4
Design Criteria_Floor Assembly	4
Dead load construction	4
Floor Assembly.....	4
B1	5
Structural wood Beam analysis & Design (NDS)	5
B2	8
Structural glued laminated timber (Glulam) Beam analysis & Design (NDS)	8
B3	12
Structural glued laminated timber (Glulam) Beam analysis & Design (NDS)	12
B4	15
Structural glued laminated timber (Glulam) Beam analysis & Design (NDS)	15
B5	18
Structural wood Beam analysis & Design (NDS)	18
B6	21
Structural wood Beam analysis & Design (NDS)	21
B7	24
Structural composite lumber Beam analysis & Design (NDS).....	24
B8	27
Structural wood Beam analysis & Design (NDS)	27
B9	30
Structural glued laminated timber (Glulam) Beam analysis & Design (NDS)	30
B10	34
Structural composite lumber Beam analysis & Design (NDS).....	34
B11	37
Structural wood Beam analysis & Design (NDS)	37
B12	40
Structural wood Beam analysis & Design (NDS)	40
B13- TYPICAL 2X FLOOR JOIST	43
Structural wood Beam analysis & Design (NDS)	43

<p style="text-align: center;">GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509</p>	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
				3		
Calc. by	Date	Chk'd by	Date	App'd by	Date	
GL	01-05-2020					

B14 – TYPICAL FIRST FLOOR WOOD BEAM.....	46
Structural wood Beam analysis & Design (NDS)	46
Wood connection (NDS).....	50
Bolted Timber to timber connection design (NDS 2015).....	50
Seismic forces (ASCE7).....	52
Seismic Forces (ASCE 7-10)	52
Wind loading (ASCE7-10)	53
wind loading (ASCE7-10).....	53

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

DEAD LOAD CONSTRUCTION

Roof Assembly

Material	Thickness (in)	γ (lb/ft ³)	Weight (lb/ft ²)
Asphalt Shingles;	0.250;	135;	2.8
1/2" Plywood or OSB;	0.500;	45;	1.9
Insulation;	12.000;	1;	1.0
2x Rafters;	1.000;	35;	2.9
Beams;	0.500;	35;	1.5
Gypsum Board;	0.625;	60;	3.1
Miscellaneous;	1.000;	;	1.8
Totals;			15.0

DESIGN CRITERIA FLOOR ASSEMBLY

DEAD LOAD CONSTRUCTION

Floor Assembly


Material	Thickness (in)	γ (lb/ft ³)	Weight (lb/ft ²)
Flooring;	0.125;	95;	1.0
3/4" Plywood or OSB;	0.750;	45;	2.8
2x Joists;	0.625;	35;	1.8
Beams;	0.600;	35;	1.7
Gypsum Board;	0.625;	60;	3.1
Miscellaneous;	1.000;	;	1.5
Totals;	3.725;		12.0

;Live Load: 40 PSF

WIND SPEED: 110 MPH, EXPOSURE B.

SEISMIC : SDC D, RISK CATEGORY II.

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

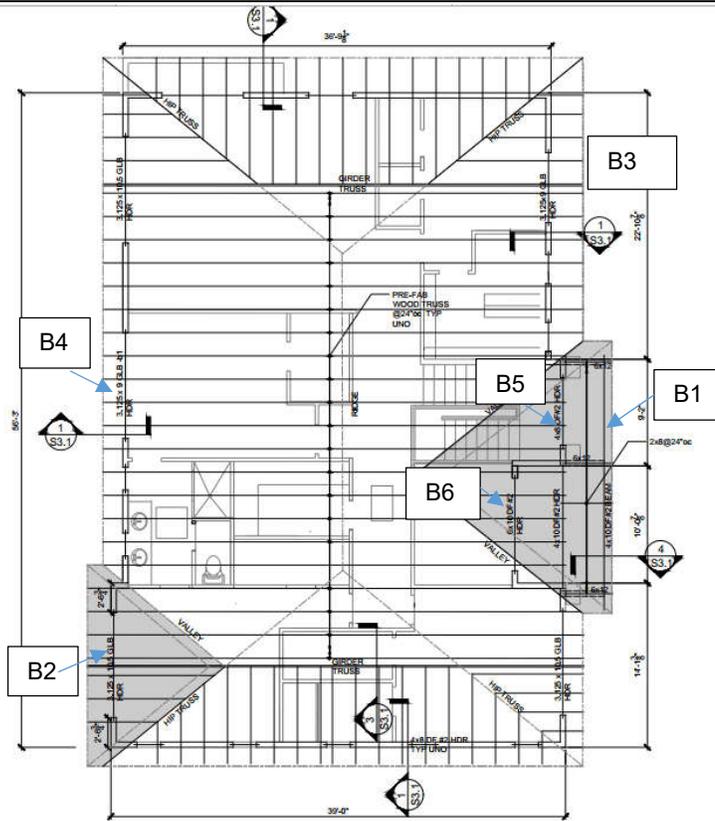


B1



STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03



GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				6		

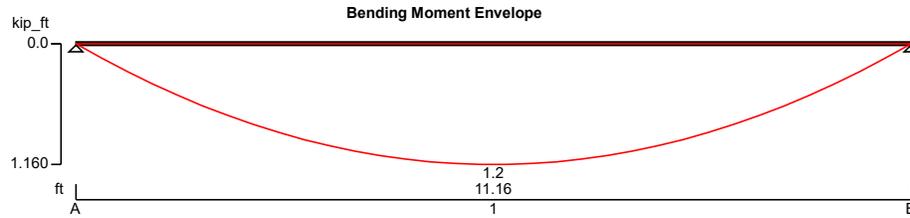

Applied loading

Beam loads

Dead self weight of beam × 1
 Dead full UDL 25 lb/ft
 Snow full UDL 42 lb/ft

Load combinations

Load combination 1

Support A	Dead × 1.00
	Live × 1.00
	Snow × 1.00
Span 1	Dead × 1.00
	Live × 1.00
	Snow × 1.00
Support B	Dead × 1.00
	Live × 1.00
	Snow × 1.00

Analysis results

Maximum moment;

$M_{max} = 1160 \text{ lb_ft};$ $M_{min} = 0 \text{ lb_ft}$

Design moment;

$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 1160 \text{ lb_ft}$

Maximum shear;

$F_{max} = 416 \text{ lb};$ $F_{min} = -416 \text{ lb}$

Design shear;

$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 416 \text{ lb}$

Total load on member;

$W_{tot} = 832 \text{ lb}$

Reaction at support A;

$R_{A_max} = 416 \text{ lb};$ $R_{A_min} = 416 \text{ lb}$

Unfactored dead load reaction at support A;

$R_{A_Dead} = 184 \text{ lb}$

Unfactored snow load reaction at support A;

$R_{A_Snow} = 232 \text{ lb}$

Reaction at support B;


$R_{B_max} = 416 \text{ lb};$ $R_{B_min} = 416 \text{ lb}$

Unfactored dead load reaction at support B;

$R_{B_Dead} = 184 \text{ lb}$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Unfactored snow load reaction at support B; $R_{B_Snow} = 232 \text{ lb}$



Sawn lumber section details

Nominal breadth of sections;	$b_{nom} = 4 \text{ in}$
Dressed breadth of sections;	$b = 3.5 \text{ in}$
Nominal depth of sections;	$d_{nom} = 8 \text{ in}$
Dressed depth of sections;	$d = 7.25 \text{ in}$
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 3.5 \text{ in}$
Species, grade and size classification;	Hem-Fir, No.2 grade, 2" & wider
Bending parallel to grain;	$F_b = 850 \text{ lb/in}^2$
Tension parallel to grain;	$F_t = 525 \text{ lb/in}^2$
Compression parallel to grain;	$F_c = 1300 \text{ lb/in}^2$
Compression perpendicular to grain;	$F_{c_perp} = 405 \text{ lb/in}^2$
Shear parallel to grain;	$F_v = 150 \text{ lb/in}^2$
Modulus of elasticity;	$E = 1300000 \text{ lb/in}^2$
Modulus of elasticity, stability calculations;	$E_{min} = 470000 \text{ lb/in}^2$
Mean shear modulus;	$G_{def} = E / 16 = 81250 \text{ lb/in}^2$

Member details

Service condition;	Dry
Length of span;	$L_{st} = 11.16 \text{ ft}$
Length of bearing;	$L_b = 4 \text{ in}$
Load duration;	Two months

Section properties

Cross sectional area of member;	$A = N \times b \times d = 25.37 \text{ in}^2$
Section modulus;	$S_x = N \times b \times d^2 / 6 = 30.66 \text{ in}^3$
	$S_y = d \times (N \times b)^2 / 6 = 14.80 \text{ in}^3$
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 111.15 \text{ in}^4$
	$I_y = d \times (N \times b)^3 / 12 = 25.90 \text{ in}^4$

Adjustment factors

Load duration factor - Table 2.3.2;	$C_D = 1.15$
Temperature factor - Table 2.3.3;	$C_t = 1.00$
Size factor for bending - Table 4A;	$C_{Fb} = 1.30$
Size factor for tension - Table 4A;	$C_{Ft} = 1.20$
Size factor for compression - Table 4A;	$C_{Fc} = 1.05$
Flat use factor - Table 4A;	$C_{fu} = 1.05$
Incising factor for modulus of elasticity - Table 4.3.8	

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				8		

$$C_{iE} = 1.00$$

Incising factor for bending, shear, tension & compression - Table 4.3.8

$$C_i = 1.00$$

Incising factor for perpendicular compression - Table 4.3.8

$$C_{ic_perp} = 1.00$$

Repetitive member factor - cl.4.3.9;

$$C_r = 1.00$$

Bearing area factor - cl.3.10.4;

$$C_b = 1.00$$

Depth-to-breadth ratio;

$$d_{nom} / (N \times b_{nom}) = 2.00$$

- Beam is fully restrained

Beam stability factor - cl.3.3.3;

$$C_L = 1.00$$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain;

$$F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 405 \text{ lb/in}^2$$

Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 30 \text{ lb/in}^2$

$$f_{c_perp} / F_{c_perp}' = 0.073$$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;

$$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1271 \text{ lb/in}^2$$

Actual bending stress;

$$f_b = M / S_x = 454 \text{ lb/in}^2$$

$$f_b / F_b' = 0.357$$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t \times C_i = 173 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 25 \text{ lb/in}^2$$

$$f_v / F_v' = 0.143$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_{ME} \times C_t \times C_{iE} = 1300000 \text{ lb/in}^2$$

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = 0.562 \text{ in}$$

Total deflection;

$$\delta_{b_s1} = 0.180 \text{ in}$$

$$\delta_{b_s1} / \delta_{adm} = 0.320$$

PASS - Total deflection is less than design deflection


;

B2

STRUCTURAL GLUED LAMINATED TIMBER (GLULAM) BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

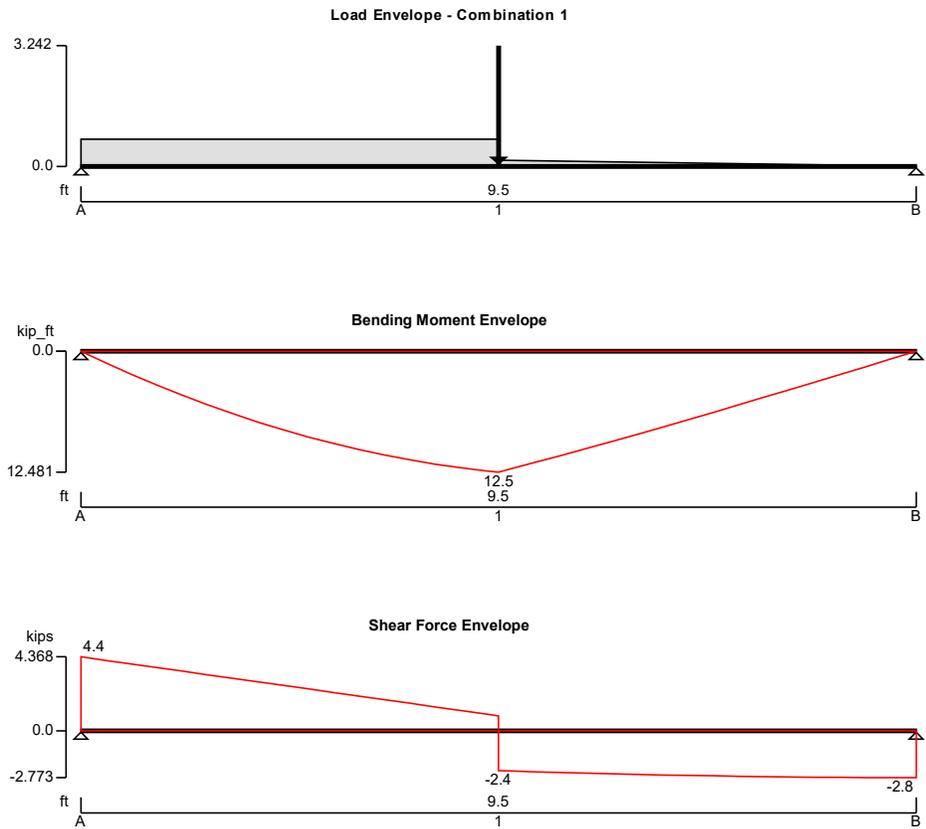

Applied loading

Beam loads

- Dead self weight of beam × 1
- Dead partial UDL 272 lb/ft from 0.00 in to 57.00 in
- Snow partial UDL 453 lb/ft from 0.00 in to 57.00 in
- Dead partial VDL 60 lb/ft at 57.00 in to 0 lb/ft at 114.00 in
- Snow partial VDL 100 lb/ft at 57.00 in to 0 lb/ft at 114.00 in
- Dead point load 1389 lb at 57.00 in
- Snow point load 1853 lb at 57.00 in

Load combinations

Load combination 1

Support A	Dead × 1.00
	Snow × 1.00
Span 1	Dead × 1.00
	Snow × 1.00
Support B	Dead × 1.00
	Snow × 1.00

Analysis results

Maximum moment;



$M_{max} = 12481 \text{ lb_ft};$

$M_{min} = 0 \text{ lb_ft}$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				10		

Design moment;
 Maximum shear;
 Design shear;
 Total load on member;
 Reaction at support A;
 Unfactored dead load reaction at support A;
 Unfactored snow load reaction at support A;
 Reaction at support B;
 Unfactored dead load reaction at support B;
 Unfactored snow load reaction at support B;

$M = \max(\text{abs}(M_{\max}), \text{abs}(M_{\min})) = 12481 \text{ lb_ft}$
 $F_{\max} = 4368 \text{ lb}; \quad F_{\min} = -2773 \text{ lb}$
 $F = \max(\text{abs}(F_{\max}), \text{abs}(F_{\min})) = 4368 \text{ lb}$
 $W_{\text{tot}} = 7141 \text{ lb}$
 $R_{A_{\max}} = 4368 \text{ lb}; \quad R_{A_{\min}} = 4368 \text{ lb}$
 $R_{A_{\text{Dead}}} = 1749 \text{ lb}$
 $R_{A_{\text{Snow}}} = 2620 \text{ lb}$
 $R_{B_{\max}} = 2773 \text{ lb}; \quad R_{B_{\min}} = 2773 \text{ lb}$
 $R_{B_{\text{Dead}}} = 1150 \text{ lb}$
 $R_{B_{\text{Snow}}} = 1623 \text{ lb}$



Glulam section details

Net finished breadth of sections; $b = 3.125 \text{ in}$
 Net finished depth of sections; $d = 10.5 \text{ in}$
 Number of sections in member; $N = 1$
 Overall breadth of member; $b_b = N \times b = 3.125 \text{ in}$
 Alignment of laminations; **Horizontal**
 Stress class; 24F-V4 DF/DF
 Tension parallel to grain; $F_t = 1100 \text{ lb/in}^2$
 Compression parallel to grain; $F_c = 1650 \text{ lb/in}^2$
 Bending about X-X axis properties (loaded perpendicular to wide faces of laminations):
 Positive bending; $F_{bx_pos} = 2400 \text{ lb/in}^2$
 Negative bending; $F_{bx_neg} = 1850 \text{ lb/in}^2$
 Compression perpendicular to grain; $F_{c_perp} = 650 \text{ lb/in}^2$
 Shear parallel to grain; $F_v = 265 \text{ lb/in}^2$
 Modulus of elasticity; $E = 1800000 \text{ lb/in}^2$
 Modulus of elasticity, stability calculations; $E_{\min} = 950000 \text{ lb/in}^2$
 Mean shear modulus; $G_{\text{def}} = E / 16 = 112500 \text{ lb/in}^2$
 Bending about Y-Y axis properties (loaded parallel to wide faces of laminations):
 Bending; $F_{by} = 1450 \text{ lb/in}^2$
 Modulus of elasticity; stability calculations; $E_{y\min} = 850000 \text{ lb/in}^2$

Member details

Service condition; **Dry**
 Length of span; $L_{s1} = 9.5 \text{ ft}$
 Length of bearing; $L_b = 4 \text{ in}$
 Load duration; **Two months**

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				11		

Section properties

Cross sectional area of member; $A = N \times b \times d = 32.81 \text{ in}^2$
 Section modulus; $S_x = N \times b \times d^2 / 6 = 57.42 \text{ in}^3$
 $S_y = d \times (N \times b)^2 / 6 = 17.09 \text{ in}^3$
 Second moment of area; $I_x = N \times b \times d^3 / 12 = 301.46 \text{ in}^4$
 $I_y = d \times (N \times b)^3 / 12 = 26.70 \text{ in}^4$

Adjustment factors

Load duration factor - Table 2.3.2; $C_D = 1.15$
 Temperature factor - Table 2.3.3; $C_t = 1.00$
 Flat use factor - Table 5A; $C_{fu} = 1.16$
 Bearing area factor - cl.3.10.4; $C_b = 1.00$
 Length of beam between points of zero moment; $L_0 = 9.5 \text{ ft}$
 For species other than Southern Pine; $x = 10$
 Volume factor - eq.5.3-1; $C_V = \min((21 \text{ ft} / L_0)^{1/x} \times (12 \text{ in} / d)^{1/x} \times (5.125 \text{ in} / b)^{1/x}, 1) = 1.00$
 Depth-to-breadth ratio; $d / (N \times b) = 3.36$
 - Beam is fully restrained
 Beam stability factor - cl.3.3.3; $C_L = 1.00$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_b = 650 \text{ lb/in}^2$
 Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 349 \text{ lb/in}^2$
 $f_{c_perp} / F_{c_perp}' = 0.538$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress; $F_b' = F_{bx_pos} \times C_D \times C_t \times \min(C_L, C_V) \times C_c = 2760 \text{ lb/in}^2$
 Actual bending stress; $f_b = M_{max} / S_x = 2608 \text{ lb/in}^2$
 $f_b / F_b' = 0.945$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress; $F_v' = F_v \times C_D \times C_t = 305 \text{ lb/in}^2$
 Actual shear stress - eq.3.4-2; $f_v = 3 \times F / (2 \times A) = 200 \text{ lb/in}^2$
 $f_v / F_v' = 0.655$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection; $E' = E_x \times C_{ME} \times C_t = 1800000 \text{ lb/in}^2$
 Design deflection; $\delta_{adm} = 0.0042 \times L_{s1} = 0.479 \text{ in}$
 Total deflection; $\delta_{b_s1} = 0.327 \text{ in}$
 $\delta_{b_s1} / \delta_{adm} = 0.683$

PASS - Total deflection is less than design deflection

;




GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

B3

STRUCTURAL GLUED LAMINATED TIMBER (GLULAM) BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

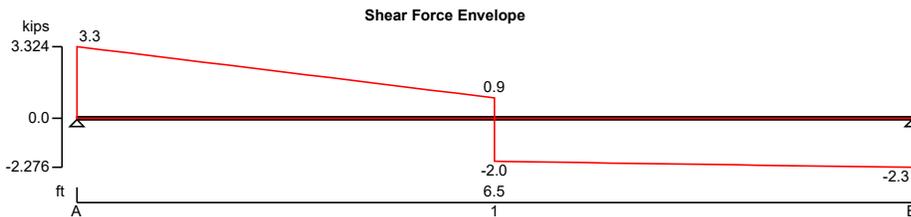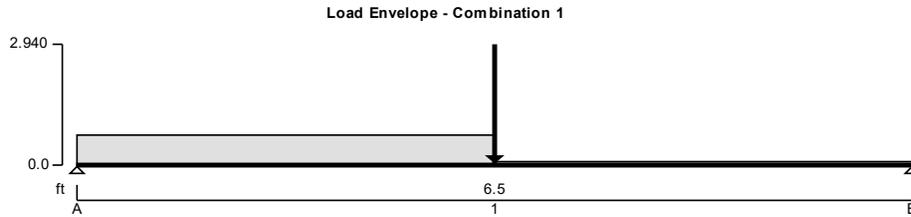

Applied loading

Beam loads

- Dead self weight of beam × 1
- Dead partial UDL 272 lb/ft from 0.00 in to 39.00 in
- Snow partial UDL 453 lb/ft from 0.00 in to 39.00 in
- Dead partial UDL 30 lb/ft from 39.00 in to 78.00 in
- Snow partial UDL 50 lb/ft from 39.00 in to 78.00 in
- Dead point load 1103 lb at 39.00 in
- Snow point load 1838 lb at 39.00 in

Load combinations

Load combination 1	Support A	Dead × 1.00
		Snow × 1.00
	Span 1	Dead × 1.00



GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Support B

Snow × 1.00
 Dead × 1.00
 Snow × 1.00

Analysis results

Maximum moment;	$M_{max} = 6939 \text{ lb_ft};$	$M_{min} = 0 \text{ lb_ft}$
Design moment;	$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 6939 \text{ lb_ft}$	
Maximum shear;	$F_{max} = 3324 \text{ lb};$	$F_{min} = -2276 \text{ lb}$
Design shear;	$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 3324 \text{ lb}$	
Total load on member;	$W_{tot} = 5601 \text{ lb}$	
Reaction at support A;	$R_{A_max} = 3324 \text{ lb};$	$R_{A_min} = 3324 \text{ lb}$
Unfactored dead load reaction at support A;	$R_{A_Dead} = 1261 \text{ lb}$	
Unfactored snow load reaction at support A;	$R_{A_Snow} = 2064 \text{ lb}$	
Reaction at support B;	$R_{B_max} = 2276 \text{ lb};$	$R_{B_min} = 2276 \text{ lb}$
Unfactored dead load reaction at support B;	$R_{B_Dead} = 867 \text{ lb}$	
Unfactored snow load reaction at support B;	$R_{B_Snow} = 1409 \text{ lb}$	



Glulam section details

Net finished breadth of sections;	$b = 3.125 \text{ in}$
Net finished depth of sections;	$d = 9 \text{ in}$
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 3.125 \text{ in}$
Alignment of laminations;	Horizontal
Stress class;	24F-V4 DF/DF
Tension parallel to grain;	$F_t = 1100 \text{ lb/in}^2$
Compression parallel to grain;	$F_c = 1650 \text{ lb/in}^2$
Bending about X-X axis properties (loaded perpendicular to wide faces of laminations):	
Positive bending;	$F_{bx_pos} = 2400 \text{ lb/in}^2$
Negative bending;	$F_{bx_neg} = 1850 \text{ lb/in}^2$
Compression perpendicular to grain;	$F_{c_perp} = 650 \text{ lb/in}^2$
Shear parallel to grain;	$F_v = 265 \text{ lb/in}^2$
Modulus of elasticity;	$E = 1800000 \text{ lb/in}^2$
Modulus of elasticity, stability calculations;	$E_{min} = 950000 \text{ lb/in}^2$
Mean shear modulus;	$G_{def} = E / 16 = 112500 \text{ lb/in}^2$
Bending about Y-Y axis properties (loaded parallel to wide faces of laminations):	
Bending;	$F_{by} = 1450 \text{ lb/in}^2$
Modulus of elasticity; stability calculations;	$E_{ymin} = 850000 \text{ lb/in}^2$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				14		

Member details

Service condition; **Dry**
 Length of span; $L_{s1} = 6.5$ ft
 Length of bearing; $L_b = 4$ in
 Load duration; **Two months**

Section properties

Cross sectional area of member; $A = N \times b \times d = 28.13$ in²
 Section modulus; $S_x = N \times b \times d^2 / 6 = 42.19$ in³
 $S_y = d \times (N \times b)^2 / 6 = 14.65$ in³
 Second moment of area; $I_x = N \times b \times d^3 / 12 = 189.84$ in⁴
 $I_y = d \times (N \times b)^3 / 12 = 22.89$ in⁴

Adjustment factors

Load duration factor - Table 2.3.2; $C_D = 1.15$
 Temperature factor - Table 2.3.3; $C_t = 1.00$
 Flat use factor - Table 5A; $C_{fu} = 1.16$
 Bearing area factor - cl.3.10.4; $C_b = 1.00$
 Length of beam between points of zero moment; $L_0 = 6.5$ ft
 For species other than Southern Pine; $x = 10$
 Volume factor - eq.5.3-1; $C_V = \min((21 \text{ ft} / L_0)^{1/x} \times (12 \text{ in} / d)^{1/x} \times (5.125 \text{ in} / b)^{1/x}, 1) = 1.00$
 Depth-to-breadth ratio; $d / (N \times b) = 2.88$
 - Beam is fully restrained
 Beam stability factor - cl.3.3.3; $C_L = 1.00$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_b = 650$ lb/in²
 Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 266$ lb/in²
 $f_{c_perp} / F_{c_perp}' = 0.409$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress; $F_b' = F_{bx_pos} \times C_D \times C_t \times \min(C_L, C_V) \times C_c = 2760$ lb/in²
 Actual bending stress; $f_b = M_{max} / S_x = 1974$ lb/in²
 $f_b / F_b' = 0.715$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress; $F_v' = F_v \times C_D \times C_t = 305$ lb/in²
 Actual shear stress - eq.3.4-2; $f_v = 3 \times F / (2 \times A) = 177$ lb/in²
 $f_v / F_v' = 0.582$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection; $E' = E_x \times C_{ME} \times C_t = 1800000$ lb/in²
 Design deflection; $\delta_{adm} = 0.0042 \times L_{s1} = 0.328$ in
 Total deflection; $\delta_{b_s1} = 0.133$ in
 $\delta_{b_s1} / \delta_{adm} = 0.407$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				




PASS - Total deflection is less than design deflection

B4

STRUCTURAL GLUED LAMINATED TIMBER (GLULAM) BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

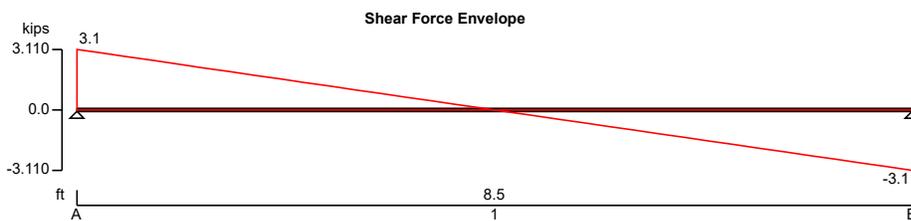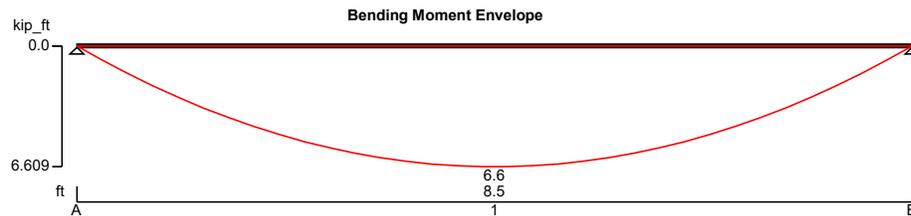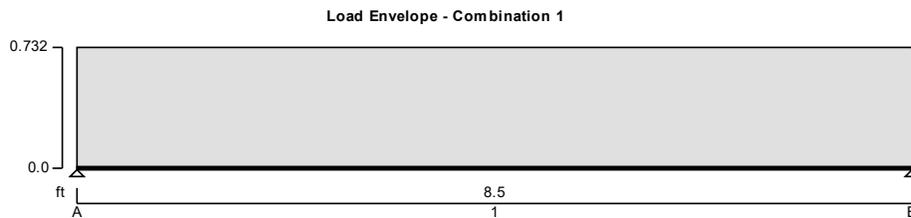

Applied loading

Beam loads

- Dead self weight of beam × 1
- Dead full UDL 272 lb/ft
- Snow full UDL 453 lb/ft

Load combinations

Load combination 1	Support A	Dead × 1.00
		Snow × 1.00
	Span 1	Dead × 1.00



GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Support B

Snow × 1.00
Dead × 1.00
Snow × 1.00

Analysis results

Maximum moment;	$M_{max} = 6609 \text{ lb_ft};$	$M_{min} = 0 \text{ lb_ft}$
Design moment;	$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 6609 \text{ lb_ft}$	
Maximum shear;	$F_{max} = 3110 \text{ lb};$	$F_{min} = -3110 \text{ lb}$
Design shear;	$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 3110 \text{ lb}$	
Total load on member;	$W_{tot} = 6221 \text{ lb}$	
Reaction at support A;	$R_{A_max} = 3110 \text{ lb};$	$R_{A_min} = 3110 \text{ lb}$
Unfactored dead load reaction at support A;	$R_{A_Dead} = 1185 \text{ lb}$	
Unfactored snow load reaction at support A;	$R_{A_Snow} = 1926 \text{ lb}$	
Reaction at support B;	$R_{B_max} = 3110 \text{ lb};$	$R_{B_min} = 3110 \text{ lb}$
Unfactored dead load reaction at support B;	$R_{B_Dead} = 1185 \text{ lb}$	
Unfactored snow load reaction at support B;	$R_{B_Snow} = 1926 \text{ lb}$	



Glulam section details

Net finished breadth of sections;	$b = 3.125 \text{ in}$
Net finished depth of sections;	$d = 9 \text{ in}$
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 3.125 \text{ in}$
Alignment of laminations;	Horizontal
Stress class;	24F-V4 DF/DF
Tension parallel to grain;	$F_t = 1100 \text{ lb/in}^2$
Compression parallel to grain;	$F_c = 1650 \text{ lb/in}^2$
Bending about X-X axis properties (loaded perpendicular to wide faces of laminations):	
Positive bending;	$F_{bx_pos} = 2400 \text{ lb/in}^2$
Negative bending;	$F_{bx_neg} = 1850 \text{ lb/in}^2$
Compression perpendicular to grain;	$F_{c_perp} = 650 \text{ lb/in}^2$
Shear parallel to grain;	$F_v = 265 \text{ lb/in}^2$
Modulus of elasticity;	$E = 1800000 \text{ lb/in}^2$
Modulus of elasticity, stability calculations;	$E_{min} = 950000 \text{ lb/in}^2$
Mean shear modulus;	$G_{def} = E / 16 = 112500 \text{ lb/in}^2$
Bending about Y-Y axis properties (loaded parallel to wide faces of laminations):	
Bending;	$F_{by} = 1450 \text{ lb/in}^2$
Modulus of elasticity; stability calculations;	$E_{ymin} = 850000 \text{ lb/in}^2$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project			Job Ref.	
	Sun Residence Mercer Island			1956	
	Section			Sheet no./rev.	
	Calc. by	Date	Chk'd by	Date	App'd by
	GL	01-05-2020			
					17

Member details

Service condition; **Dry**
 Length of span; $L_{s1} = 8.5$ ft
 Length of bearing; $L_b = 4$ in
 Load duration; **Two months**

Section properties

Cross sectional area of member; $A = N \times b \times d = 28.13$ in²
 Section modulus; $S_x = N \times b \times d^2 / 6 = 42.19$ in³
 $S_y = d \times (N \times b)^2 / 6 = 14.65$ in³
 Second moment of area; $I_x = N \times b \times d^3 / 12 = 189.84$ in⁴
 $I_y = d \times (N \times b)^3 / 12 = 22.89$ in⁴

Adjustment factors

Load duration factor - Table 2.3.2; $C_D = 1.15$
 Temperature factor - Table 2.3.3; $C_t = 1.00$
 Flat use factor - Table 5A; $C_{fu} = 1.16$
 Bearing area factor - cl.3.10.4; $C_b = 1.00$
 Length of beam between points of zero moment; $L_0 = 8.5$ ft
 For species other than Southern Pine; $x = 10$
 Volume factor - eq.5.3-1; $C_V = \min((21 \text{ ft} / L_0)^{1/x} \times (12 \text{ in} / d)^{1/x} \times (5.125 \text{ in} / b)^{1/x}, 1) = 1.00$
 Depth-to-breadth ratio; $d / (N \times b) = 2.88$
 - Beam is fully restrained
 Beam stability factor - cl.3.3.3; $C_L = 1.00$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_b = 650$ lb/in²
 Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 249$ lb/in²
 $f_{c_perp} / F_{c_perp}' = 0.383$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress; $F_b' = F_{bx_pos} \times C_D \times C_t \times \min(C_L, C_V) \times C_c = 2760$ lb/in²
 Actual bending stress; $f_b = M_{max} / S_x = 1880$ lb/in²
 $f_b / F_b' = 0.681$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress; $F_v' = F_v \times C_D \times C_t = 305$ lb/in²
 Actual shear stress - eq.3.4-2; $f_v = 3 \times F / (2 \times A) = 166$ lb/in²
 $f_v / F_v' = 0.544$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection; $E' = E_x \times C_{ME} \times C_t = 1800000$ lb/in²
 Design deflection; $\delta_{adm} = 0.0042 \times L_{s1} = 0.428$ in
 Total deflection; $\delta_{b_s1} = 0.252$ in
 $\delta_{b_s1} / \delta_{adm} = 0.587$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				




PASS - Total deflection is less than design deflection

B5

STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

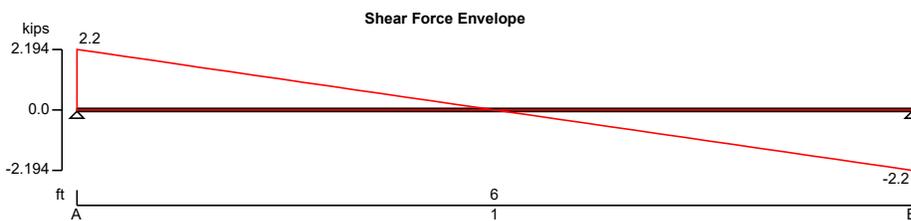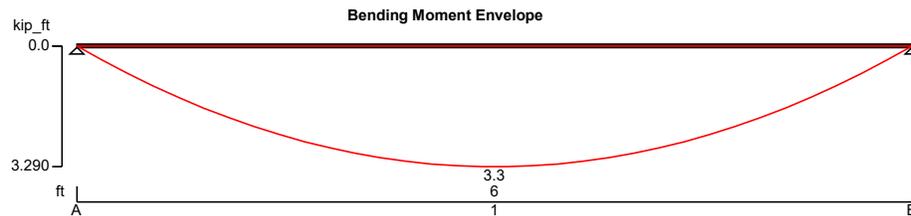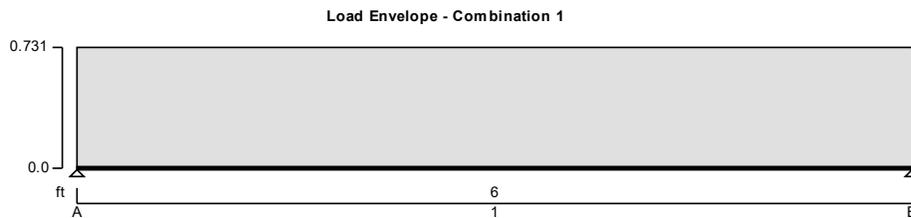

Applied loading

Beam loads

- Dead self weight of beam × 1
- Dead full UDL 272 lb/ft
- Snow full UDL 453 lb/ft

Load combinations

Load combination 1

- | | |
|-----------|-------------|
| Support A | Dead × 1.00 |
| | Snow × 1.00 |
| Span 1 | Dead × 1.00 |

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by	Date	Chk'd by	Date	App'd by	Date	
GL	01-05-2020					

Snow \times 1.00

Support B

Dead \times 1.00

Snow \times 1.00

Analysis results

Maximum moment;

$M_{max} = 3290 \text{ lb_ft}$;

$M_{min} = 0 \text{ lb_ft}$

Design moment;

$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 3290 \text{ lb_ft}$

Maximum shear;

$F_{max} = 2194 \text{ lb}$;

$F_{min} = -2194 \text{ lb}$

Design shear;

$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 2194 \text{ lb}$

Total load on member;

$W_{tot} = 4387 \text{ lb}$

Reaction at support A;

$R_{A_max} = 2194 \text{ lb}$;

$R_{A_min} = 2194 \text{ lb}$

Unfactored dead load reaction at support A;

$R_{A_Dead} = 834 \text{ lb}$

Unfactored snow load reaction at support A;

$R_{A_Snow} = 1359 \text{ lb}$

Reaction at support B;

$R_{B_max} = 2194 \text{ lb}$;


$R_{B_min} = 2194 \text{ lb}$

Unfactored dead load reaction at support B;

$R_{B_Dead} = 834 \text{ lb}$

Unfactored snow load reaction at support B;

$R_{B_Snow} = 1359 \text{ lb}$



Sawn lumber section details

Nominal breadth of sections;

$b_{nom} = 4 \text{ in}$

Dressed breadth of sections;

$b = 3.5 \text{ in}$

Nominal depth of sections;

$d_{nom} = 8 \text{ in}$

Dressed depth of sections;

$d = 7.25 \text{ in}$

Number of sections in member;

$N = 1$

Overall breadth of member;

$b_b = N \times b = 3.5 \text{ in}$

Species, grade and size classification;

Douglas Fir-Larch, No.2 grade, 2" & wider

Bending parallel to grain;

$F_b = 900 \text{ lb/in}^2$

Tension parallel to grain;

$F_t = 575 \text{ lb/in}^2$

Compression parallel to grain;

$F_c = 1350 \text{ lb/in}^2$

Compression perpendicular to grain;

$F_{c_perp} = 625 \text{ lb/in}^2$

Shear parallel to grain;

$F_v = 180 \text{ lb/in}^2$

Modulus of elasticity;

$E = 1600000 \text{ lb/in}^2$

Modulus of elasticity, stability calculations;

$E_{min} = 580000 \text{ lb/in}^2$

Mean shear modulus;

$G_{def} = E / 16 = 100000 \text{ lb/in}^2$

Member details

Service condition;

Dry

Length of span;

$L_{s1} = 6 \text{ ft}$

Length of bearing;

$L_b = 4 \text{ in}$

Load duration;

Two months

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				20		

Section properties

Cross sectional area of member;	$A = N \times b \times d = 25.37 \text{ in}^2$
Section modulus;	$S_x = N \times b \times d^2 / 6 = 30.66 \text{ in}^3$
	$S_y = d \times (N \times b)^2 / 6 = 14.80 \text{ in}^3$
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 111.15 \text{ in}^4$
	$I_y = d \times (N \times b)^3 / 12 = 25.90 \text{ in}^4$

Adjustment factors

Load duration factor - Table 2.3.2;	$C_D = 1.15$
Temperature factor - Table 2.3.3;	$C_t = 1.00$
Size factor for bending - Table 4A;	$C_{Fb} = 1.30$
Size factor for tension - Table 4A;	$C_{Ft} = 1.20$
Size factor for compression - Table 4A;	$C_{Fc} = 1.05$
Flat use factor - Table 4A;	$C_{fu} = 1.05$
Incising factor for modulus of elasticity - Table 4.3.8	$C_{IE} = 1.00$

Incising factor for bending, shear, tension & compression - Table 4.3.8

$$C_i = 1.00$$

Incising factor for perpendicular compression - Table 4.3.8

$$C_{ic_perp} = 1.00$$

Repetitive member factor - cl.4.3.9;

$$C_r = 1.00$$

Bearing area factor - cl.3.10.4;

$$C_b = 1.00$$

Depth-to-breadth ratio;

$$d_{nom} / (N \times b_{nom}) = 2.00$$

- Beam is fully restrained

Beam stability factor - cl.3.3.3;

$$C_L = 1.00$$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 625 \text{ lb/in}^2$

Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 157 \text{ lb/in}^2$

$$f_{c_perp} / F_{c_perp}' = 0.251$$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;

$$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1346 \text{ lb/in}^2$$

Actual bending stress;

$$f_b = M / S_x = 1288 \text{ lb/in}^2$$

$$f_b / F_b' = 0.957$$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t \times C_i = 207 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 130 \text{ lb/in}^2$$

$$f_v / F_v' = 0.626$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_{ME} \times C_t \times C_{IE} = 1600000 \text{ lb/in}^2$$

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = 0.302 \text{ in}$$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Total deflection;

$$\delta_{b,s1} = 0.120 \text{ in}$$

$$\delta_{b,s1} / \delta_{adm} = 0.396$$

PASS - Total deflection is less than design deflection




;

B6

STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

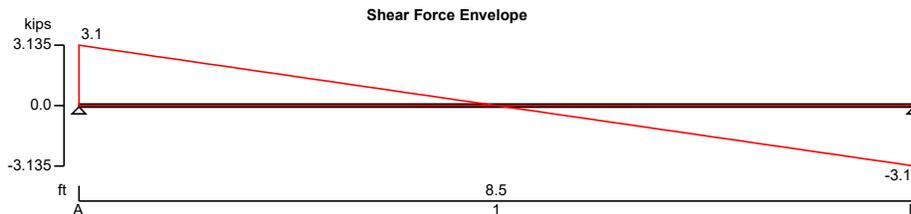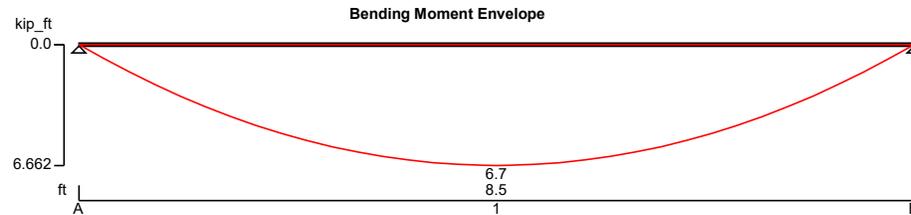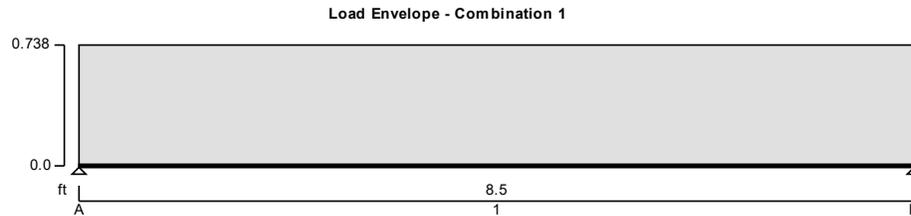

Applied loading

Beam loads

Dead self weight of beam $\times 1$

Dead full UDL 272 lb/ft

Snow full UDL 453 lb/ft

Load combinations

Load combination 1

Support A

Dead $\times 1.00$



GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				22		

Span 1	Snow × 1.00
	Dead × 1.00
	Snow × 1.00
Support B	Dead × 1.00
	Snow × 1.00

Analysis results

- Maximum moment;
- Design moment;
- Maximum shear;
- Design shear;
- Total load on member;
- Reaction at support A;
- Unfactored dead load reaction at support A;
- Unfactored snow load reaction at support A;
- Reaction at support B;
- Unfactored dead load reaction at support B;
- Unfactored snow load reaction at support B;

$M_{max} = 6662 \text{ lb_ft};$ $M_{min} = 0 \text{ lb_ft}$
 $M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 6662 \text{ lb_ft}$
 $F_{max} = 3135 \text{ lb};$ $F_{min} = -3135 \text{ lb}$
 $F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 3135 \text{ lb}$
 $W_{tot} = 6270 \text{ lb}$
 $R_{A_max} = 3135 \text{ lb};$ $R_{A_min} = 3135 \text{ lb}$
 $R_{A_Dead} = 1209 \text{ lb}$
 $R_{A_Snow} = 1926 \text{ lb}$
 $R_{B_max} = 3135 \text{ lb};$ $R_{B_min} = 3135 \text{ lb}$
 $R_{B_Dead} = 1209 \text{ lb}$
 $R_{B_Snow} = 1926 \text{ lb}$



Sawn lumber section details

- Nominal breadth of sections;
- Dressed breadth of sections;
- Nominal depth of sections;
- Dressed depth of sections;
- Number of sections in member;
- Overall breadth of member;
- Species, grade and size classification;
- Bending parallel to grain;
- Tension parallel to grain;
- Compression parallel to grain;
- Compression perpendicular to grain;
- Shear parallel to grain;
- Modulus of elasticity;
- Modulus of elasticity, stability calculations;
- Mean shear modulus;

$b_{nom} = 6 \text{ in}$
 $b = 5.5 \text{ in}$
 $d_{nom} = 10 \text{ in}$
 $d = 9.5 \text{ in}$
 $N = 1$
 $b_b = N \times b = 5.5 \text{ in}$
 Douglas Fir-Larch, No.2 grade, Beams and stringers
 $F_b = 875 \text{ lb/in}^2$
 $F_t = 425 \text{ lb/in}^2$
 $F_c = 600 \text{ lb/in}^2$
 $F_{c_perp} = 625 \text{ lb/in}^2$
 $F_v = 170 \text{ lb/in}^2$
 $E = 1300000 \text{ lb/in}^2$
 $E_{min} = 470000 \text{ lb/in}^2$
 $G_{def} = E / 16 = 81250 \text{ lb/in}^2$

Member details

- Service condition; **Dry**
- Length of span; $L_{s1} = 8.5 \text{ ft}$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				23		

Length of bearing;

$$L_b = 4 \text{ in}$$

Load duration;

Two months

Section properties

Cross sectional area of member;

$$A = N \times b \times d = 52.25 \text{ in}^2$$

Section modulus;

$$S_x = N \times b \times d^2 / 6 = 82.73 \text{ in}^3$$

$$S_y = d \times (N \times b)^2 / 6 = 47.90 \text{ in}^3$$

Second moment of area;

$$I_x = N \times b \times d^3 / 12 = 392.96 \text{ in}^4$$

$$I_y = d \times (N \times b)^3 / 12 = 131.71 \text{ in}^4$$

Adjustment factors

Load duration factor - Table 2.3.2;

$$C_D = 1.15$$

Temperature factor - Table 2.3.3;

$$C_t = 1.00$$

Size factor for bending - Table 4D;

$$C_{Fb} = 1.00$$

Size factor for tension - Table 4D;

$$C_{Ft} = 1.00$$

Size factor for compression - Table 4D;

$$C_{Fc} = 1.00$$

Flat use factor - Table 4D;

$$C_{fu} = 1.00$$

Incising factor for modulus of elasticity - Table 4.3.8

$$C_{iE} = 1.00$$

Incising factor for bending, shear, tension & compression - Table 4.3.8

$$C_i = 1.00$$

Incising factor for perpendicular compression - Table 4.3.8

$$C_{ic_perp} = 1.00$$

Repetitive member factor - cl.4.3.9;

$$C_r = 1.00$$

Bearing area factor - cl.3.10.4;

$$C_b = 1.00$$

Depth-to-breadth ratio;

$$d_{nom} / (N \times b_{nom}) = 1.67$$

- Beam is fully restrained

Beam stability factor - cl.3.3.3;

$$C_L = 1.00$$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain;

$$F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 625 \text{ lb/in}^2$$

Applied compression stress perpendicular to grain;

$$f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 143 \text{ lb/in}^2$$

$$f_{c_perp} / F_{c_perp}' = 0.228$$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;

$$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1006 \text{ lb/in}^2$$

Actual bending stress;

$$f_b = M / S_x = 966 \text{ lb/in}^2$$

$$f_b / F_b' = 0.960$$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t \times C_i = 196 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 90 \text{ lb/in}^2$$

$$f_v / F_v' = 0.460$$

PASS - Design shear stress exceeds actual shear stress

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project			Job Ref.	
	Sun Residence Mercer Island			1956	
	Section			Sheet no./rev.	
Calc. by	Date	Chk'd by	Date	App'd by	Date
GL	01-05-2020				

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_{ME} \times C_t \times C_{IE} = 1300000 \text{ lb/in}^2$$

Design deflection;


$$\delta_{adm} = 0.0042 \times L_{s1} = 0.428 \text{ in}$$

Total deflection;

$$\delta_{b_{s1}} = 0.170 \text{ in}$$

$$\delta_{b_{s1}} / \delta_{adm} = 0.396$$

PASS - Total deflection is less than design deflection

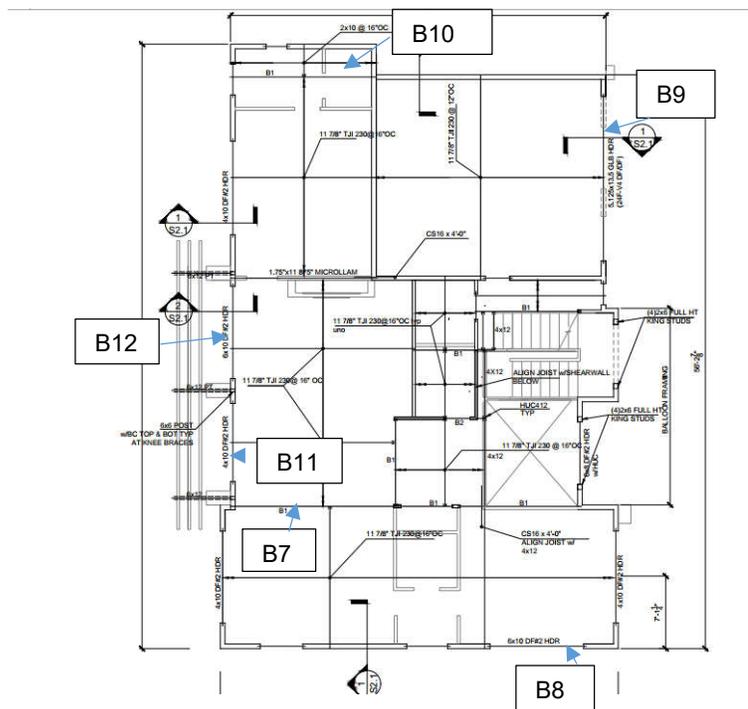


B7

STRUCTURAL COMPOSITE LUMBER BEAM ANALYSIS & DESIGN (NDS)



In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

Load Envelope - Combination 1

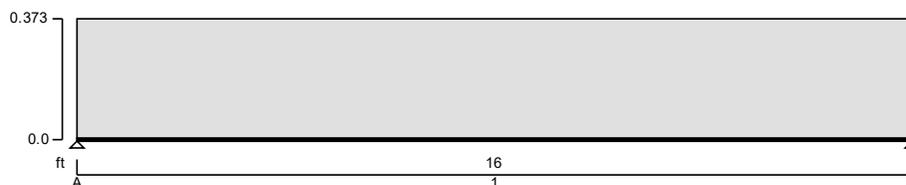

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

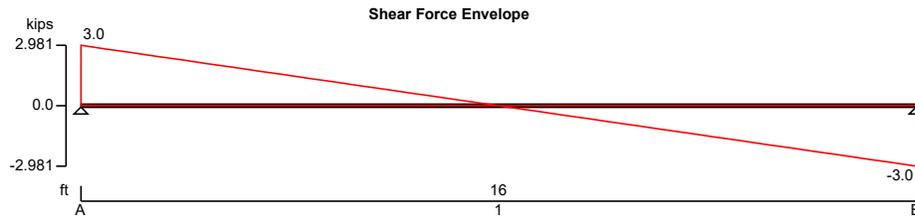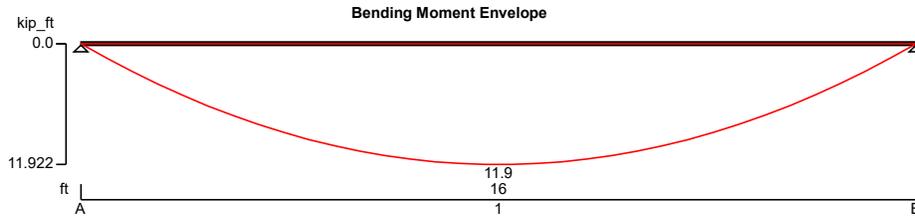

Applied loading

Beam loads

Dead self weight of beam \times 1
 Dead full UDL 83 lb/ft
 Live full UDL 277 lb/ft

Load combinations

Load combination 1

Support A	Dead \times 1.00
	Live \times 1.00
Span 1	Dead \times 1.00
	Live \times 1.00
Support B	Dead \times 1.00
	Live \times 1.00

Analysis results

Maximum moment;

$M_{max} = 11922$ lb_ft; $M_{min} = 0$ lb_ft

Design moment;

$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 11922$ lb_ft

Maximum shear;

$F_{max} = 2981$ lb; $F_{min} = -2981$ lb

Design shear;

$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 2981$ lb

Total load on member;

$W_{tot} = 5961$ lb

Reaction at support A;

$R_{A_{max}} = 2981$ lb; $R_{A_{min}} = 2981$ lb

Unfactored dead load reaction at support A;

$R_{A_{Dead}} = 768$ lb

Unfactored live load reaction at support A;

$R_{A_{Live}} = 2213$ lb

Reaction at support B;

$R_{B_{max}} = 2981$ lb; $R_{B_{min}} = 2981$ lb


Unfactored dead load reaction at support B;

$R_{B_{Dead}} = 768$ lb

Unfactored live load reaction at support B;

$R_{B_{Live}} = 2213$ lb

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
					26	

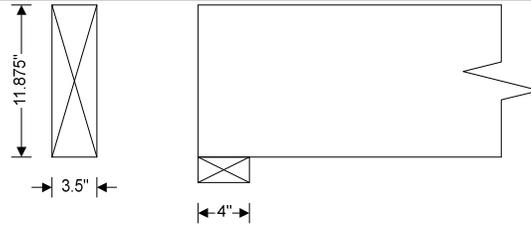

Composite section details

Breadth of composite section;	$b = 3.5$ in
Depth of composite section;	$d = 11.875$ in
Number of composite sections in member;	$N = 1$
Overall breadth of composite member;	$b_b = N \times b = 3.5$ in
Composite type and grade;	Parallam PSL, 2.0E-2900Fb grade
Bending parallel to grain;	$F_b = 2900$ lb/in ²
Tension parallel to grain;	$F_t = 2025$ lb/in ²
Compression parallel to grain;	$F_c = 2900$ lb/in ²
Compression perpendicular to grain;	$F_{c_perp} = 625$ lb/in ²
Shear parallel to grain;	$F_v = 290$ lb/in ²
Modulus of elasticity;	$E = 2000000$ lb/in ²
Modulus of elasticity, stability calculations;	$E_{min} = 1017000$ lb/in ²
Mean shear modulus;	$G_{def} = E / 16 = 125000$ lb/in ²
Average density;	$\rho = 45$ lb/ft ³

Member details

Service condition;	Dry
Length of span;	$L_{s1} = 16$ ft
Length of bearing;	$L_b = 4$ in
Load duration;	Two months

Section properties

Cross sectional area of member;	$A = N \times b \times d = 41.56$ in ²
Section modulus;	$S_x = N \times b \times d^2 / 6 = 82.26$ in ³
	$S_y = d \times (N \times b)^2 / 6 = 24.24$ in ³
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 488.41$ in ⁴
	$I_y = d \times (N \times b)^3 / 12 = 42.43$ in ⁴

Adjustment factors

Load duration factor - Table 2.3.2;	$C_D = 1.15$
Temperature factor - Table 2.3.3;	$C_t = 1.00$
Size factor for bending;	$C_{Fb} = (12 \text{ in} / \max(d, 3.5 \text{ in}))^{0.111} = 1.00$
Repetitive member factor - cl.8.3.7;	$C_r = 1.00$
Length factor;	$C_{Len} = 1.00$
Bearing area factor - cl.3.10.4;	$C_b = 1.00$
Depth-to-breadth ratio;	$d / (N \times b) = 3.39$
- Beam is fully restrained	

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				27		

Beam stability factor - cl.3.3.3;

$$C_L = 1.00$$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain;

$$F_{c_perp}' = F_{c_perp} \times C_t \times C_b = 625 \text{ lb/in}^2$$

Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 213 \text{ lb/in}^2$

$$f_{c_perp} / F_{c_perp}' = 0.341$$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;

$$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_r = 3339 \text{ lb/in}^2$$

Actual bending stress;

$$f_b = M / S_x = 1739 \text{ lb/in}^2$$

$$f_b / F_b' = 0.521$$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t = 334 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 108 \text{ lb/in}^2$$

$$f_v / F_v' = 0.323$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_M \times C_t = 2000000 \text{ lb/in}^2$$

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = 0.806 \text{ in}$$

Total deflection;

$$\delta_{b_s1} = 0.562 \text{ in}$$

$$\delta_{b_s1} / \delta_{adm} = 0.697$$

PASS - Total deflection is less than design deflection


;

B8



STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

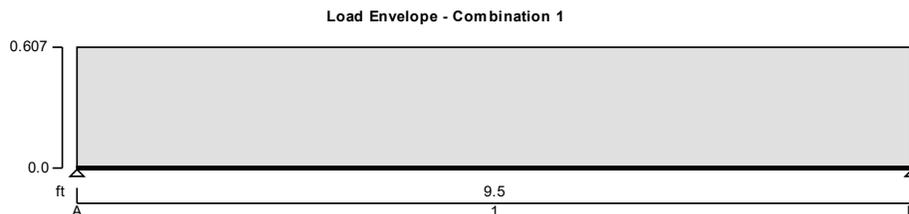

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

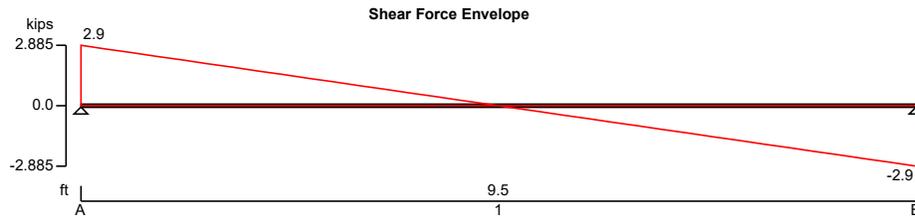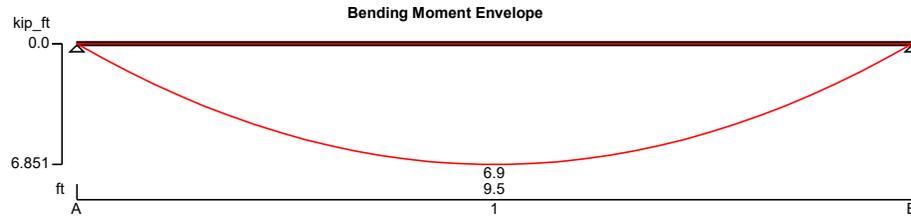

Applied loading

Beam loads

Dead self weight of beam × 1
 Dead full UDL 81 lb/ft
 Live full UDL 270 lb/ft
 Dead full UDL 140 lb/ft
 Snow full UDL 100 lb/ft

Load combinations

Load combination 1

Support A	Dead × 1.00
	Live × 1.00
	Snow × 1.00
Span 1	Dead × 1.00
	Live × 1.00
	Snow × 1.00
Support B	Dead × 1.00
	Live × 1.00
	Snow × 1.00

Analysis results

Maximum moment;

$M_{max} = 6851 \text{ lb_ft};$ $M_{min} = 0 \text{ lb_ft}$

Design moment;

$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 6851 \text{ lb_ft}$

Maximum shear;

$F_{max} = 2885 \text{ lb};$ $F_{min} = -2885 \text{ lb}$

Design shear;

$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 2885 \text{ lb}$

Total load on member;

$W_{tot} = 5770 \text{ lb}$

Reaction at support A;

$R_{A_max} = 2885 \text{ lb};$ $R_{A_min} = 2885 \text{ lb}$

Unfactored dead load reaction at support A;

$R_{A_Dead} = 1127 \text{ lb}$



Unfactored live load reaction at support A;

$R_{A_Live} = 1283 \text{ lb}$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Unfactored snow load reaction at support A;
 Reaction at support B;
 Unfactored dead load reaction at support B;
 Unfactored live load reaction at support B;
 Unfactored snow load reaction at support B;

$R_{A_Snow} = 475 \text{ lb}$
 $R_{B_max} = 2885 \text{ lb};$ $R_{B_min} = 2885 \text{ lb}$
 $R_{B_Dead} = 1127 \text{ lb}$
 $R_{B_Live} = 1283 \text{ lb}$
 $R_{B_Snow} = 475 \text{ lb}$



Sawn lumber section details

Nominal breadth of sections;	$b_{nom} = 6 \text{ in}$
Dressed breadth of sections;	$b = 5.5 \text{ in}$
Nominal depth of sections;	$d_{nom} = 10 \text{ in}$
Dressed depth of sections;	$d = 9.5 \text{ in}$
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 5.5 \text{ in}$
Species, grade and size classification;	Douglas Fir-Larch, No.2 grade, Beams and stringers
Bending parallel to grain;	$F_b = 875 \text{ lb/in}^2$
Tension parallel to grain;	$F_t = 425 \text{ lb/in}^2$
Compression parallel to grain;	$F_c = 600 \text{ lb/in}^2$
Compression perpendicular to grain;	$F_{c_perp} = 625 \text{ lb/in}^2$
Shear parallel to grain;	$F_v = 170 \text{ lb/in}^2$
Modulus of elasticity;	$E = 1300000 \text{ lb/in}^2$
Modulus of elasticity, stability calculations;	$E_{min} = 470000 \text{ lb/in}^2$
Mean shear modulus;	$G_{def} = E / 16 = 81250 \text{ lb/in}^2$

Member details

Service condition;	Dry
Length of span;	$L_{s1} = 9.5 \text{ ft}$
Length of bearing;	$L_b = 4 \text{ in}$
Load duration;	Two months

Section properties

Cross sectional area of member;	$A = N \times b \times d = 52.25 \text{ in}^2$
Section modulus;	$S_x = N \times b \times d^2 / 6 = 82.73 \text{ in}^3$
	$S_y = d \times (N \times b)^2 / 6 = 47.90 \text{ in}^3$
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 392.96 \text{ in}^4$
	$I_y = d \times (N \times b)^3 / 12 = 131.71 \text{ in}^4$

Adjustment factors

Load duration factor - Table 2.3.2;	$C_D = 1.15$
Temperature factor - Table 2.3.3;	$C_t = 1.00$
Size factor for bending - Table 4D;	$C_{Fb} = 1.00$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
	Calc. by	Date	Chk'd by	Date	App'd by	Date
	GL	01-05-2020				
					30	

Size factor for tension - Table 4D; $C_{Ft} = 1.00$

Size factor for compression - Table 4D; $C_{Fc} = 1.00$

Flat use factor - Table 4D; $C_{fu} = 1.00$

Incising factor for modulus of elasticity - Table 4.3.8
 $C_{iE} = 1.00$

Incising factor for bending, shear, tension & compression - Table 4.3.8
 $C_i = 1.00$

Incising factor for perpendicular compression - Table 4.3.8
 $C_{ic_perp} = 1.00$

Repetitive member factor - cl.4.3.9; $C_r = 1.00$

Bearing area factor - cl.3.10.4; $C_b = 1.00$

Depth-to-breadth ratio;
 $d_{nom} / (N \times b_{nom}) = 1.67$

- Beam is fully restrained
Beam stability factor - cl.3.3.3; $C_L = 1.00$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 625 \text{ lb/in}^2$

Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 131 \text{ lb/in}^2$

$$f_{c_perp} / F_{c_perp}' = 0.210$$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress; $F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1006 \text{ lb/in}^2$

Actual bending stress; $f_b = M / S_x = 994 \text{ lb/in}^2$

$$f_b / F_b' = 0.988$$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress; $F_v' = F_v \times C_D \times C_t \times C_i = 196 \text{ lb/in}^2$

Actual shear stress - eq.3.4-2; $f_v = 3 \times F / (2 \times A) = 83 \text{ lb/in}^2$

$$f_v / F_v' = 0.424$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection; $E' = E \times C_{ME} \times C_t \times C_{iE} = 1300000 \text{ lb/in}^2$

Design deflection; $\delta_{adm} = 0.0042 \times L_{s1} = 0.479 \text{ in}$

Total deflection; $\delta_{b_s1} = 0.218 \text{ in}$

$$\delta_{b_s1} / \delta_{adm} = 0.455$$

PASS - Total deflection is less than design deflection


;

B9

STRUCTURAL GLUED LAMINATED TIMBER (GLULAM) BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

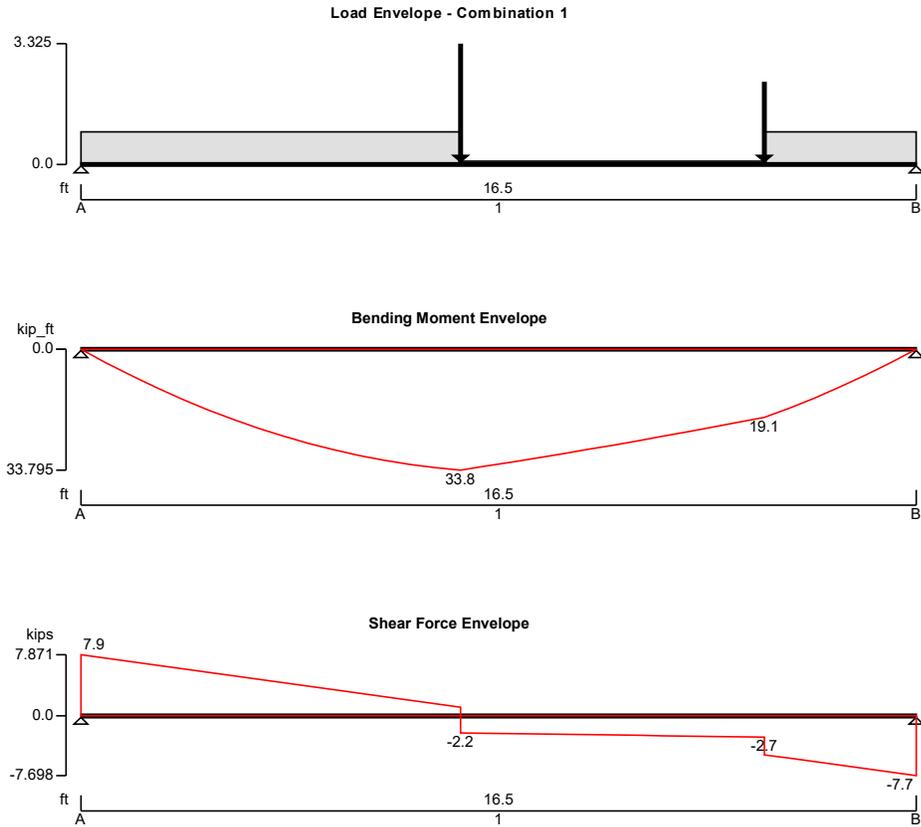

Applied loading

Beam loads

- Dead self weight of beam × 1
- Dead full UDL 16 lb/ft
- Live full UDL 53 lb/ft
- Dead point load 868 lb at 162.00 in
- Snow point load 1409 lb at 162.00 in
- Dead point load 1261 lb at 90.00 in
- Snow point load 2064 lb at 90.00 in
- Dead partial UDL 352 lb/ft from 0.00 in to 90.00 in
- Snow partial UDL 454 lb/ft from 0.00 in to 90.00 in
- Dead partial UDL 352 lb/ft from 162.00 in to 198.00 in
- Snow partial UDL 454 lb/ft from 162.00 in to 198.00 in

Load combinations

Load combination 1

Support A	Dead × 1.00
	Live × 1.00
Span 1	Snow × 1.00
	Dead × 1.00

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				32		



Support B

Live × 1.00
 Snow × 1.00
 Dead × 1.00
 Live × 1.00
 Snow × 1.00

Analysis results

- Maximum moment;
- Design moment;
- Maximum shear;
- Design shear;
- Total load on member;
- Reaction at support A;
- Unfactored dead load reaction at support A;
- Unfactored live load reaction at support A;
- Unfactored snow load reaction at support A;
- Reaction at support B;
- Unfactored dead load reaction at support B;
- Unfactored live load reaction at support B;
- Unfactored snow load reaction at support B;

$M_{max} = 33795 \text{ lb_ft};$ $M_{min} = 0 \text{ lb_ft}$
 $M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 33795 \text{ lb_ft}$
 $F_{max} = 7871 \text{ lb};$ $F_{min} = -7698 \text{ lb}$
 $F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 7871 \text{ lb}$
 $W_{tot} = 15569 \text{ lb}$
 $R_{A_max} = 7871 \text{ lb};$ $R_{A_min} = 7871 \text{ lb}$
 $R_{A_Dead} = 3295 \text{ lb}$
 $R_{A_Live} = 439 \text{ lb}$
 $R_{A_Snow} = 4138 \text{ lb}$
 $R_{B_max} = 7698 \text{ lb};$ $R_{B_min} = 7698 \text{ lb}$
 $R_{B_Dead} = 3156 \text{ lb}$
 $R_{B_Live} = 439 \text{ lb}$
 $R_{B_Snow} = 4104 \text{ lb}$



Glulam section details

- Net finished breadth of sections; $b = 5.125 \text{ in}$
- Net finished depth of sections; $d = 13.5 \text{ in}$
- Number of sections in member; $N = 1$
- Overall breadth of member; $b_b = N \times b = 5.125 \text{ in}$
- Alignment of laminations; **Horizontal**
- Stress class; 24F-V4 DF/DF
- Tension parallel to grain; $F_t = 1100 \text{ lb/in}^2$
- Compression parallel to grain; $F_c = 1650 \text{ lb/in}^2$
- Bending about X-X axis properties (loaded perpendicular to wide faces of laminations):
- Positive bending; $F_{bx_pos} = 2400 \text{ lb/in}^2$
- Negative bending; $F_{bx_neg} = 1850 \text{ lb/in}^2$
- Compression perpendicular to grain; $F_{c_perp} = 650 \text{ lb/in}^2$
- Shear parallel to grain; $F_v = 265 \text{ lb/in}^2$
- Modulus of elasticity; $E = 1800000 \text{ lb/in}^2$
- Modulus of elasticity, stability calculations; $E_{min} = 950000 \text{ lb/in}^2$
- Mean shear modulus; $G_{def} = E / 16 = 112500 \text{ lb/in}^2$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
					33	

Bending about Y-Y axis properties (loaded parallel to wide faces of laminations):

Bending; $F_{by} = 1450 \text{ lb/in}^2$
 Modulus of elasticity; stability calculations; $E_{ymin} = 850000 \text{ lb/in}^2$

Member details

Service condition; **Dry**
 Length of span; $L_{s1} = 16.5 \text{ ft}$
 Length of bearing; $L_b = 4 \text{ in}$
 Load duration; **Two months**

Section properties

Cross sectional area of member; $A = N \times b \times d = 69.19 \text{ in}^2$
 Section modulus; $S_x = N \times b \times d^2 / 6 = 155.67 \text{ in}^3$
 $S_y = d \times (N \times b)^2 / 6 = 59.10 \text{ in}^3$
 Second moment of area; $I_x = N \times b \times d^3 / 12 = 1050.79 \text{ in}^4$
 $I_y = d \times (N \times b)^3 / 12 = 151.44 \text{ in}^4$

Adjustment factors

Load duration factor - Table 2.3.2; $C_D = 1.15$
 Temperature factor - Table 2.3.3; $C_t = 1.00$
 Flat use factor - Table 5A; $C_{fu} = 1.10$
 Bearing area factor - cl.3.10.4; $C_b = 1.00$
 Length of beam between points of zero moment; $L_0 = 16.5 \text{ ft}$
 For species other than Southern Pine; $x = 10$
 Volume factor - eq.5.3-1; $C_V = \min((21 \text{ ft} / L_0)^{1/x} \times (12 \text{ in} / d)^{1/x} \times (5.125 \text{ in} / b)^{1/x}, 1) = 1.00$
 Depth-to-breadth ratio; $d / (N \times b) = 2.63$
 - Beam is fully restrained
 Beam stability factor - cl.3.3.3; $C_L = 1.00$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_b = 650 \text{ lb/in}^2$
 Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 384 \text{ lb/in}^2$
 $f_{c_perp} / F_{c_perp}' = 0.591$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress; $F_b' = F_{bx_pos} \times C_D \times C_t \times \min(C_L, C_V) \times C_c = 2760 \text{ lb/in}^2$
 Actual bending stress; $f_b = M_{max} / S_x = 2605 \text{ lb/in}^2$
 $f_b / F_b' = 0.944$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress; $F_v' = F_v \times C_D \times C_t = 305 \text{ lb/in}^2$
 Actual shear stress - eq.3.4-2; $f_v = 3 \times F / (2 \times A) = 171 \text{ lb/in}^2$
 $f_v / F_v' = 0.560$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection; $E' = E_x \times C_{ME} \times C_t = 1800000 \text{ lb/in}^2$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = \mathbf{0.832 \text{ in}}$$

Total deflection;

$$\delta_{b_{s1}} = \mathbf{0.822 \text{ in}}$$

$$\delta_{b_{s1}} / \delta_{adm} = \mathbf{0.989}$$

PASS - Total deflection is less than design deflection




;

B10

STRUCTURAL COMPOSITE LUMBER BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

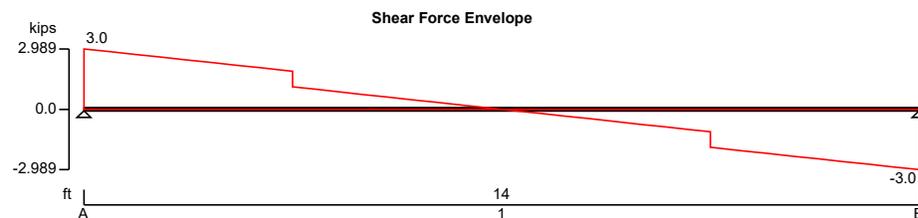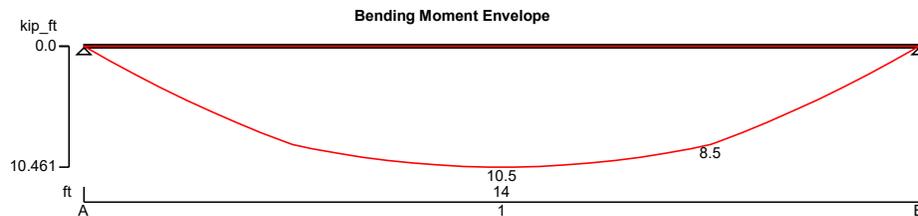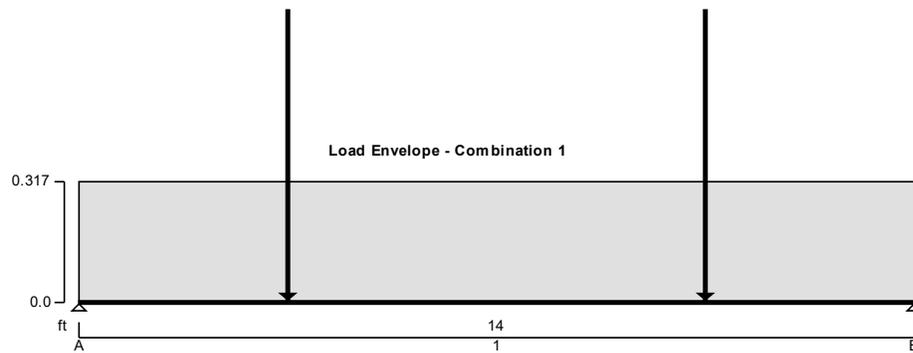

Applied loading

Beam loads

Dead self weight of beam $\times 1$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				35		

Dead full UDL 24 lb/ft
 Live full UDL 80 lb/ft
 Dead full UDL 75 lb/ft
 Snow full UDL 125 lb/ft
 Dead point load 210 lb at 42.00 in
 Snow point load 560 lb at 42.00 in
 Dead point load 210 lb at 126.00 in
 Snow point load 560 lb at 126.00 in

Load combinations



Load combination 1

Support A	Dead × 1.00
	Live × 1.00
	Snow × 1.00
Span 1	Dead × 1.00
	Live × 1.00
	Snow × 1.00
Support B	Dead × 1.00
	Live × 1.00
	Snow × 1.00

Analysis results

Maximum moment;
 Design moment;
 Maximum shear;
 Design shear;
 Total load on member;
 Reaction at support A;
 Unfactored dead load reaction at support A;
 Unfactored live load reaction at support A;
 Unfactored snow load reaction at support A;
 Reaction at support B;
 Unfactored dead load reaction at support B;
 Unfactored live load reaction at support B;
 Unfactored snow load reaction at support B;

$M_{max} = 10461 \text{ lb_ft};$ $M_{min} = 0 \text{ lb_ft}$
 $M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 10461 \text{ lb_ft}$
 $F_{max} = 2989 \text{ lb};$ $F_{min} = -2989 \text{ lb}$
 $F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 2989 \text{ lb}$
 $W_{tot} = 5978 \text{ lb}$
 $R_{A_max} = 2989 \text{ lb};$ $R_{A_min} = 2989 \text{ lb}$
 $R_{A_Dead} = 994 \text{ lb}$
 $R_{A_Live} = 560 \text{ lb}$
 $R_{A_Snow} = 1435 \text{ lb}$
 $R_{B_max} = 2989 \text{ lb};$ $R_{B_min} = 2989 \text{ lb}$
 $R_{B_Dead} = 994 \text{ lb}$
 $R_{B_Live} = 560 \text{ lb}$
 $R_{B_Snow} = 1435 \text{ lb}$



Composite section details

Breadth of composite section; $b = 3.5 \text{ in}$
 Depth of composite section; $d = 11.875 \text{ in}$
 Number of composite sections in member; $N = 1$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				36		

Overall breadth of composite member;	$b_b = N \times b = 3.5$ in
Composite type and grade;	Parallam PSL, 2.0E-2900Fb grade
Bending parallel to grain;	$F_b = 2900$ lb/in ²
Tension parallel to grain;	$F_t = 2025$ lb/in ²
Compression parallel to grain;	$F_c = 2900$ lb/in ²
Compression perpendicular to grain;	$F_{c_perp} = 625$ lb/in ²
Shear parallel to grain;	$F_v = 290$ lb/in ²
Modulus of elasticity;	$E = 2000000$ lb/in ²
Modulus of elasticity, stability calculations;	$E_{min} = 1017000$ lb/in ²
Mean shear modulus;	$G_{def} = E / 16 = 125000$ lb/in ²
Average density;	$\rho = 45$ lb/ft ³

Member details

Service condition;	Dry
Length of span;	$L_{s1} = 14$ ft
Length of bearing;	$L_b = 4$ in
Load duration;	Two months

Section properties

Cross sectional area of member;	$A = N \times b \times d = 41.56$ in ²
Section modulus;	$S_x = N \times b \times d^2 / 6 = 82.26$ in ³
	$S_y = d \times (N \times b)^2 / 6 = 24.24$ in ³
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 488.41$ in ⁴
	$I_y = d \times (N \times b)^3 / 12 = 42.43$ in ⁴

Adjustment factors

Load duration factor - Table 2.3.2;	$C_D = 1.15$
Temperature factor - Table 2.3.3;	$C_t = 1.00$
Size factor for bending;	$C_{Fb} = (12 \text{ in} / \max(d, 3.5 \text{ in}))^{0.111} = 1.00$
Repetitive member factor - cl.8.3.7;	$C_r = 1.00$
Length factor;	$C_{Len} = 1.00$
Bearing area factor - cl.3.10.4;	$C_b = 1.00$
Depth-to-breadth ratio;	$d / (N \times b) = 3.39$
- Beam is fully restrained	
Beam stability factor - cl.3.3.3;	$C_L = 1.00$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain;	$F_{c_perp}' = F_{c_perp} \times C_t \times C_b = 625$ lb/in ²
Applied compression stress perpendicular to grain;	$f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 213$ lb/in ²
	$f_{c_perp} / F_{c_perp}' = 0.342$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;	$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_r = 3339$ lb/in ²
Actual bending stress;	$f_b = M / S_x = 1526$ lb/in ²
	$f_b / F_b' = 0.457$

PASS - Design bending stress exceeds actual bending stress

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				37		

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t = 334 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 108 \text{ lb/in}^2$$

$$f_v / F_v' = 0.323$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_M \times C_t = 2000000 \text{ lb/in}^2$$

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = 0.706 \text{ in}$$

Total deflection;

$$\delta_{b_{s1}} = 0.388 \text{ in}$$

$$\delta_{b_{s1}} / \delta_{adm} = 0.549$$

PASS - Total deflection is less than design deflection


;

B11

STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

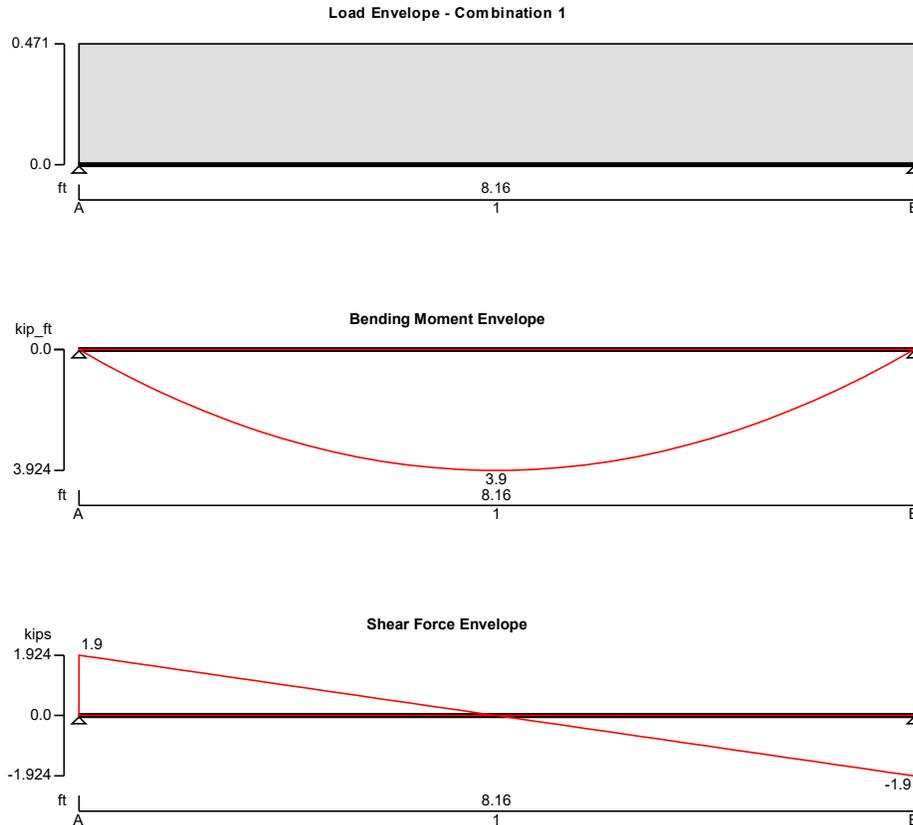

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				38		

Applied loading

Beam loads



Dead self weight of beam $\times 1$
 Dead full UDL 107 lb/ft
 Live full UDL 357 lb/ft

Load combinations

Load combination 1	Support A	Dead $\times 1.00$ Live $\times 1.00$
	Span 1	Dead $\times 1.00$ Live $\times 1.00$
	Support B	Dead $\times 1.00$ Live $\times 1.00$

Analysis results

Maximum moment;	$M_{max} = 3924 \text{ lb_ft};$	$M_{min} = 0 \text{ lb_ft}$
Design moment;	$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 3924 \text{ lb_ft}$	
Maximum shear;	$F_{max} = 1924 \text{ lb};$	$F_{min} = -1924 \text{ lb}$
Design shear;	$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 1924 \text{ lb}$	
Total load on member;	$W_{tot} = 3847 \text{ lb}$	
Reaction at support A;	$R_{A_max} = 1924 \text{ lb};$	$R_{A_min} = 1924 \text{ lb}$
Unfactored dead load reaction at support A;	$R_{A_Dead} = 469 \text{ lb}$	
Unfactored live load reaction at support A;	$R_{A_Live} = 1455 \text{ lb}$	
Reaction at support B;	$R_{B_max} = 1924 \text{ lb};$	$R_{B_min} = 1924 \text{ lb}$
Unfactored dead load reaction at support B;	$R_{B_Dead} = 469 \text{ lb}$	
Unfactored live load reaction at support B;	$R_{B_Live} = 1455 \text{ lb}$	



Sawn lumber section details

Nominal breadth of sections;	$b_{nom} = 4 \text{ in}$
Dressed breadth of sections;	$b = 3.5 \text{ in}$
Nominal depth of sections;	$d_{nom} = 10 \text{ in}$
Dressed depth of sections;	$d = 9.25 \text{ in}$
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 3.5 \text{ in}$
Species, grade and size classification;	Douglas Fir-Larch, No.2 grade, 2" & wider
Bending parallel to grain;	$F_b = 900 \text{ lb/in}^2$
Tension parallel to grain;	$F_t = 575 \text{ lb/in}^2$
Compression parallel to grain;	$F_c = 1350 \text{ lb/in}^2$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Compression perpendicular to grain; $F_{c_perp} = 625 \text{ lb/in}^2$
 Shear parallel to grain; $F_v = 180 \text{ lb/in}^2$
 Modulus of elasticity; $E = 1600000 \text{ lb/in}^2$
 Modulus of elasticity, stability calculations; $E_{min} = 580000 \text{ lb/in}^2$
 Mean shear modulus; $G_{def} = E / 16 = 100000 \text{ lb/in}^2$

Member details

Service condition; **Dry**
 Length of span; $L_{s1} = 8.16 \text{ ft}$
 Length of bearing; $L_b = 4 \text{ in}$
 Load duration; **Two months**

Section properties

Cross sectional area of member; $A = N \times b \times d = 32.38 \text{ in}^2$
 Section modulus; $S_x = N \times b \times d^2 / 6 = 49.91 \text{ in}^3$
 $S_y = d \times (N \times b)^2 / 6 = 18.89 \text{ in}^3$
 Second moment of area; $I_x = N \times b \times d^3 / 12 = 230.84 \text{ in}^4$
 $I_y = d \times (N \times b)^3 / 12 = 33.05 \text{ in}^4$

Adjustment factors

Load duration factor - Table 2.3.2; $C_D = 1.15$
 Temperature factor - Table 2.3.3; $C_t = 1.00$
 Size factor for bending - Table 4A; $C_{Fb} = 1.20$
 Size factor for tension - Table 4A; $C_{Ft} = 1.10$
 Size factor for compression - Table 4A; $C_{Fc} = 1.00$
 Flat use factor - Table 4A; $C_{fu} = 1.10$
 Incising factor for modulus of elasticity - Table 4.3.8
 $C_{iE} = 1.00$
 Incising factor for bending, shear, tension & compression - Table 4.3.8
 $C_i = 1.00$
 Incising factor for perpendicular compression - Table 4.3.8
 $C_{ic_perp} = 1.00$
 Repetitive member factor - cl.4.3.9; $C_r = 1.00$
 Bearing area factor - cl.3.10.4; $C_b = 1.00$
 Depth-to-breadth ratio;
 - Beam is fully restrained
 $d_{nom} / (N \times b_{nom}) = 2.50$
 Beam stability factor - cl.3.3.3; $C_L = 1.00$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 625 \text{ lb/in}^2$
 Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 137 \text{ lb/in}^2$
 $f_{c_perp} / F_{c_perp}' = 0.220$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress; $F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1242 \text{ lb/in}^2$
 Actual bending stress; $f_b = M / S_x = 943 \text{ lb/in}^2$
 $f_b / F_b' = 0.760$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				40		

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t \times C_i = 207 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 89 \text{ lb/in}^2$$

$$f_v / F_v' = 0.431$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_{ME} \times C_t \times C_{IE} = 1600000 \text{ lb/in}^2$$

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = 0.411 \text{ in}$$

Total deflection;

$$\delta_{b_{s1}} = 0.127 \text{ in}$$

$$\delta_{b_{s1}} / \delta_{adm} = 0.310$$

PASS - Total deflection is less than design deflection



;

B12


STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

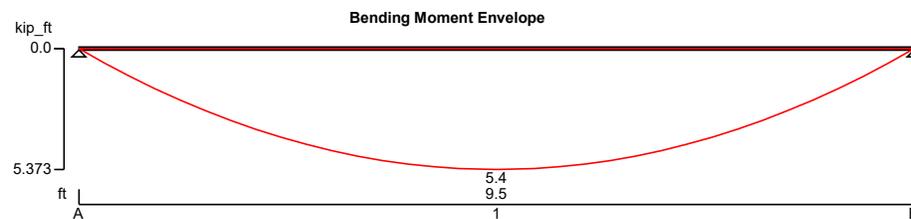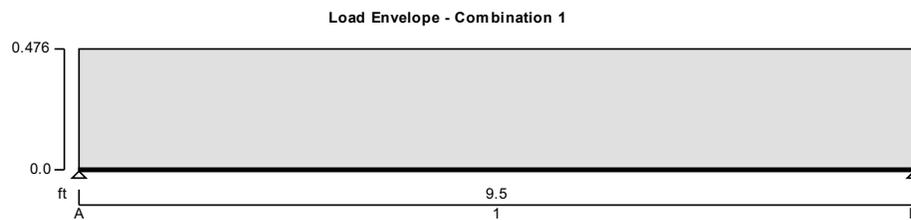

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

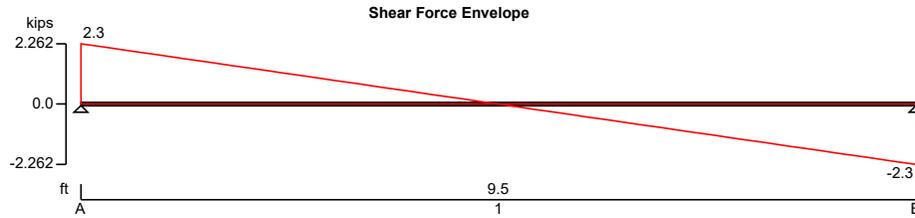

Applied loading

Beam loads

Dead self weight of beam $\times 1$
 Dead full UDL 107 lb/ft
 Live full UDL 357 lb/ft

Load combinations

Load combination 1

Support A	Dead $\times 1.00$
	Live $\times 1.00$
Span 1	Dead $\times 1.00$
	Live $\times 1.00$
Support B	Dead $\times 1.00$
	Live $\times 1.00$

Analysis results

Maximum moment;

$M_{max} = 5373 \text{ lb_ft};$ $M_{min} = 0 \text{ lb_ft}$

Design moment;

$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 5373 \text{ lb_ft}$

Maximum shear;

$F_{max} = 2262 \text{ lb};$ $F_{min} = -2262 \text{ lb}$

Design shear;

$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 2262 \text{ lb}$

Total load on member;

$W_{tot} = 4525 \text{ lb}$

Reaction at support A;

$R_{A_max} = 2262 \text{ lb};$ $R_{A_min} = 2262 \text{ lb}$

Unfactored dead load reaction at support A;

$R_{A_Dead} = 568 \text{ lb}$

Unfactored live load reaction at support A;

$R_{A_Live} = 1694 \text{ lb}$

Reaction at support B;



$R_{B_max} = 2262 \text{ lb};$ $R_{B_min} = 2262 \text{ lb}$

Unfactored dead load reaction at support B;

$R_{B_Dead} = 568 \text{ lb}$

Unfactored live load reaction at support B;

$R_{B_Live} = 1694 \text{ lb}$



Sawn lumber section details

Nominal breadth of sections;

$b_{nom} = 6 \text{ in}$

Dressed breadth of sections;

$b = 5.5 \text{ in}$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
Section				42		

Nominal depth of sections;	$d_{nom} = 10$ in
Dressed depth of sections;	$d = 9.5$ in
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 5.5$ in
Species, grade and size classification;	Douglas Fir-Larch, No.2 grade, Beams and stringers
Bending parallel to grain;	$F_b = 875$ lb/in ²
Tension parallel to grain;	$F_t = 425$ lb/in ²
Compression parallel to grain;	$F_c = 600$ lb/in ²
Compression perpendicular to grain;	$F_{c_perp} = 625$ lb/in ²
Shear parallel to grain;	$F_v = 170$ lb/in ²
Modulus of elasticity;	$E = 1300000$ lb/in ²
Modulus of elasticity, stability calculations;	$E_{min} = 470000$ lb/in ²
Mean shear modulus;	$G_{def} = E / 16 = 81250$ lb/in ²

Member details

Service condition;	Dry
Length of span;	$L_{s1} = 9.5$ ft
Length of bearing;	$L_b = 4$ in
Load duration;	Two months

Section properties

Cross sectional area of member;	$A = N \times b \times d = 52.25$ in ²
Section modulus;	$S_x = N \times b \times d^2 / 6 = 82.73$ in ³
	$S_y = d \times (N \times b)^2 / 6 = 47.90$ in ³
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 392.96$ in ⁴
	$I_y = d \times (N \times b)^3 / 12 = 131.71$ in ⁴

Adjustment factors

Load duration factor - Table 2.3.2;	$C_D = 1.15$
Temperature factor - Table 2.3.3;	$C_t = 1.00$
Size factor for bending - Table 4D;	$C_{Fb} = 1.00$
Size factor for tension - Table 4D;	$C_{Ft} = 1.00$
Size factor for compression - Table 4D;	$C_{Fc} = 1.00$
Flat use factor - Table 4D;	$C_{fu} = 1.00$
Incising factor for modulus of elasticity - Table 4.3.8	$C_{iE} = 1.00$
Incising factor for bending, shear, tension & compression - Table 4.3.8	$C_i = 1.00$
Incising factor for perpendicular compression - Table 4.3.8	$C_{ic_perp} = 1.00$
Repetitive member factor - cl.4.3.9;	$C_r = 1.00$
Bearing area factor - cl.3.10.4;	$C_b = 1.00$
Depth-to-breadth ratio;	$d_{nom} / (N \times b_{nom}) = 1.67$
- Beam is fully restrained	
Beam stability factor - cl.3.3.3;	$C_L = 1.00$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				43		

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 625 \text{ lb/in}^2$

Applied compression stress perpendicular to grain; $f_{c_perp} = R_{B_max} / (N \times b \times L_b) = 103 \text{ lb/in}^2$

$f_{c_perp} / F_{c_perp}' = 0.165$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;

$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1006 \text{ lb/in}^2$

Actual bending stress;

$f_b = M / S_x = 779 \text{ lb/in}^2$

$f_b / F_b' = 0.775$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$F_v' = F_v \times C_D \times C_t \times C_i = 196 \text{ lb/in}^2$

Actual shear stress - eq.3.4-2;

$f_v = 3 \times F / (2 \times A) = 65 \text{ lb/in}^2$

$f_v / F_v' = 0.332$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$E' = E \times C_{ME} \times C_t \times C_{IE} = 1300000 \text{ lb/in}^2$

Design deflection;

$\delta_{adm} = 0.0042 \times L_{s1} = 0.479 \text{ in}$

Total deflection;

$\delta_{b_s1} = 0.171 \text{ in}$

$\delta_{b_s1} / \delta_{adm} = 0.357$

PASS - Total deflection is less than design deflection


;

B13- TYPICAL 2X FLOOR JOIST



STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

TEDDS calculation version 1.7.03

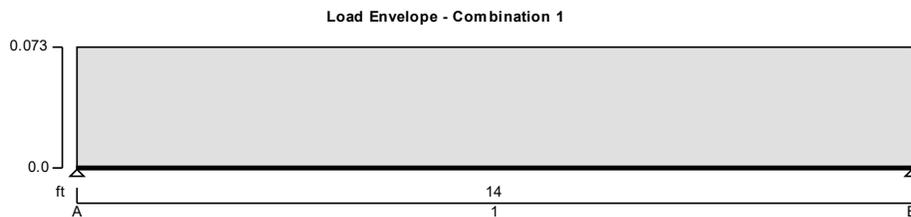

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				44		

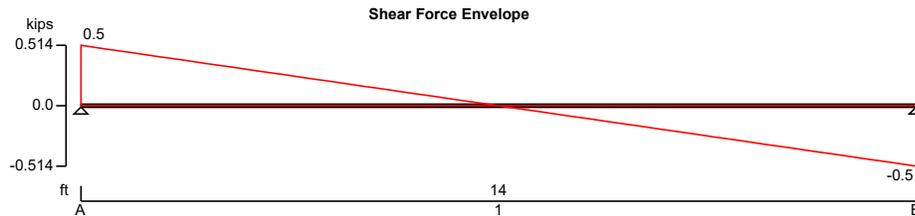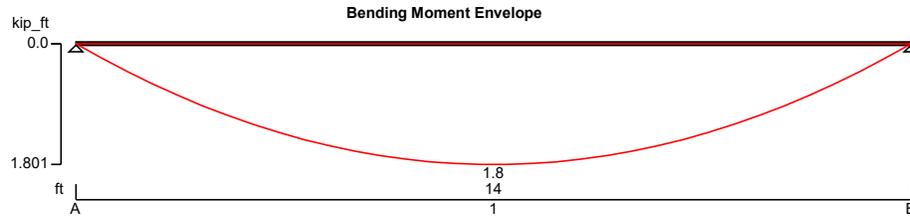

Applied loading

Beam loads

Dead self weight of beam \times 1
 Dead full UDL 16 lb/ft
 Live full UDL 53 lb/ft

Load combinations

Load combination 1

Support A	Dead \times 1.00
	Live \times 1.00
	Snow \times 1.00
Span 1	Dead \times 1.00
	Live \times 1.00
	Snow \times 1.00
Support B	Dead \times 1.00
	Live \times 1.00
	Snow \times 1.00

Analysis results

Maximum moment;

$M_{max} = 1801$ lb_{ft}; $M_{min} = 0$ lb_{ft}

Design moment;

$M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 1801$ lb_{ft}

Maximum shear;

$F_{max} = 514$ lb; $F_{min} = -514$ lb

Design shear;

$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 514$ lb

Total load on member;

$W_{tot} = 1029$ lb

Reaction at support A;

$R_{A,max} = 514$ lb; $R_{A,min} = 514$ lb

Unfactored dead load reaction at support A;

$R_{A,Dead} = 142$ lb

Unfactored live load reaction at support A;

$R_{A,Live} = 372$ lb

Reaction at support B;

$R_{B,max} = 514$ lb; $R_{B,min} = 514$ lb


Unfactored dead load reaction at support B;

$R_{B,Dead} = 142$ lb

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Unfactored live load reaction at support B;

$R_{B_Live} = 372 \text{ lb}$



Sawn lumber section details

Nominal breadth of sections;	$b_{nom} = 2 \text{ in}$
Dressed breadth of sections;	$b = 1.5 \text{ in}$
Nominal depth of sections;	$d_{nom} = 10 \text{ in}$
Dressed depth of sections;	$d = 9.25 \text{ in}$
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 1.5 \text{ in}$
Species, grade and size classification;	Hem-Fir, No.2 grade, 2" & wider
Bending parallel to grain;	$F_b = 850 \text{ lb/in}^2$
Tension parallel to grain;	$F_t = 525 \text{ lb/in}^2$
Compression parallel to grain;	$F_c = 1300 \text{ lb/in}^2$
Compression perpendicular to grain;	$F_{c_perp} = 405 \text{ lb/in}^2$
Shear parallel to grain;	$F_v = 150 \text{ lb/in}^2$
Modulus of elasticity;	$E = 1300000 \text{ lb/in}^2$
Modulus of elasticity, stability calculations;	$E_{min} = 470000 \text{ lb/in}^2$
Mean shear modulus;	$G_{def} = E / 16 = 81250 \text{ lb/in}^2$

Member details

Service condition;	Dry
Length of span;	$L_{st} = 14 \text{ ft}$
Length of bearing;	$L_b = 4 \text{ in}$
Load duration;	Two months
The beam is one of three or more repetitive members	

Section properties

Cross sectional area of member;	$A = N \times b \times d = 13.87 \text{ in}^2$
Section modulus;	$S_x = N \times b \times d^2 / 6 = 21.39 \text{ in}^3$
	$S_y = d \times (N \times b)^2 / 6 = 3.47 \text{ in}^3$
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 98.93 \text{ in}^4$
	$I_y = d \times (N \times b)^3 / 12 = 2.60 \text{ in}^4$

Adjustment factors

Load duration factor - Table 2.3.2;	$C_D = 1.15$
Temperature factor - Table 2.3.3;	$C_t = 1.00$
Size factor for bending - Table 4A;	$C_{Fb} = 1.10$
Size factor for tension - Table 4A;	$C_{Ft} = 1.10$
Size factor for compression - Table 4A;	$C_{Fc} = 1.00$
Flat use factor - Table 4A;	$C_{fu} = 1.20$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				46		

Incising factor for modulus of elasticity - Table 4.3.8

$$C_{IE} = 1.00$$

Incising factor for bending, shear, tension & compression - Table 4.3.8

$$C_i = 1.00$$

Incising factor for perpendicular compression - Table 4.3.8

$$C_{ic_perp} = 1.00$$

Repetitive member factor - cl.4.3.9;

$$C_r = 1.15$$

Bearing area factor - cl.3.10.4;

$$C_b = 1.00$$

Depth-to-breadth ratio;

$$d_{nom} / (N \times b_{nom}) = 5.00$$

- Beam is fully restrained

Beam stability factor - cl.3.3.3;

$$C_L = 1.00$$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain;

$$F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 405 \text{ lb/in}^2$$

Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 86 \text{ lb/in}^2$

$$f_{c_perp} / F_{c_perp}' = 0.212$$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;

$$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1237 \text{ lb/in}^2$$

Actual bending stress;

$$f_b = M / S_x = 1010 \text{ lb/in}^2$$

$$f_b / F_b' = 0.817$$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t \times C_i = 173 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 56 \text{ lb/in}^2$$

$$f_v / F_v' = 0.322$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_{ME} \times C_t \times C_{IE} = 1300000 \text{ lb/in}^2$$

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = 0.706 \text{ in}$$

Total deflection;

$$\delta_{b_s1} = 0.494 \text{ in}$$

$$\delta_{b_s1} / \delta_{adm} = 0.700$$

PASS - Total deflection is less than design deflection


;

B14 – TYPICAL FIRST FLOOR WOOD BEAM

STRUCTURAL WOOD BEAM ANALYSIS & DESIGN (NDS)

In accordance with the ANSI/AF&PA NDS-2015 using the ASD method

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

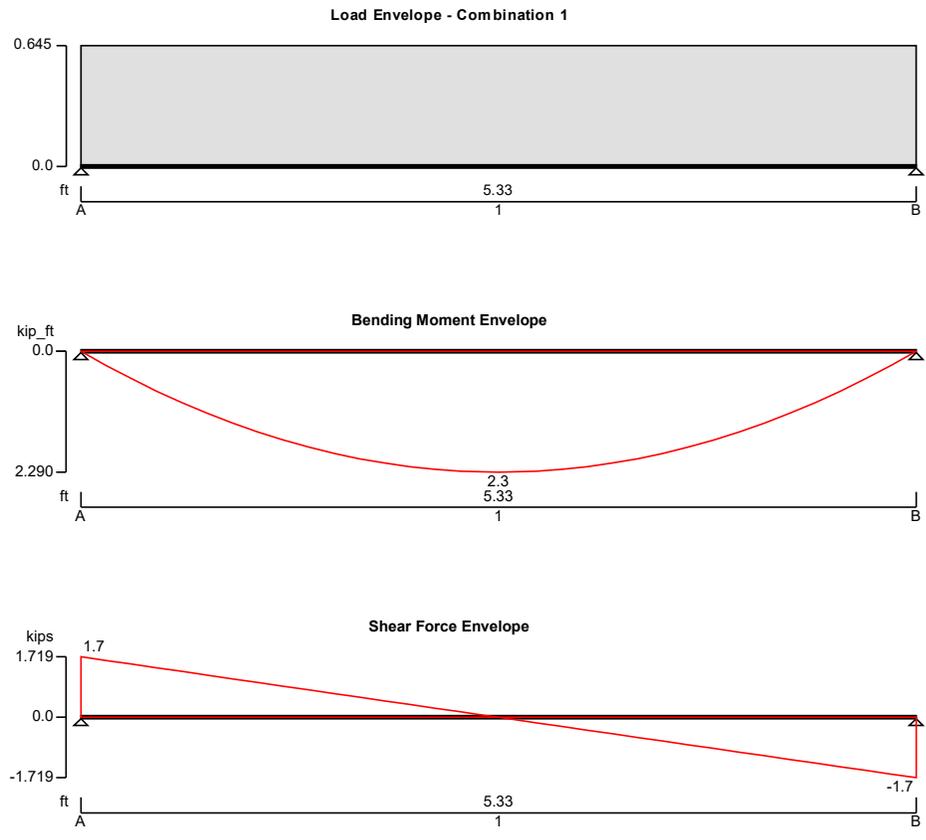

Applied loading

Beam loads

Dead self weight of beam × 1
 Dead full UDL 147 lb/ft
 Live full UDL 490 lb/ft

Load combinations

Load combination 1

Support A	Dead × 1.00 Live × 1.00 Snow × 1.00
Span 1	Dead × 1.00 Live × 1.00 Snow × 1.00
Support B	Dead × 1.00 Live × 1.00 Snow × 1.00



Analysis results

Maximum moment;
 Design moment;

$M_{max} = 2290 \text{ lb_ft};$ $M_{min} = 0 \text{ lb_ft}$
 $M = \max(\text{abs}(M_{max}), \text{abs}(M_{min})) = 2290 \text{ lb_ft}$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Maximum shear;	$F_{max} = 1719$ lb;	$F_{min} = -1719$ lb
Design shear;	$F = \max(\text{abs}(F_{max}), \text{abs}(F_{min})) = 1719$ lb	
Total load on member;	$W_{tot} = 3437$ lb	
Reaction at support A;	$R_{A_max} = 1719$ lb;	$R_{A_min} = 1719$ lb
Unfactored dead load reaction at support A;	$R_{A_Dead} = 413$ lb	
Unfactored live load reaction at support A;	$R_{A_Live} = 1306$ lb	
Reaction at support B;	$R_{B_max} = 1719$ lb;	$R_{B_min} = 1719$ lb
Unfactored dead load reaction at support B;	$R_{B_Dead} = 413$ lb	
Unfactored live load reaction at support B;	$R_{B_Live} = 1306$ lb	

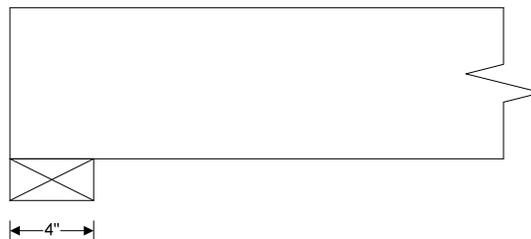

Sawn lumber section details

Nominal breadth of sections;	$b_{nom} = 4$ in
Dressed breadth of sections;	$b = 3.5$ in
Nominal depth of sections;	$d_{nom} = 8$ in
Dressed depth of sections;	$d = 7.25$ in
Number of sections in member;	$N = 1$
Overall breadth of member;	$b_b = N \times b = 3.5$ in
Species, grade and size classification;	Hem-Fir, No.2 grade, 2" & wider
Bending parallel to grain;	$F_b = 850$ lb/in ²
Tension parallel to grain;	$F_t = 525$ lb/in ²
Compression parallel to grain;	$F_c = 1300$ lb/in ²
Compression perpendicular to grain;	$F_{c_perp} = 405$ lb/in ²
Shear parallel to grain;	$F_v = 150$ lb/in ²
Modulus of elasticity;	$E = 1300000$ lb/in ²
Modulus of elasticity, stability calculations;	$E_{min} = 470000$ lb/in ²
Mean shear modulus;	$G_{def} = E / 16 = 81250$ lb/in ²

Member details

Service condition;	Dry
Length of span;	$L_{s1} = 5.33$ ft
Length of bearing;	$L_b = 4$ in
Load duration;	Two months

Section properties

Cross sectional area of member;	$A = N \times b \times d = 25.37$ in ²
Section modulus;	$S_x = N \times b \times d^2 / 6 = 30.66$ in ³
	$S_y = d \times (N \times b)^2 / 6 = 14.80$ in ³
Second moment of area;	$I_x = N \times b \times d^3 / 12 = 111.15$ in ⁴
	$I_y = d \times (N \times b)^3 / 12 = 25.90$ in ⁴

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Adjustment factors

Load duration factor - Table 2.3.2; $C_D = 1.15$

Temperature factor - Table 2.3.3; $C_t = 1.00$

Size factor for bending - Table 4A; $C_{Fb} = 1.30$

Size factor for tension - Table 4A; $C_{Ft} = 1.20$

Size factor for compression - Table 4A; $C_{Fc} = 1.05$

Flat use factor - Table 4A; $C_{fu} = 1.05$

Incising factor for modulus of elasticity - Table 4.3.8

$$C_{IE} = 1.00$$

Incising factor for bending, shear, tension & compression - Table 4.3.8

$$C_i = 1.00$$

Incising factor for perpendicular compression - Table 4.3.8

$$C_{ic_perp} = 1.00$$

Repetitive member factor - cl.4.3.9;

$$C_r = 1.00$$

Bearing area factor - cl.3.10.4;

$$C_b = 1.00$$

Depth-to-breadth ratio;

$$d_{nom} / (N \times b_{nom}) = 2.00$$

- Beam is fully restrained

Beam stability factor - cl.3.3.3;

$$C_L = 1.00$$

Bearing perpendicular to grain - cl.3.10.2

Design compression perpendicular to grain; $F_{c_perp}' = F_{c_perp} \times C_t \times C_i \times C_b = 405 \text{ lb/in}^2$

Applied compression stress perpendicular to grain; $f_{c_perp} = R_{A_max} / (N \times b \times L_b) = 123 \text{ lb/in}^2$

$$f_{c_perp} / F_{c_perp}' = 0.303$$

PASS - Design compressive stress exceeds applied compressive stress at bearing

Strength in bending - cl.3.3.1

Design bending stress;

$$F_b' = F_b \times C_D \times C_t \times C_L \times C_{Fb} \times C_i \times C_r = 1271 \text{ lb/in}^2$$

Actual bending stress;

$$f_b = M / S_x = 896 \text{ lb/in}^2$$

$$f_b / F_b' = 0.705$$

PASS - Design bending stress exceeds actual bending stress

Strength in shear parallel to grain - cl.3.4.1

Design shear stress;

$$F_v' = F_v \times C_D \times C_t \times C_i = 173 \text{ lb/in}^2$$

Actual shear stress - eq.3.4-2;

$$f_v = 3 \times F / (2 \times A) = 102 \text{ lb/in}^2$$

$$f_v / F_v' = 0.589$$

PASS - Design shear stress exceeds actual shear stress

Deflection - cl.3.5.1

Modulus of elasticity for deflection;

$$E' = E \times C_{ME} \times C_t \times C_{IE} = 1300000 \text{ lb/in}^2$$

Design deflection;

$$\delta_{adm} = 0.0042 \times L_{s1} = 0.269 \text{ in}$$

Total deflection;

$$\delta_{b_s1} = 0.081 \text{ in}$$

$$\delta_{b_s1} / \delta_{adm} = 0.302$$

PASS - Total deflection is less than design deflection


;

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project			Job Ref.	
	Sun Residence Mercer Island			1956	
	Section			Sheet no./rev.	
	Calc. by	Date	Chk'd by	Date	App'd by
	GL	01-05-2020			50

WOOD CONNECTION (NDS)

BOLTED TIMBER TO TIMBER CONNECTION DESIGN (NDS 2015)

Tedds calculation version 1.2.00 -

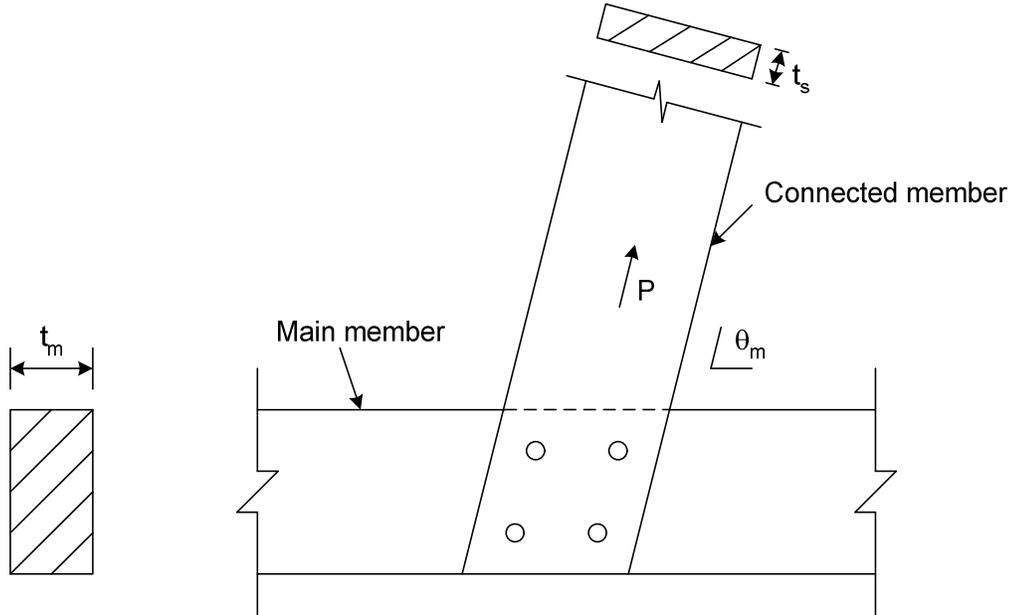

Main timber member details

Species of main member;
 Size of main member (Table 1B);
 Number of main member;
 Thickness of main member;
 Angle of load to grain of main member;

Douglas Fir-Larch

6 x 10 ;
 $N_m = 1$
 $t_m = 5.500$ in
 $\theta_m = 55^\circ$

Connected timber member details

Species of connected member;
 Size of connected member (Table 1B);
 Number of connected member;
 Thickness of connected member;
 Number of interfaces;

Hem-Fir

2 x 8
 $N_s = 2$
 $t_s = 1.500$ in
 $N_{int} = (N_m + N_s) - 1 = 2$

Bolt details

Bolt diameter (Table L1);
 Number of rows of bolts;
 Number of columns of bolts;
 Total number of bolts;

3/4"
 $R = 2$
 $C = 1$
 $N_{total} = R \times C = 2$

Applied load

Applied load to the connection;

$P = 1600$ lb

Dowel bearing length (main) (12.3.5)

Dowel bearing length in main member;

$l_m = t_m = 5.500$ in

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
	Calc. by	Date	Chk'd by	Date	App'd by	Date
	GL	01-05-2020				
					51	

Dowel bearing length (connected) (12.3.5)

Dowel bearing length in connected member; $l_s = t_s = 1.500$ in

Bending yield strength (bolt) (Table 12A to 12I footnote no. 2)

Bending yield strength of bolt; $F_{yb} = 45000$ psi

Dowel bearing strength (main member) (Table 12.3.3 footnote no. 2)

Dowel bearing strength parallel to grain; $F_{e_par} = 11200 \times G_m \times 1$ psi = **5600** psi

Dowel bearing strength perpendicular to grain; $F_{e_perp} = 6100 \times G_m^{1.45} \times 1$ psi / $\sqrt{(D / 1 \text{ in})} = 2578$ psi

Dowel bearing strength for small dia. fasteners; $F_e = 16600 \times G_m^{1.84} \times 1$ psi = **4637** psi

Dowel bearing strength at an angle of load to grain; $F_{e\theta m} = (F_{e_par} \times F_{e_perp}) / ((F_{e_par} \times (\sin(\theta_m))^2) + (F_{e_perp} \times (\cos(\theta_m))^2))$
 $F_{e\theta m} = 3135$ psi

Dowel bearing strength of main member; $F_{em} = 3135$ psi

Dowel bearing strength (connected timber member) (Table 12.3.3 footnote no. 2)

Dowel bearing strength parallel to grain; $F_{e_par} = 11200 \times G_s \times 1$ psi = **4816** psi

Dowel bearing strength perpendicular to grain; $F_{e_perp} = 6100 \times G_s^{1.45} \times 1$ psi / $\sqrt{(D / 1 \text{ in})} = 2072$ psi

Dowel bearing strength for small dia. fasteners; $F_e = 16600 \times G_s^{1.84} \times 1$ psi = **3513** psi

Dowel bearing strength at an angle of load to grain; $F_{e\theta s} = (F_{e_par} \times F_{e_perp}) / ((F_{e_par} \times (\sin(\theta_s))^2) + (F_{e_perp} \times (\cos(\theta_s))^2))$
 $F_{e\theta s} = 4816$ psi

Dowel bearing strength of connected member; $F_{es} = 4816$ psi

Preliminary yield limit equation coefficients (Table 12.3.1A notes)

Dowel bearing strength ratio; $R_e = F_{em} / F_{es} = 0.651$

Dowel bearing length ratio; $R_t = l_m / l_s = 3.667$

Preliminary yield limit equation coefficient k_1 ; $k_1 = ((\sqrt{(R_e + (2 \times R_e^2 \times (1 + R_t + R_t^2)) + (R_t^2 \times R_e^3))}) - (R_e \times (1 + R_t))) / (1 + R_e)$
 $k_1 = 0.849$

Preliminary yield limit equation coefficient k_2 ; $k_2 = -1 + \sqrt{((2 \times (1 + R_e)) + ((2 \times F_{yb} \times (1 + (2 \times R_e)) \times D^2)) / (3 \times F_{em} \times l_m^2))}$
 $k_2 = 0.926$

Preliminary yield limit equation coefficient k_3 ; $k_3 = -1 + \sqrt{((2 \times (1 + R_e)) / R_e) + ((2 \times F_{yb} \times (2 + R_e) \times D^2)) / (3 \times F_{em} \times l_s^2)}$
 $k_3 = 2.379$

Angle of load to grain coefficient k_θ ; $k_\theta = 1 + (0.25 \times \max(\theta_m, \theta_s) / 90) = 1.153$

Yield limit equations (double shear)

Mode l_m (eq. 12.3-7); $Z_{lm} = (D \times l_m \times F_{em}) / (4 \times k_\theta) = 2804$ lb

Mode l_s (eq. 12.3-8); $Z_{ls} = (2 \times D \times l_s \times F_{es}) / (4 \times k_\theta) = 2350$ lb

Mode III_s (eq. 12.3-9); $Z_{III_s} = (2 \times k_3 \times D \times l_s \times F_{em}) / ((2 + R_e) \times 3.2 \times k_\theta) = 1716$ lb

Mode IV (eq. 12.3-10); $Z_{IV} = (2 \times D^2) \times (\sqrt{((2 \times F_{em} \times F_{yb}) / (3 \times (1 + R_e))))} / (3.2 \times k_\theta) = 2302$ lb

$Z = \min(Z_{lm}, Z_{ls}, Z_{III_s}, Z_{IV}) = 1716$ lb

Nominal capacity of single fastener; $Z = 1716$ lb

Slenderness (Table 12.5.1C footnote no.1)

Slenderness; $l / D = 4.000$

Spacing requirements (perpendicular to grain loading)

Edge distance (Table 12.5.1C)

Loaded edge; $e_q = 4 \times D = 3.000$ in

Unloaded edge; $e_p = 1.5 \times D = 1.125$ in

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

End distance (Table 12.5.1A)

End distance (full strength); $a_{q_full} = 4 \times D = 3.000$ in
 End distance (minimum); $a_{q_min} = 2 \times D = 1.500$ in
 End distance (actual); $a_q = 1.500$ in

Center to center spacing (Table 12.5.1B)

Center to center spacing (full strength); $s_{full} = 4 \times D = 3.000$ in
 Center to center spacing (minimum); $s_{min} = 3 \times D = 2.250$ in
 Center to center spacing (actual); $s = 3.000$ in

Row spacing (Table 12.5.1D)

Row spacing; $s_{row} = ((5 \times l) + (10 \times D)) / 8 = 2.812$ in

Geometry factor C_{Δ} (12.5.1)

End distance (actual); $a_q = 1.500$ in
 End distance (full strength); $a_{q_full} = 3.000$ in
 Geometry factor for end distance; $C_{\Delta 1} = a_q / a_{q_full} = 0.50$
 Center to center spacing (actual); $s = 3.000$ in
 Center to center spacing (full strength); $s_{full} = 3.000$ in
 Geometry factor for spacing; $C_{\Delta 2} = s / s_{full} = 1.00$
 Geometry factor; $C_{\Delta} = \min(1, C_{\Delta 1}, C_{\Delta 2}) = 0.50$

Adjustment factor

Load duration factor (Table 2.3.2); $C_D = 1.15$
 Wet service factor (Table 11.3.3); $C_M = 1.0$
 Temperature factor (Table 11.3.4); $C_t = 1.0$
 Group action factor (eq. 11.3-1); $C_g = 1.0$
 Geometry factor (12.5.1); $C_{\Delta} = 0.50$
 End grain factor (12.5.2); $C_{eg} = 1.0$
 Diaphragm factor (12.5.3); $C_{di} = 1.0$
 Toe nail factor (12.5.4); $C_{tn} = 1.0$

Total capacity of connection

Capacity of connection; $Z' = Z \times N_{total} \times C_D \times C_M \times C_{\Delta} = 1973$ lb

Design result

PASS - Connection capacity exceeds applied load

;

SEISMIC FORCES (ASCE7)

SEISMIC FORCES (ASCE 7-10)

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				53		

Site parameters

Site class; D
 Mapped acceleration parameters
 at short periods; $S_s = 1.376$; at 1 sec period; $S_1 = 0.53$
 Site coefficient at short periods; $F_a = 1.0$; at 1 sec period; $F_v = 1.5$

Spectral response acceleration parameters

at short period ; $S_{MS} = 1.376$; at 1 sec period ; $S_{M1} = 0.795$

Design spectral acceleration parameters

at short period; $S_{DS} = 0.917$; at 1 sec period; $S_{D1} = 0.530$

Seismic design category

Risk category; II;
 Seismic design category; D

Approximate fundamental period

Height above base to highest level of building; $h_n = 21.00$ ft
 Building period parameter C_t ; $C_t = 0.02$; Building period parameter x ; $x = 0.75$
 Building fundamental period; $T = T_a = 0.196$ sec; Long-period transition period; $T_L = 6$ sec

Seismic response coefficient

Seismic force resisting system: A. Bearing_Wall_Systems
 15. Light-frame (wood) walls sheathed with wood structural panels
 Response modification factor; $R = 6.5$;
 Seismic importance factor; $I_e = 1.000$; Seismic response coefficient; $C_s = 0.141$

Seismic base shear

Effective seismic weight of the structure; $W = 85.6$ kips
 Seismic response coefficient; $C_s = 0.141$; Seismic base shear; $V = 12.09$ kips

Vertical force distribution table

Level	Height from base to Level i (ft), h_x	Portion of effective seismic weight assigned to Level i (kips), w_x	Distribution exponent related to building period, k	Vertical distribution factor, C_{vx}	Lateral force induced at Level i (kips), F_x
1	12.0;	44.9;	1.00;	0.386;	4.7;
2	21.0;	40.8;	1.00;	0.614;	7.4;


WIND LOADING (ASCE7-10)

WIND LOADING (ASCE7-10)

In accordance with ASCE7-10 incorporating Errata No. 1 and Errata No. 2

Using the directional design method

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				
				54		

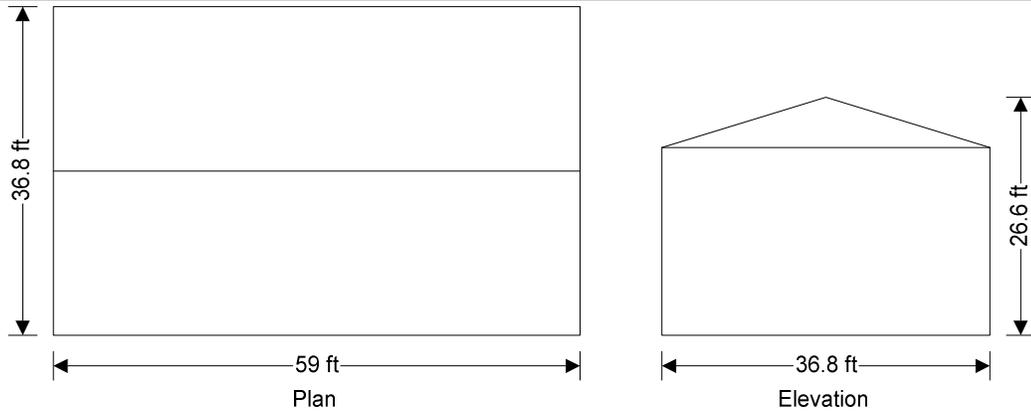

Building data

Type of roof; Gable
 Length of building; b = **59.00** ft
 Width of building; d = **36.75** ft
 Height to eaves; H = **21.00** ft
 Pitch of roof; $\alpha_0 = 17.0$ deg
 Mean height; h = **23.81** ft

General wind load requirements

Basic wind speed; V = **110.0** mph
 Risk category; II
 Velocity pressure exponent coeff (Table 26.6-1); $K_d = 0.85$
 Exposure category (cl.26.7.3); C
 Enclosure classification (cl.26.10); Enclosed buildings
 Internal pressure coef +ve (Table 26.11-1); $GC_{pi_p} = 0.18$
 Internal pressure coef -ve (Table 26.11-1); $GC_{pi_n} = -0.18$
 Gust effect factor; $G_f = 0.85$

Topography

Topography factor not significant; $K_{zt} = 1.0$
 Velocity pressure equation; $q = 0.00256 \times K_z \times K_{zt} \times K_d \times V^2 \times 1\text{psf}/\text{mph}^2$;

Velocity pressures table

z (ft)	K_z (Table 27.3-1)	q_z (psf)
15.00	0.85	22.38
15.00	0.85	22.38
20.00	0.90	23.70
21.00	0.91	23.91
23.81	0.93	24.50
26.62	0.95	25.09

Peak velocity pressure for internal pressure

Peak velocity pressure – internal (as roof press.); $q_i = 24.50$ psf

Pressures and forces

Net pressure; $p = q \times G_f \times C_{pe} - q_i \times GC_{pi}$;

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Net force; $F_w = p \times A_{ref}$

Roof load case 1 - Wind 0, GC_{pi} 0.18, -C_{pe}

Zone	Ref. height (ft)	Ext pressure coefficient C _{pe}	Peak velocity pressure q _p (psf)	Net pressure p (psf)	Area A _{ref} (ft ²)	Net force F _w (kips)
A (-ve)	23.81	-0.67	24.50	-18.34	1133.66	-20.79
B (-ve)	23.81	-0.56	24.50	-16.02	1133.66	-18.17

Total vertical net force; $F_{w,v} = -37.25$ kips

Total horizontal net force; $F_{w,h} = -0.77$ kips

Walls load case 1 - Wind 0, GC_{pi} 0.18, -C_{pe}

Zone	Ref. height (ft)	Ext pressure coefficient C _{pe}	Peak velocity pressure q _p (psf)	Net pressure p (psf)	Area A _{ref} (ft ²)	Net force F _w (kips)
A ₁	15.00	0.80	22.38	10.81	885.00	9.57
A ₂	15.00	0.80	22.38	10.81	0.00	0.00
A ₃	21.00	0.80	23.91	11.85	354.00	4.19
B	23.81	-0.50	24.50	-14.82	1239.00	-18.36
C	23.81	-0.70	24.50	-18.99	874.98	-16.61
D	23.81	-0.70	24.50	-18.99	874.98	-16.61

Overall loading

Projected vertical plan area of wall; $A_{vert_w_0} = b \times H = 1239.00$ ft²

Projected vertical area of roof; $A_{vert_r_0} = b \times d/2 \times \tan(\alpha_0) = 331.45$ ft²

Minimum overall horizontal loading; $F_{w,total_min} = p_{min_w} \times A_{vert_w_0} + p_{min_r} \times A_{vert_r_0} = 22.48$ kips

Leeward net force; $F_l = F_{w,wB} = -18.4$ kips

Windward net force; $F_w = F_{w,wA_1} + F_{w,wA_2} + F_{w,wA_3} = 13.8$ kips

Overall horizontal loading; $F_{w,total} = \max(F_w - F_l + F_{w,h}, F_{w,total_min}) = 31.4$ kips

Roof load case 2 - Wind 0, GC_{pi} -0.18, -0C_{pe}

Zone	Ref. height (ft)	Ext pressure coefficient C _{pe}	Peak velocity pressure q _p (psf)	Net pressure p (psf)	Area A _{ref} (ft ²)	Net force F _w (kips)
A (+ve)	23.81	-0.13	24.50	1.72	1133.66	1.95
B (+ve)	23.81	-0.56	24.50	-7.20	1133.66	-8.17

Total vertical net force; $F_{w,v} = -5.95$ kips

Total horizontal net force; $F_{w,h} = 2.96$ kips

Walls load case 2 - Wind 0, GC_{pi} -0.18, -0C_{pe}

Zone	Ref. height (ft)	Ext pressure coefficient C _{pe}	Peak velocity pressure q _p (psf)	Net pressure p (psf)	Area A _{ref} (ft ²)	Net force F _w (kips)
A ₁	15.00	0.80	22.38	19.63	885.00	17.37
A ₂	15.00	0.80	22.38	19.63	0.00	0.00

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Zone	Ref. height (ft)	Ext pressure coefficient c_{pe}	Peak velocity pressure q_p (psf)	Net pressure p (psf)	Area A_{ref} (ft ²)	Net force F_w (kips)
A ₃	21.00	0.80	23.91	20.67	354.00	7.32
B	23.81	-0.50	24.50	-6.00	1239.00	-7.44
C	23.81	-0.70	24.50	-10.17	874.98	-8.90
D	23.81	-0.70	24.50	-10.17	874.98	-8.90

Overall loading

Projected vertical plan area of wall;

$$A_{vert_w_0} = b \times H = \mathbf{1239.00 \text{ ft}^2}$$

Projected vertical area of roof;

$$A_{vert_r_0} = b \times d/2 \times \tan(\alpha_0) = \mathbf{331.45 \text{ ft}^2}$$

Minimum overall horizontal loading;

$$F_{w,total_min} = p_{min_w} \times A_{vert_w_0} + p_{min_r} \times A_{vert_r_0} = \mathbf{22.48 \text{ kips}}$$

Leeward net force;

$$F_l = F_{w,WB} = \mathbf{-7.4 \text{ kips}}$$

Windward net force;

$$F_w = F_{w,WA_1} + F_{w,WA_2} + F_{w,WA_3} = \mathbf{24.7 \text{ kips}}$$

Overall horizontal loading;

$$F_{w,total} = \max(F_w - F_l + F_{w,h}, F_{w,total_min}) = \mathbf{35.1 \text{ kips}}$$

Roof load case 3 - Wind 90, GC_{pi} 0.18, $-c_{pe}$

Zone	Ref. height (ft)	Ext pressure coefficient c_{pe}	Peak velocity pressure q_p (psf)	Net pressure p (psf)	Area A_{ref} (ft ²)	Net force F_w (kips)
A (-ve)	23.81	-0.90	24.50	-23.15	457.48	-10.59
B (-ve)	23.81	-0.90	24.50	-23.15	457.48	-10.59
C (-ve)	23.81	-0.50	24.50	-14.82	914.96	-13.56
D (-ve)	23.81	-0.30	24.50	-10.66	437.41	-4.66

Total vertical net force;

$$F_{w,v} = \mathbf{-37.68 \text{ kips}}$$

Total horizontal net force;

$$F_{w,h} = \mathbf{0.00 \text{ kips}}$$

Walls load case 3 - Wind 90, GC_{pi} 0.18, $-c_{pe}$

Zone	Ref. height (ft)	Ext pressure coefficient c_{pe}	Peak velocity pressure q_p (psf)	Net pressure p (psf)	Area A_{ref} (ft ²)	Net force F_w (kips)
A ₁	15.00	0.80	22.38	10.81	551.25	5.96
A ₂	20.00	0.80	23.70	11.70	183.75	2.15
A ₃	26.62	0.80	25.09	12.65	140.02	1.77
B	23.81	-0.38	24.50	-12.30	874.98	-10.76
C	23.81	-0.70	24.50	-18.99	1239.00	-23.52
D	23.81	-0.70	24.50	-18.99	1239.00	-23.52

Overall loading

Projected vertical plan area of wall;

$$A_{vert_w_90} = d \times H + d^2 \times \tan(\alpha_0) / 4 = \mathbf{874.98 \text{ ft}^2}$$

Projected vertical area of roof;

$$A_{vert_r_90} = \mathbf{0.00 \text{ ft}^2}$$

Minimum overall horizontal loading;

$$F_{w,total_min} = p_{min_w} \times A_{vert_w_90} + p_{min_r} \times A_{vert_r_90} = \mathbf{14.00 \text{ kips}}$$

Leeward net force;

$$F_l = F_{w,WB} = \mathbf{-10.8 \text{ kips}}$$

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Windward net force;

$$F_w = F_{w,WA_1} + F_{w,WA_2} + F_{w,WA_3} = \mathbf{9.9 \text{ kips}}$$

Overall horizontal loading;

$$F_{w,total} = \max(F_w - F_l + F_{w,h}, F_{w,total_min}) = \mathbf{20.6 \text{ kips}}$$

Roof load case 4 - Wind 90, GC_{pi} -0.18, +C_{pe}

Zone	Ref. height (ft)	Ext pressure coefficient c _{pe}	Peak velocity pressure q _p (psf)	Net pressure p (psf)	Area A _{ref} (ft ²)	Net force F _w (kips)
A (+ve)	23.81	-0.18	24.50	0.66	457.48	0.30
B (+ve)	23.81	-0.18	24.50	0.66	457.48	0.30
C (+ve)	23.81	-0.18	24.50	0.66	914.96	0.61
D (+ve)	23.81	-0.18	24.50	0.66	437.41	0.29

Total vertical net force;

$$F_{w,v} = \mathbf{1.43 \text{ kips}}$$

Total horizontal net force;

$$F_{w,h} = \mathbf{0.00 \text{ kips}}$$

Walls load case 4 - Wind 90, GC_{pi} -0.18, +C_{pe}

Zone	Ref. height (ft)	Ext pressure coefficient c _{pe}	Peak velocity pressure q _p (psf)	Net pressure p (psf)	Area A _{ref} (ft ²)	Net force F _w (kips)
A ₁	15.00	0.80	22.38	19.63	551.25	10.82
A ₂	20.00	0.80	23.70	20.52	183.75	3.77
A ₃	26.62	0.80	25.09	21.47	140.02	3.01
B	23.81	-0.38	24.50	-3.48	874.98	-3.05
C	23.81	-0.70	24.50	-10.17	1239.00	-12.60
D	23.81	-0.70	24.50	-10.17	1239.00	-12.60

Overall loading

Projected vertical plan area of wall;

$$A_{vert_w_90} = d \times H + d^2 \times \tan(\alpha_0) /$$

$$4 = \mathbf{874.98 \text{ ft}^2}$$

Projected vertical area of roof;

$$A_{vert_r_90} = \mathbf{0.00 \text{ ft}^2}$$

Minimum overall horizontal loading;

$$F_{w,total_min} = p_{min_w} \times A_{vert_w_90} + p_{min_r} \times A_{vert_r_90} = \mathbf{14.00 \text{ kips}}$$

Leeward net force;

$$F_l = F_{w,wB} = \mathbf{-3.0 \text{ kips}}$$


Windward net force;

$$F_w = F_{w,WA_1} + F_{w,WA_2} + F_{w,WA_3} = \mathbf{17.6 \text{ kips}}$$




Overall horizontal loading;

$$F_{w,total} = \max(F_w - F_l + F_{w,h}, F_{w,total_min}) = \mathbf{20.6 \text{ kips}}$$


GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

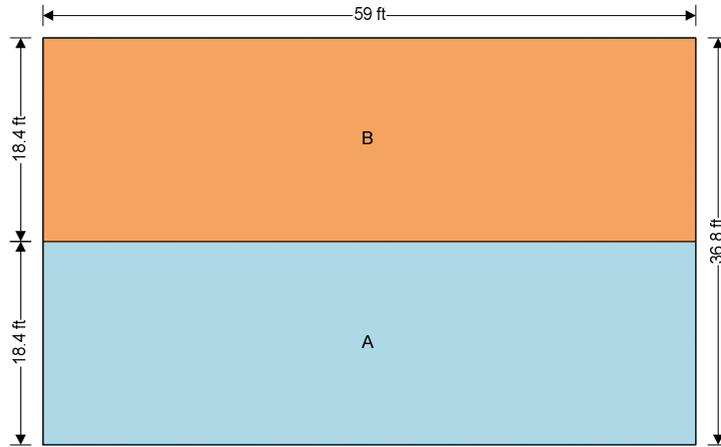


Wind - 0°
 Plan view - Gable roof

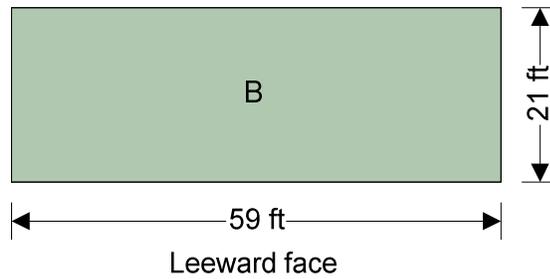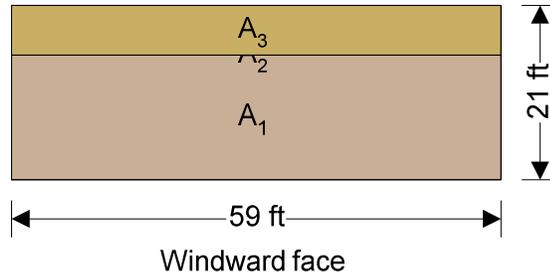


GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

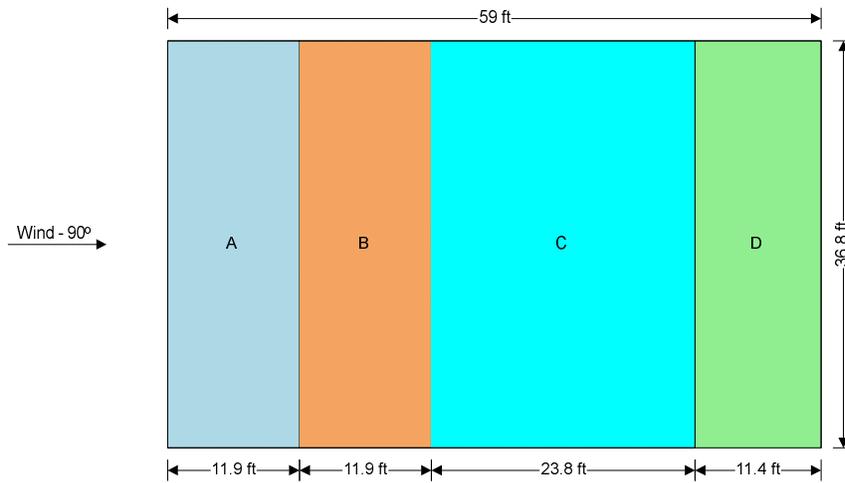


Plan view - Gable roof



Windward face



Side face



Leeward face

;;_AT Roof Top Plates Level

$$\text{Story } w_{\text{wind}} = 23.54 \text{ psf} \times 288.287 \text{ sf} / 36.75 \text{ ft} = 185 \text{ PLF}$$

In the N-S direction




GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Wall Line	a	b
Shear Force (LBF)	3399.375	3399.375
Wall Length (FT)	20.01	13.83
Wall Unit Shear (LB/FT)	339.77	491.59
Uplift (LBF)	1356.67	2085.43
Holddown	CS16	CS14
SW Type	SW1	SW1

At Upper Floor Top Plates Level


In the N-S direction



Wall Line	a	a.4	a.6
Shear Force (LBF)	5158.875	2994.88	7598
Wall Length (FT)	20.01	19.33	10
Wall Unit Shear (LB/FT)	567.19	154.89	759.80
Uplift (LBF)	2903.45	-137.53	4549.68
Holddown	HTT4	NA	HD5B
SW Type	SW4	SW1	SW3

Roof Top Plates Level

In the E-W direction




Wall Line	1	2
Shear Force (LBF)	4809.4	4809.4
Wall Length (FT)	25.9	24.2
Wall Unit Shear (LB/FT)	185.59	198.38
Uplift (LBF)	822.21	891.25
Holddown	CS16	CS16
SW Type	SW1	SW1

GUIBIN LU, PE PO Box 1040, Tacoma, WA 98401-1040 Email: akegl2002@gmail.com Ph: (360)747-7509	Project				Job Ref.	
	Sun Residence Mercer Island				1956	
	Section				Sheet no./rev.	
Calc. by		Date	Chk'd by	Date	App'd by	Date
GL		01-05-2020				

Upper Top Plates Level


In the E-W direction



Wall Line	1	1.6	2
Shear Force (LBF)	9165.15	7368.75	7822.4
Wall Length (FT)	34.75	20.16	21.65
Wall Unit Shear (LB/FT)	263.75	365.51	361.31
Uplift (LBF)	2056.02	1758.99	2769.03
Holddown	HTT4	HTT4	HTT4
SW Type	SW1	SW1	SW1

	SEISMIC lbf/ft (CAPACITY AT ULTIMATE LEVEL)	WIND lbf/ft (CAPACITY AT ULTIMATE LEVEL)
SW1	357	498
SW2	521	729
SW3	670	937
SW4	870	1220

Floor, Floor: Joist at garage
 1 piece(s) 11 7/8" TJI @ 230 @ 12" OC

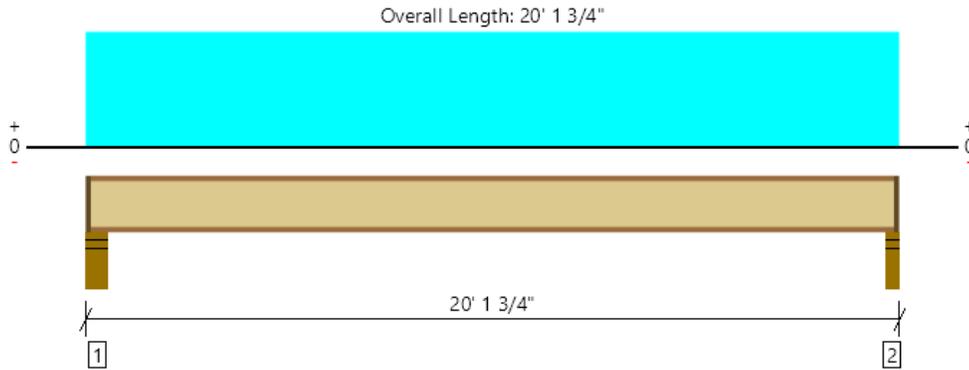

All locations are measured from the outside face of left support (or left cantilever end). All dimensions are horizontal.

Design Results	Actual @ Location	Allowed	Result	LDF	Load: Combination (Pattern)
Member Reaction (lbs)	514 @ 19' 11 1/4"	1183 (2.25")	Passed (43%)	1.00	1.0 D + 1.0 L (All Spans)
Shear (lbs)	504 @ 5 1/2"	1655	Passed (30%)	1.00	1.0 D + 1.0 L (All Spans)
Moment (Ft-lbs)	2487 @ 10' 1 7/8"	4215	Passed (59%)	1.00	1.0 D + 1.0 L (All Spans)
Live Load Defl. (in)	0.358 @ 10' 1 7/8"	0.489	Passed (L/656)	--	1.0 D + 1.0 L (All Spans)
Total Load Defl. (in)	0.465 @ 10' 1 7/8"	0.978	Passed (L/504)	--	1.0 D + 1.0 L (All Spans)
TJ-Pro™ Rating	41	40	Passed	--	--

System : Floor
 Member Type : Joist
 Building Use : Residential
 Building Code : IBC 2015
 Design Methodology : ASD

- Deflection criteria: LL (L/480) and TL (L/240).
- Top Edge Bracing (Lu): Top compression edge must be braced at 5' 5" o/c unless detailed otherwise.
- Bottom Edge Bracing (Lu): Bottom compression edge must be braced at 19' 11" o/c unless detailed otherwise.
- A structural analysis of the deck has not been performed.
- Deflection analysis is based on composite action with a single layer of 23/32" Weyerhaeuser Edge™ Panel (24" Span Rating) that is glued and nailed down.
- Additional considerations for the TJ-Pro™ Rating include: None.

Supports	Bearing Length			Loads to Supports (lbs)			Accessories
	Total	Available	Required	Dead	Floor Live	Total	
1 - Stud wall - HF	5.50"	4.25"	1.75"	122	406	528	1 1/4" Rim Board
2 - Stud wall - HF	3.50"	2.25"	1.75"	120	400	520	1 1/4" Rim Board

• Rim Board is assumed to carry all loads applied directly above it, bypassing the member being designed.


Vertical Load	Location (Side)	Spacing	Dead (0.90)	Floor Live (1.00)	Comments
1 - Uniform (PSF)	0 to 20' 1 3/4"	12"	12.0	40.0	Default Load

Weyerhaeuser Notes
 Weyerhaeuser warrants that the sizing of its products will be in accordance with Weyerhaeuser product design criteria and published design values. Weyerhaeuser expressly disclaims any other warranties related to the software. Use of this software is not intended to circumvent the need for a design professional as determined by the authority having jurisdiction. The designer of record, builder or framer is responsible to assure that this calculation is compatible with the overall project. Accessories (Rim Board, Blocking Panels and Squash Blocks) are not designed by this software. Products manufactured at Weyerhaeuser facilities are third-party certified to sustainable forestry standards. Weyerhaeuser Engineered Lumber Products have been evaluated by ICC-ES under evaluation reports ESR-1153 and ESR-1387 and/or tested in accordance with applicable ASTM standards. For current code evaluation reports, Weyerhaeuser product literature and installation details refer to www.weyerhaeuser.com/woodproducts/document-library.
 The product application, input design loads, dimensions and support information have been provided by ForteWEB Software Operator



ForteWEB Software Operator	Job Notes
GLU GL Architectural Engineering (360) 747-7509 akegl2002@gmail.com	

Floor, Floor: Joist at living room
 Current Solution: 1 piece(s) 11 7/8" TJI @ 230 @ 16" OC

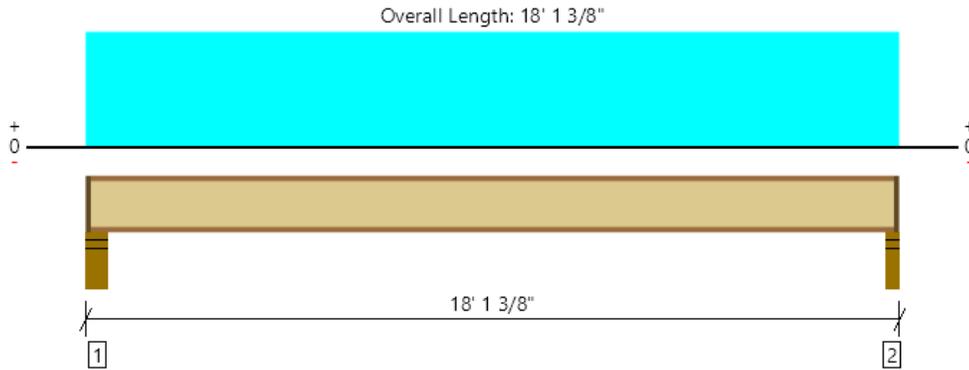

All locations are measured from the outside face of left support (or left cantilever end). All dimensions are horizontal.

Design Results	Actual @ Location	Allowed	Result	LDF	Load: Combination (Pattern)
Member Reaction (lbs)	615 @ 17' 10 7/8"	1183 (2.25")	Passed (52%)	1.00	1.0 D + 1.0 L (All Spans)
Shear (lbs)	602 @ 5 1/2"	1655	Passed (36%)	1.00	1.0 D + 1.0 L (All Spans)
Moment (Ft-lbs)	2664 @ 9' 1 11/16"	4215	Passed (63%)	1.00	1.0 D + 1.0 L (All Spans)
Live Load Defl. (in)	0.306 @ 9' 1 11/16"	0.438	Passed (L/688)	--	1.0 D + 1.0 L (All Spans)
Total Load Defl. (in)	0.398 @ 9' 1 11/16"	0.877	Passed (L/529)	--	1.0 D + 1.0 L (All Spans)
TJ-Pro™ Rating	42	40	Passed	--	--

System : Floor
 Member Type : Joist
 Building Use : Residential
 Building Code : IBC 2015
 Design Methodology : ASD

All Product Solutions						
Depth	Series	Plies	Spacing	TJ-Pro™ Rating	Wood Volume	
11 7/8"	TJI @ 210	1	12"	46	1.06	
11 7/8"	TJI @ 210	1	16"	41	0.79	
11 7/8"	TJI @ 210	2	12"	57	2.12	
11 7/8"	TJI @ 210	2	16"	53	1.59	
11 7/8"	TJI @ 230	1	12"	48	1.15	
11 7/8"	TJI @ 230	1	16"	42	0.86	
11 7/8"	TJI @ 230	2	12"	58	2.30	
11 7/8"	TJI @ 230	2	16"	54	1.72	
11 7/8"	TJI @ 360	1	12"	50	1.36	
11 7/8"	TJI @ 360	1	16"	45	1.02	
11 7/8"	TJI @ 360	2	12"	60	2.72	
11 7/8"	TJI @ 360	2	16"	56	2.04	

The purpose of this report is for product comparison only. Load and support information necessary for professional design review is not displayed here. Please print an individual Member Report for submittal purposes.

ForteWEB Software Operator GLu GL Architectural Engineering (360) 747-7509 akegl2002@gmail.com	Job Notes
--	-----------