

**Stormwater Drainage Report
4104 83rd Avenue SE
Mercer Island, Washington
KC Tax Parcel #362650-0040
Permit #: XXXX-XXX**

Prepared For:

**JayMarc Diamond, LLC
Attn.: Gary Upper
7525 SE 24th Street
Suite #520
Mercer Island, Washington 98040
425-281-2706
Gary@jaymarchomes.com**

December 7, 2023

Prepared By:

**Offe Engineers, PLLC
Darrell Offe, P.E.
13932 SE 159th Place
Renton, Washington 98058
425-260-3412
Darrell.Offe@comcast.net**

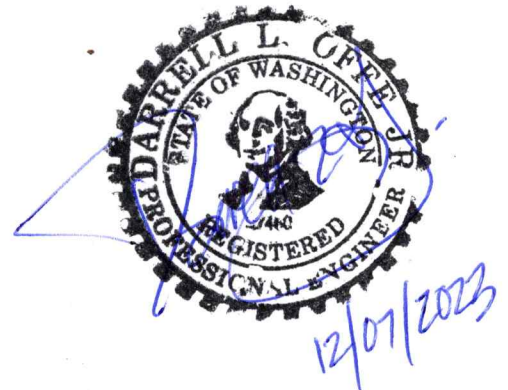


TABLE OF CONTENT

Section 1: Project Narrative

Section 2: Site Evaluation

Section 3: Minimum Requirements

Appendix A: Geotechnical Evaluation

Appendix B: WWHM Modeling

Section 1: Project Narrative:

The subject property is located on the west of Island Crest Way and North of SE 42nd Street. The subject property takes access from the 83rd Avenue SE on at the northwest corner of the property. There is an existing house, long asphalt driveway, and patio area on the property. These features will all be removed for the new residence. All public and franchise utilities are located on the west side within 83rd Avenue SE.

The site soils are characterized between Vashon Glacial Till and infeasible for infiltration type BMPs by Cobalt Geosciences, Geotechnical Evaluation attached within this Report. City staff has determined that on-site detention is required for this new development, sizing of on-site system is included within the Report.

The property was visited in September and November 2023 to verify runoff patterns and possible storm water discharge options. The downstream system was reviewed and walked, where possible.

The project will be evaluated for storm water treatment and control using the Amended December 2014 SWMMWW (DOE Manual).

TOPOGRAPHIC & BOUNDARY SURVEY

LEGAL DESCRIPTION

PER PERSONAL REPRESENTATIVE'S DEED RECORDING #0511000288

LOT 8, BLOCK 1, ISLAND RIDGE TRACTS, ACCORDING TO THE PLAT RECORDED IN VOLUME 47 OF PLATS, PAGE 71, IN KING COUNTY, WASHINGTON.

BASIS OF BEARINGS

N 89°48'50" E BETWEEN FOUND CENTERLINE MONUMENTATION ALONG SE 42ND ST PER PLAT

REFERENCES

- R1. RECORD OF SURVEY, VOL. 132, PG. 105, RECORDS OF KING COUNTY, WASHINGTON.
- R2. RECORD OF SURVEY, VOL. 71, PG. 216, RECORDS OF KING COUNTY, WASHINGTON.

VERTICAL DATUM

HANDS PER CITY OF MERCER ISLAND BENCHMARK #3060 COND MON W/ 2" BRASS CAP W/ PUNCH, DOWN 0.75'. (INTERSECTION OF ISLAND CREST WAY & SE 42ND ST) ELEV: 284.936'

SITE TEMP. BENCHMARK DESCRIPTION: SET BENCHMARK IN PP LOCATION: WEST SIDE 83RD AVE SE ELEVATION: 274.71'

SURVEYOR'S NOTES

1. THE TOPOGRAPHIC SURVEY SHOWN HEREON WAS PERFORMED IN 2023 BY THE FIELD DATA WAS COLLECTED AND RECORDED ON MAGNETIC MEDIA THROUGH AN ELECTRONIC THEODOLITE. THE DATA FILE IS ARCHIVED ON DISC OR CD. WRITTEN FIELD NOTES MAY NOT EXIST. CONTOURS ARE SHOWN FOR CONVENIENCE ONLY. DESIGN SHOULD RELY ON SPOT ELEVATIONS.
2. ALL MONUMENTS SHOWN HEREON WERE LOCATED DURING THE COURSE OF THIS SURVEY UNLESS OTHERWISE NOTED.
3. THE TYPES AND LOCATIONS OF ANY UTILITIES SHOWN ON THIS DRAWING ARE BASED ON INFORMATION PROVIDED TO US, BY OTHERS OR GENERAL INFORMATION READILY AVAILABLE IN THE PUBLIC DOMAIN INCLUDING, AS APPLICABLE, IDENTIFYING MARKINGS PLACED BY UTILITY LOCATE SERVICES AND OBSERVED BY TERRANE IN THE FIELD. AS SUCH, THE UTILITY INFORMATION SHOWN ON THESE DRAWINGS ARE FOR INFORMATIONAL PURPOSES ONLY AND SHOULD NOT BE RELIED ON FOR DESIGN OR CONSTRUCTION PURPOSES. TERRANE IS NOT RESPONSIBLE OR LIABLE FOR THE ACCURACY OR COMPLETENESS OF THIS UTILITY INFORMATION. FOR THE ACCURATE LOCATION AND TYPE OF UTILITIES NECESSARY FOR DESIGN AND CONSTRUCTION, PLEASE CONTACT THE SITE OWNER AND THE LOCAL UTILITY LOCATE SERVICE (800-424-5555).
4. SUBJECT PROPERTY TAX PARCEL NO. 3628500040
5. SUBJECT PROPERTY AREA PER THIS SURVEY IS 14,078 S.F. (0.32 ACRES)
6. EXISTING STRUCTURE(S) LOCATION AND DIMENSIONS ARE MEASURED FROM THE FACE OF THE SIDING UNLESS OTHERWISE NOTED.
7. FIELD DATA FOR THIS SURVEY WAS OBTAINED BY DIRECT FIELD MEASUREMENTS WITH A CALIBRATED ELECTRONIC 3-SECOND TOTAL STATION AND/OR SURVEY GRADE GPS OBSERVATIONS. ALL ANGULAR AND LINEAR RELATIONSHIPS ARE ACCURATE AND MEET THE STANDARDS SET BY WAC 332-130-090.

LEGEND


	BENCHMARK		POWER POLE
	CENTERLINE ROW		POWER (OVERHEAD)
	FENCE LINE (WOOD)		INLET (TYPE 1)
	MONUMENT (IN CASE, FOUND)		STORM DRAIN LINE
	PROPERTY LINES (ADJACENT)		SEWER MANHOLE
	PROPERTY LINE (SUB-ADJ)		SEWER LINE
	REBAR & CAP (SET)		WATER METER
	REBAR AS NOTED (FOUND)		WATER LINE
	RETAINING WALL		BLDG
	RIGHT-OF-WAY LINES		CALCD
	SUBDIVISION LINES		CATCH BASIN
	BUILDING		CITY OF SEATTLE
	POST		CONC
	TREE (AS NOTED)		CORNER
	ASPHALT SURFACE		DISC
	CONCRETE SURFACE		ELEVATION
	DECK		EVERGREEN
	GRAVEL SURFACE		FISH FLOOR
	ROCKERY		GAS
	GAS METER		LAND SURVEYOR NUMBER
	GAS LINE		MEASURED
	POWER METER		MONUMENT
			OVERHEAD POWER
			PROPERTY
			STORM DRAIN
			SANITARY SEWER MANHOLE
			SQUARE FEET

VICINITY MAP



INDEXING INFORMATION

NE 1/4	NE 1/4	NE 1/4
SECTION: 13	TOWNSHIP: 26N	RANGE: 04E, 11M
COUNTY: KING		

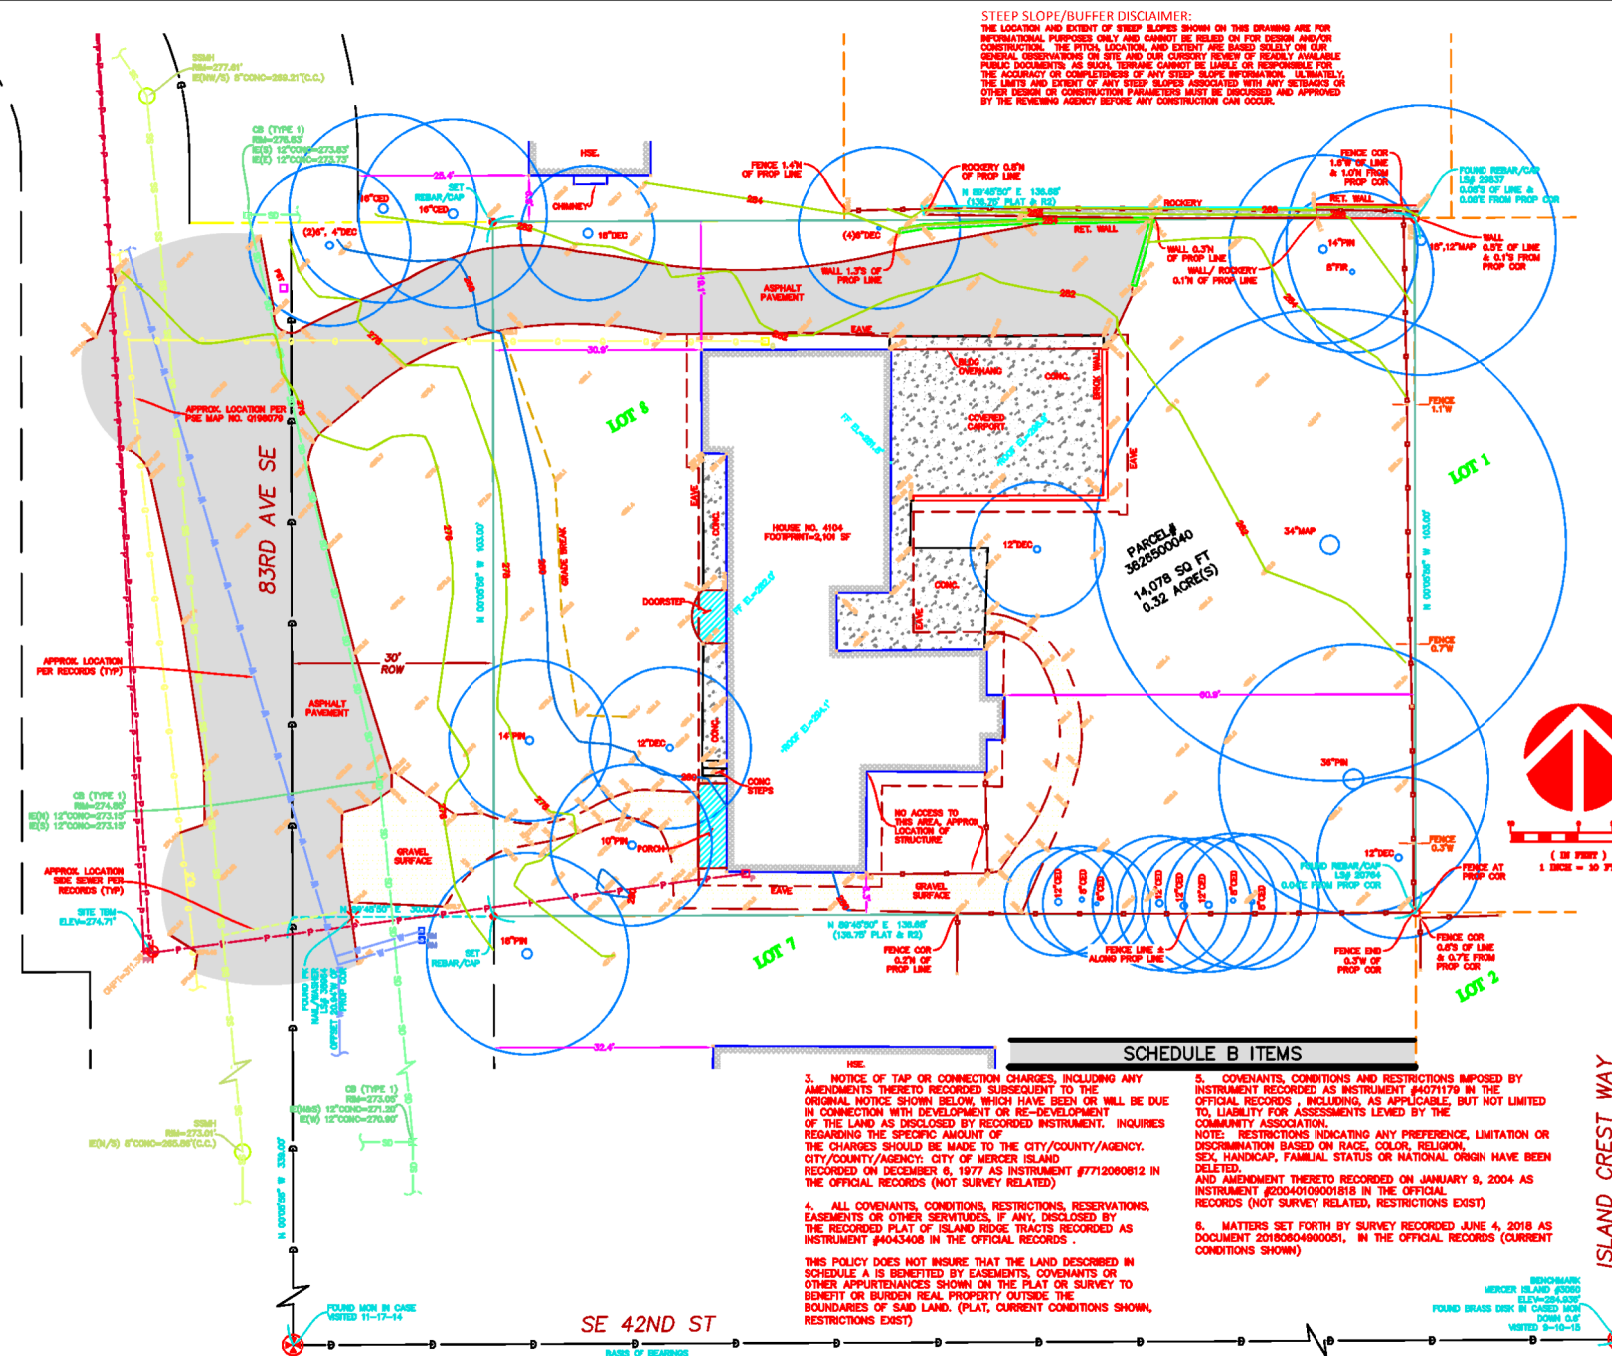

STEEP SLOPE/BUFFER DISCLAIMER:
THE LOCATION AND EXTENT OF STEEP SLOPES SHOWN ON THIS DRAWING ARE FOR INFORMATIONAL PURPOSES ONLY AND CANNOT BE RELIED ON FOR DESIGN AND/OR CONSTRUCTION. THE PITCH, LOCATION, AND EXTENT ARE BASED SOLELY ON OUR GENERAL OBSERVATIONS ON SITE AND OUR CURRENT REVIEW OF READILY AVAILABLE PUBLIC DOCUMENTS. AS SUCH, TERRANE CANNOT BE HELD OR RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF ANY STEEP SLOPE INFORMATION. ULTIMATELY, THE LIMITS AND EXTENT OF ANY STEEP SLOPES ASSOCIATED WITH ANY SETBACKS OR OTHER DESIGN OR CONSTRUCTION PARAMETERS MUST BE DETERMINED AND APPROVED BY THE REVIEWING AGENCY BEFORE ANY CONSTRUCTION CAN OCCUR.

- ### SCHEDULE B ITEMS
3. NOTICE OF TAP OR CONNECTION CHARGES, INCLUDING ANY AMENDMENTS THERETO RECORDED SUBSEQUENT TO THE ORIGINAL NOTICE SHOWN BELOW, WHICH HAVE BEEN OR WILL BE DUE IN CONNECTION WITH DEVELOPMENT OR RE-DEVELOPMENT OF THE LAND AS DISCLOSED BY RECORDED INSTRUMENT, INQUIRES REGARDING THE SPECIFIC AMOUNT OF THE CHARGES SHOULD BE MADE TO THE CITY/COUNTY/AGENCY. CITY/COUNTY/AGENCY: CITY OF MERCER ISLAND RECORDED ON DECEMBER 6, 1977 AS INSTRUMENT #7712080812 IN THE OFFICIAL RECORDS (NOT SURVEY RELATED).
 4. ALL COVENANTS, CONDITIONS, RESTRICTIONS, RESERVATIONS, EASEMENTS OR OTHER SERVITUDES, IF ANY, DISCLOSED BY THE RECORDED PLAT OF ISLAND RIDGE TRACTS RECORDED AS INSTRUMENT #4043408 IN THE OFFICIAL RECORDS.
 5. COVENANTS, CONDITIONS AND RESTRICTIONS IMPOSED BY INSTRUMENT RECORDED AS INSTRUMENT #4071179 IN THE OFFICIAL RECORDS, INCLUDING, AS APPLICABLE, BUT NOT LIMITED TO, LIABILITY FOR ASSESSMENTS LEVIED BY THE COMMUNITY ASSOCIATION. NOTE: RESTRICTIONS INDICATING ANY PREFERENCE, LIMITATION OR DISCRIMINATION BASED ON RACE, COLOR, RELIGION, SEX, HANDICAP, FAMILIAL STATUS OR NATIONAL ORIGIN HAVE BEEN DELETED. AND AMENDMENT THERETO RECORDED ON JANUARY 9, 2004 AS INSTRUMENT #20040109001818 IN THE OFFICIAL RECORDS (NOT SURVEY RELATED, RESTRICTIONS EXIST).
 6. MATTERS SET FORTH BY SURVEY RECORDED JUNE 4, 2016 AS DOCUMENT 20160604800051, IN THE OFFICIAL RECORDS (CURRENT CONDITIONS SHOWN).
- THIS POLICY DOES NOT INSURE THAT THE LAND DESCRIBED IN SCHEDULE A IS BENEFITED BY EASEMENTS, COVENANTS OR OTHER APPURTENANCES SHOWN ON THE PLAT OR SURVEY TO BENEFIT OR BURDEN REAL PROPERTY OUTSIDE THE BOUNDARIES OF SAID LAND. (PLAT, CURRENT CONDITIONS SHOWN, RESTRICTIONS EXIST)

TOPOGRAPHIC & BOUNDARY SURVEY
PARCEL NO. 3628500040
JAYMARC HOMES, LLC
4104 83RD AVE SE
MERCER ISLAND, WA 98040

JOB NUMBER:	231294
DATE:	08/02/23
DRAFTED BY:	TDB
CHECKED BY:	JLR/TRM
SCALE:	1" = 10'
REVISION HISTORY:	
1/4/23 ADD TITLE	
SHEET NUMBER:	1 OF 1

Section 2: Site Evaluation

Total Lot Area = 14,078 square feet (0.32 acres)

EXISTING CONDITIONS

Impervious:

Roof area = 3,708 sq. feet
Uncovered walkway = 542 sq. feet
Uncovered patio = 138 sq. feet
Uncovered driveway = 1,563 sq. feet ((PGHS))
Subtotal: 5,951 sq. feet

Pervious:

Lawn, trees, landscaping = *8,127 sq. feet*

DEVELOPED CONDITIONS

Impervious (hard) surfaces:

House roof area w/overhang = 4,988 sq. feet
Uncovered driveway = 722 sq. feet ((PGHS))
Uncovered walkway/pads = 104 sq. feet
Total Impervious (Hard) Surfaces = 5,814 sq. feet

Pervious Surfaces:


Ex. Lawn, trees, landscaping = *8,127 sq. feet*
Added landscaping = 137 sq. feet
Total Pervious Surfaces = 8,264 square feet

((PGHS)) -Pollution Generating Hard Surface

Summary of Project Information

Project Site Area	14,078 square feet
Existing Impervious Area	5,921 sq. feet
Existing Impervious Coverage	42.0%
New Impervious Area	3,248 sq. feet
Replaced Impervious Area	2,566 sq. feet
New plus Replaced Impervious	5,814 square feet
Proposed Impervious Area	5,814 square feet
Converted pervious: Native to lawn	0 sq. feet
Converted pervious: Native to pasture	0 sq. feet
Total Area of Land Disturbance	9,000 square feet

The existing property has greater than 35% (42.0%) impervious coverage and the total proposed project new plus replaced impervious surfaces will be greater than 5,000 (5,814) square feet; using Figure I-2.4.2 – "Flow Chart for Determining Minimum Requirements for Redevelopment" page 38, 2014 Stormwater Management Manual for Western Washington, Minimum Requirements #1 – #9 apply to this project.

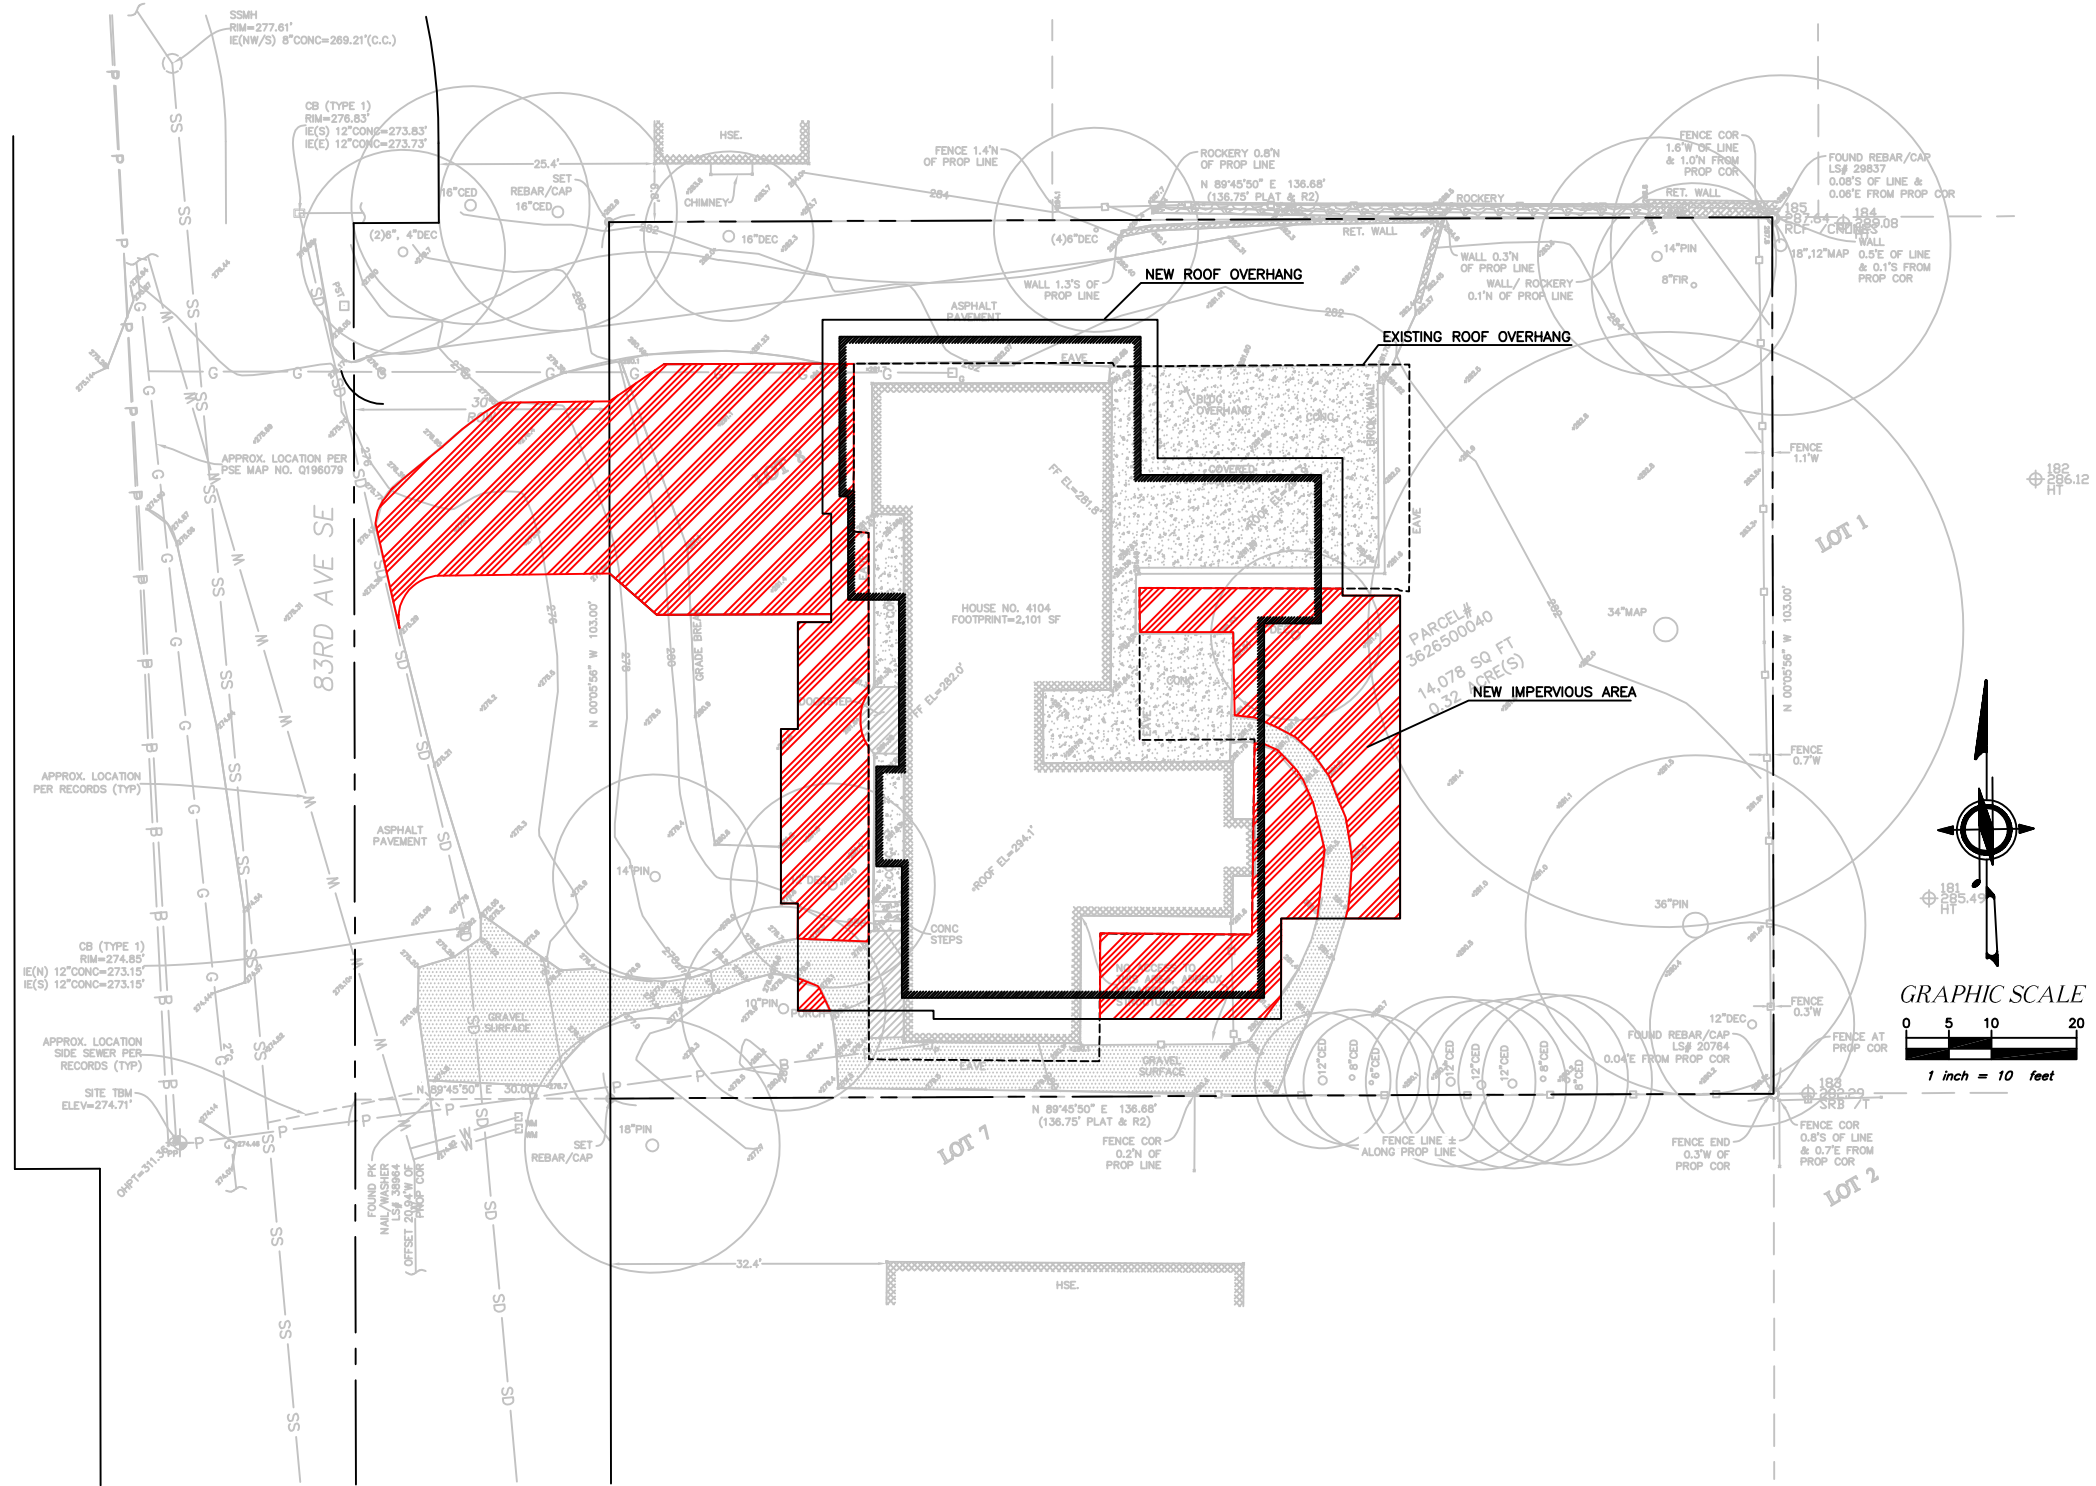

FLOW CHART FIGURE II-2.4.1

Figure I-2.4.1 Flow Chart for Determining Requirements for New Development

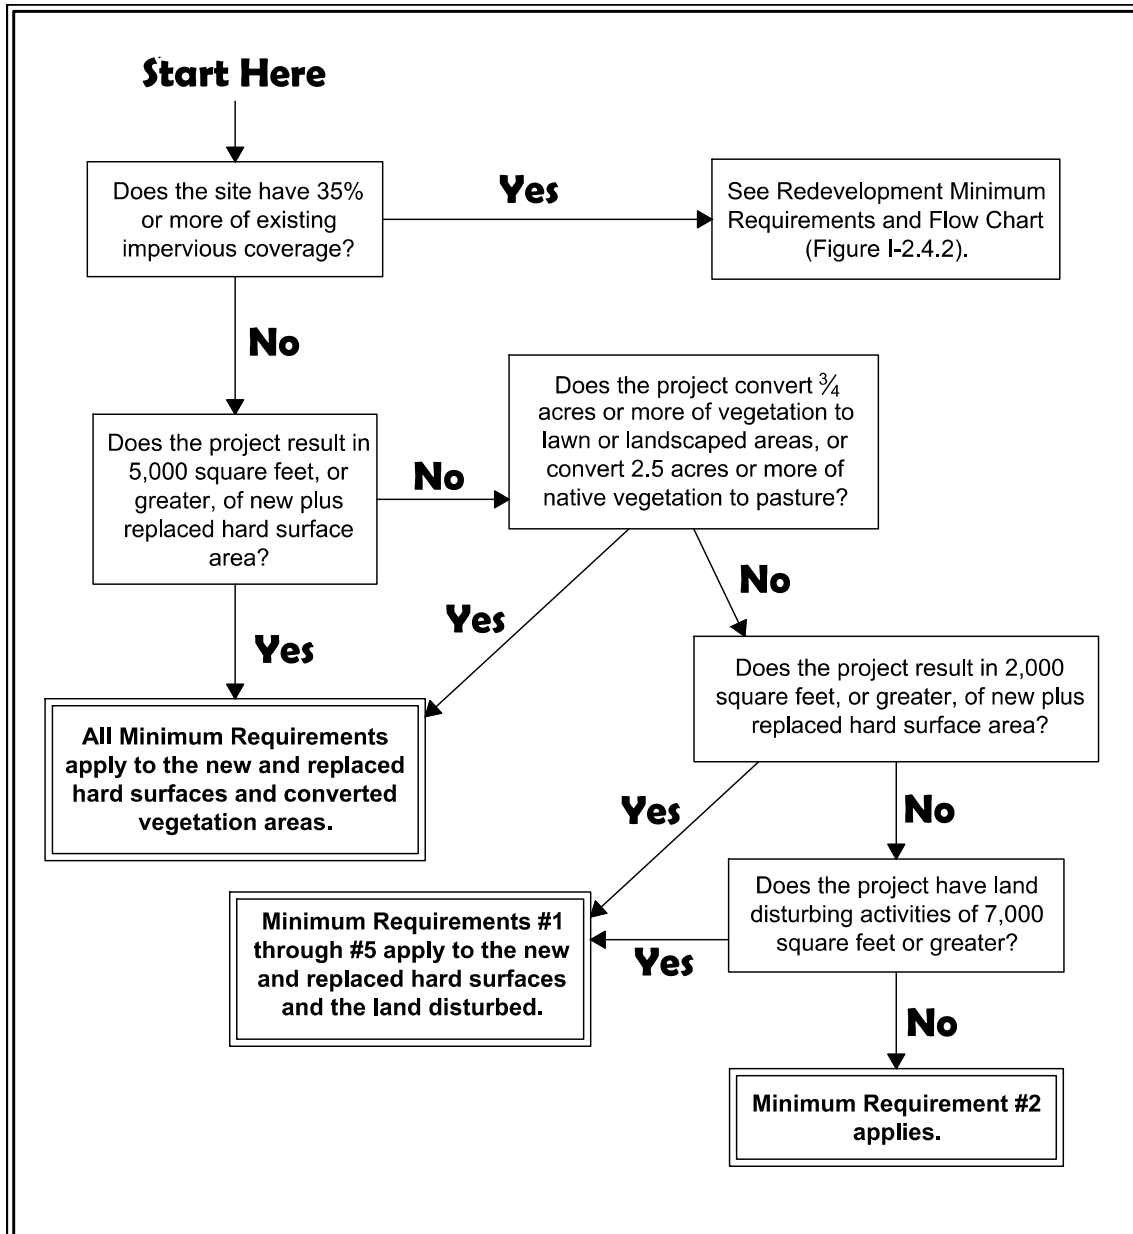
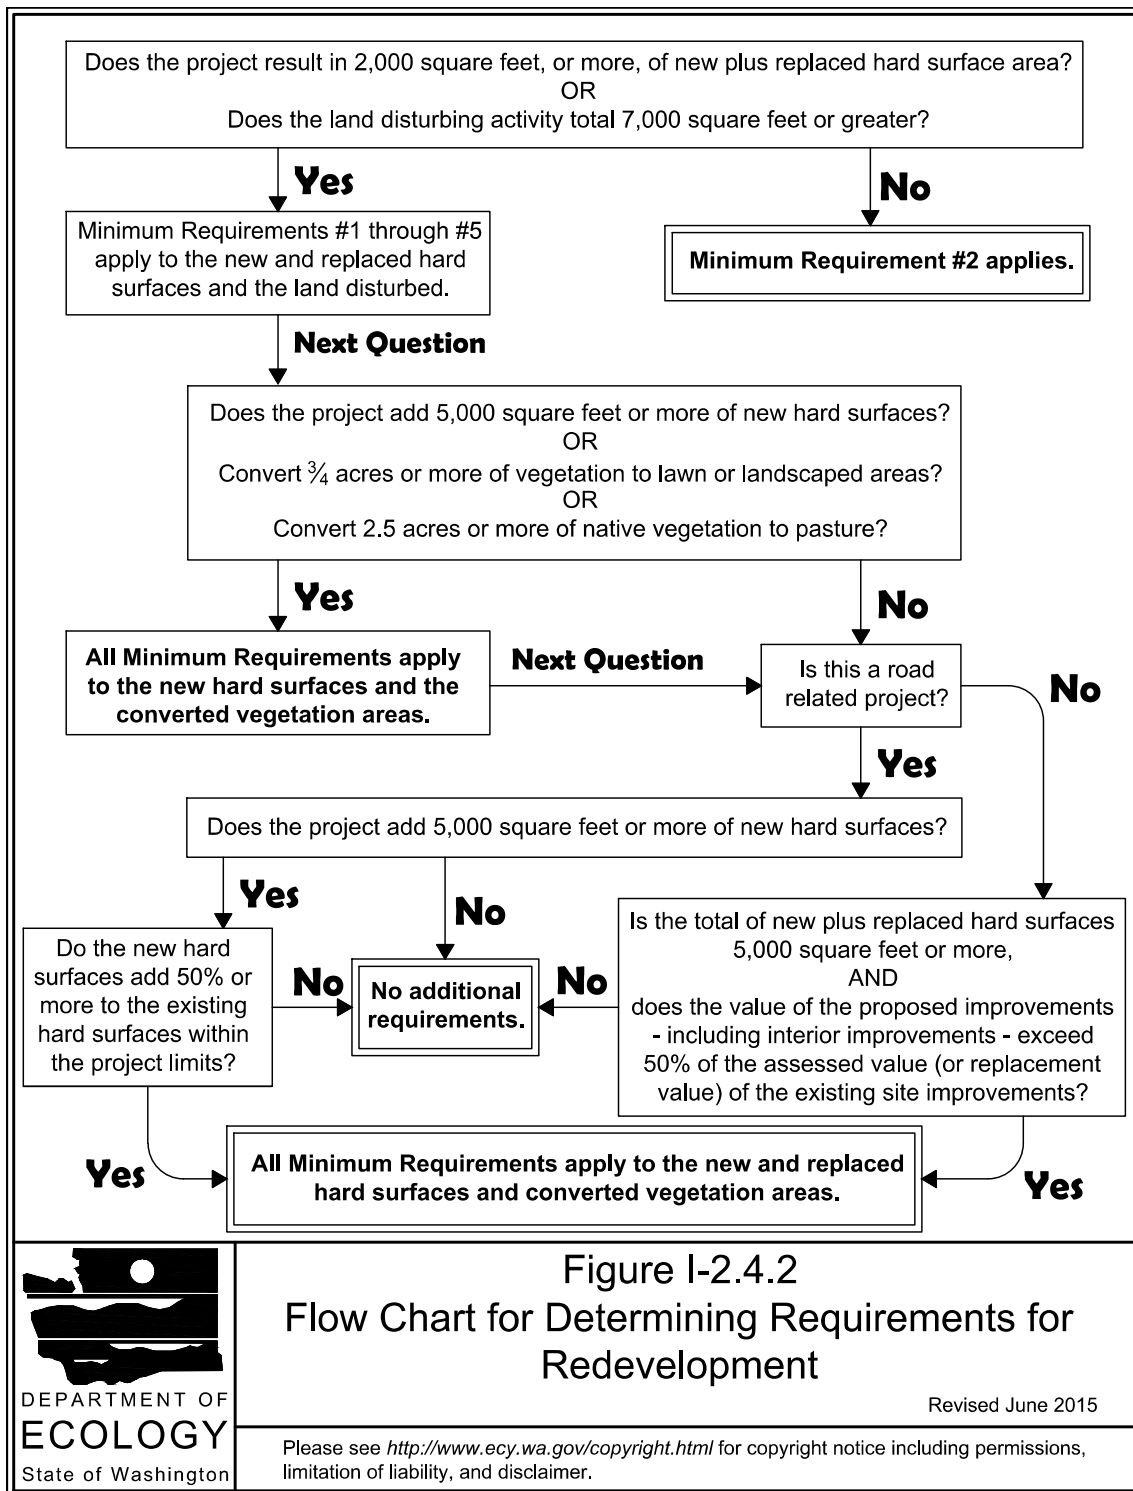


Figure I-2.4.1
Flow Chart for Determining Requirements for New Development

Revised June 2015

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

Figure I-2.4.2 Flow Chart for Determining Requirements for Redevelopment



**Figure I-2.4.2
Flow Chart for Determining Requirements for Redevelopment**

Revised June 2015

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

Section 3: Minimum Requirements

Based upon the Flow Chart Figure I-2.4.1 and I-2.4.2 (Amended December 2014 SWMMWW, DOE Manual), all Minimum Requirements 1-9 apply to this project.

Section I-2.5.1 Minimum Requirement #1 – Preparation of Stormwater Site Plans

A Stormwater site plan (drainage plan) has been prepared for this project together with construction details for installation of the proposed drainage control system. The Stormwater site plans and drainage narrative shall be submitted and reviewed by the City of Mercer Island as part of the building permit application.

NE 1/4 OF THE NE 1/4 OF SECTION 13, TOWNSHIP 24 NORTH., RANGE 4 EAST, W.M., KING COUNTY, WA.


EXISTING UTILITY LOCATIONS SHOWN HEREON ARE APPROXIMATE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXACT VERTICAL AND HORIZONTAL LOCATION OF ALL EXISTING UNDERGROUND UTILITIES PRIOR TO COMMENCING CONSTRUCTION. NO REPRESENTATION IS MADE THAT ALL EXISTING UTILITIES ARE SHOWN HEREON. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR UTILITIES NOT SHOWN OR UTILITIES NOT SHOWN IN THEIR PROPER LOCATION.
CALL BEFORE YOU DIG: 811

LEGEND

- ASPHALT SURFACE
- BRICK SURFACE
- BUILDING
- CENTERLINE ROW
- CLEANOUT
- CULVERT PIPE
- CONCRETE SURFACE
- RETAINING WALL
- DECK
- FENCE LINE (CHAIN LINK)
- FENCE LINE (WOOD)
- GAS METER
- GRAVEL SURFACE
- HEDGE FOLIAGE LINE
- INLET (TYPE 1)
- MAILBOX (RESIDENTIAL)
- EXISTING SPOT ELEVATIONS
- MONUMENT IN CASE (FOUND)
- POWER METER
- POWER (OVERHEAD)
- POWER POLE
- REBAR AS NOTED (FOUND)
- ROCKERY
- SEWER LINE
- SEWER MANHOLE
- STORM DRAIN LINE
- TELEPHONE (OVERHEAD)
- TELEPHONE SENTRY
- WATER METER
- POWER TRANSFORMER POLE
- TREE (AS NOTED)

ONSITE		TREE TABLE		Limit of Development		
ID	Species	Dbh	Dripline	Classification	LOD	RETAIN REMOVE
1	Ponderosa Pine	18	28	Significant	15	
2	Blue spruce	12	16	Significant	10	12
3	Flowering cherry	14	24	Significant	14	14
4	Laceleaf Maple	3	5	Not significant	N/A	3
5	Mugo Pine	5	8	Not significant	N/A	5
8	Leyland cypress	12	18	Significant	10	12
9	Leyland cypress	5	8	Not significant	N/A	5
10	Leyland cypress	4	6	Not significant	N/A	4
11	Leyland cypress	4	6	Not significant	N/A	4
12	Leyland cypress	3	6	Not significant	N/A	3
13	Leyland cypress	10	12	Significant	10	
14	Leyland cypress	10	14	Significant	10	
15	Leyland cypress	10	14	Significant	10	
16	Leyland cypress	6	8	Significant	10	
17	Leyland cypress	6	8	Significant	10	
18	Hawthorn	10	22	Significant	12	
19	Douglas-fir	40	42	Exceptional	116	
20	Big leaf maple	46.0	79	Exceptional	16	
21	Douglas-fir	8	16	Significant	10	
22	Douglas-fir	14	30	Significant	16	
23	Goldenchain tree	18		Significant	28	18
24	Vine Maple	10	18	Significant	28	10
Percentage Saved					71.4%	

OFFSITE		TREE TABLE		Limit of Development		
ID	Species	Dbh	Dripline	Classification	LOD	RETAIN REMOVE
1	Ponderosa Pine	18	28	Significant	15	
6	Saucer magnolia	7	16	Significant	10	
7	Holly	4	8	Not significant	N/A	
25	Hazelnut	N/A	N/A	N/A		
26	Hawthorn	10	18	Significant	10	
27	Evergreen Magnolia	6	10	Significant	14	
29	Big leaf maple	18	18	Significant	18	

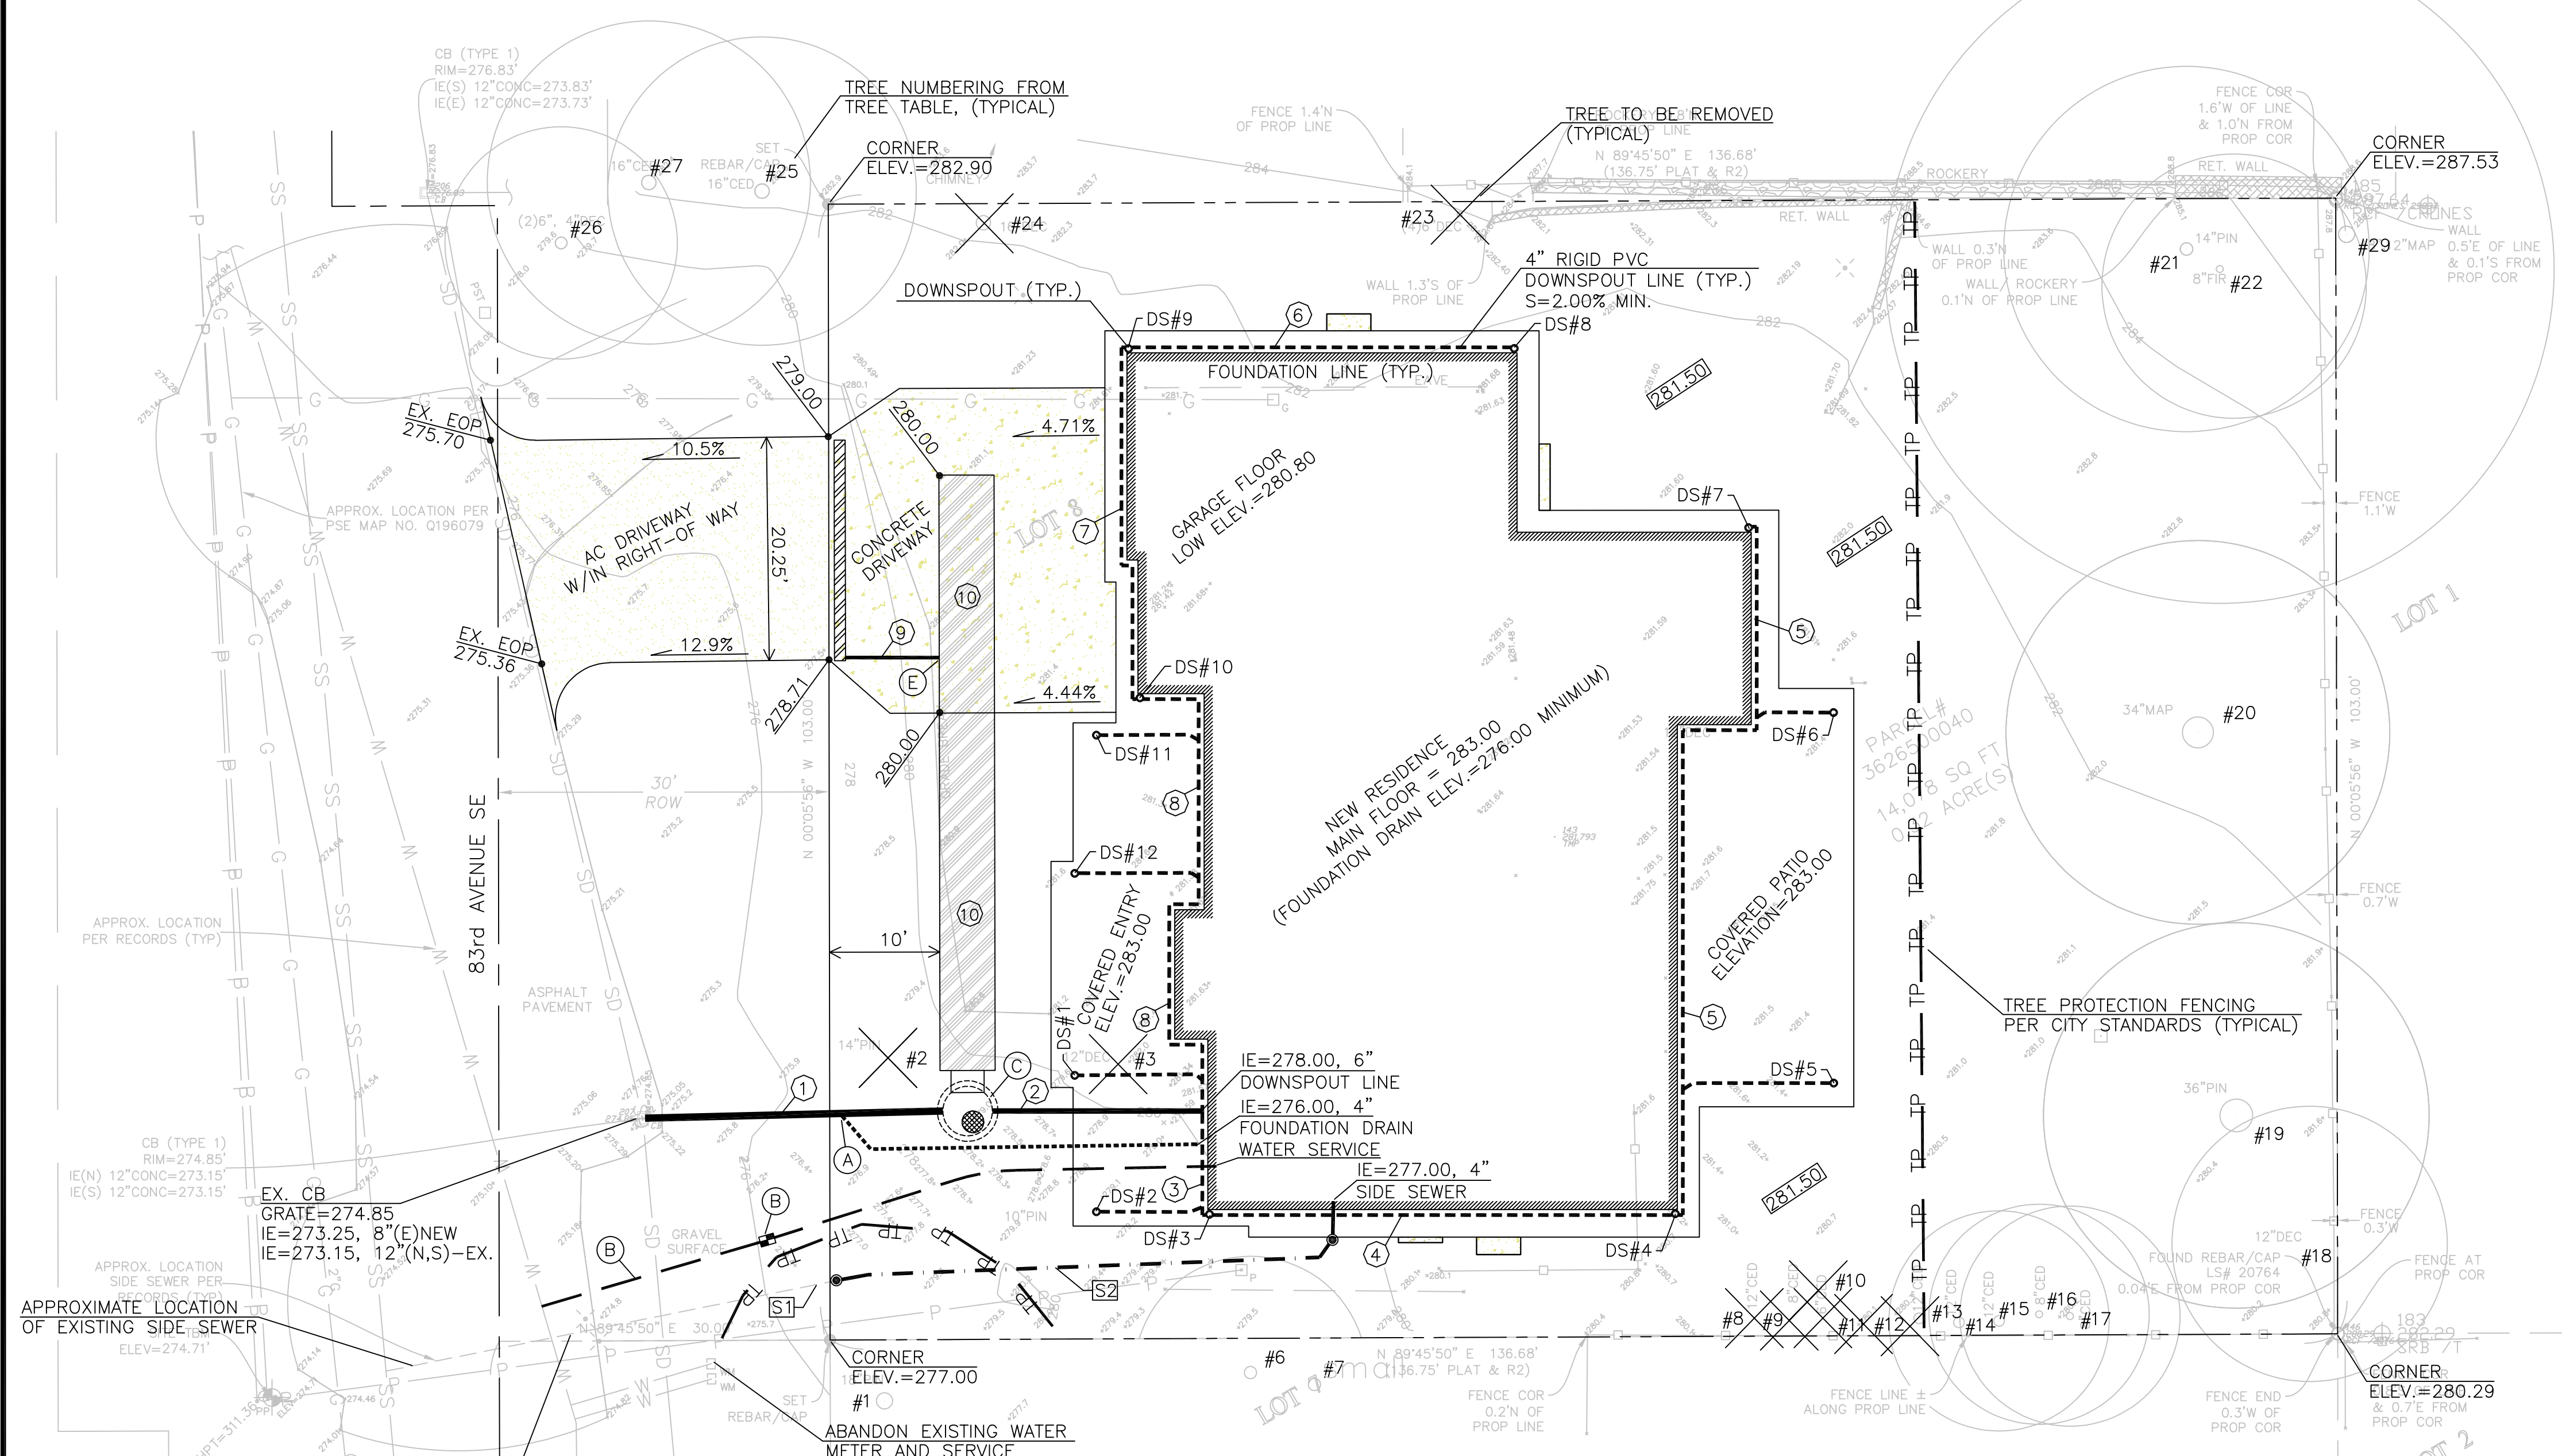

NOTE: A TV INSPECTION OF THE EXISTING SIDE SEWER TO THE CITY SEWER MAIN IN WEST MERCER WAY IS REQUIRED PRIOR TO ANY WORK RELATED TO THE SIDE SEWER. IF THE RESULT OF THE TV INSPECTION IS NOT IN SATISFACTORY CONDITION, AS DETERMINED BY THE CITY OF MERCER ISLAND INSPECTOR, THE REPLACEMENT OF THE EXISTING SIDE SEWER IS REQUIRED TO THE SEWER MAIN.

DS#	Material	Length	Slope
DS#1	CONCRETE	283.00	4"
DS#2	CONCRETE	283.00	4"
DS#3	GROUND	280.00	4"
DS#4	GROUND	281.50	4"
DS#5	CONCRETE	283.00	4"
DS#6	CONCRETE	283.00	4"
DS#7	GROUND	281.50	4"
DS#8	GROUND	281.50	4"
DS#9	GROUND	280.60	4"
DS#10	CONCRETE	280.80	4"
DS#11	CONCRETE	283.00	4"
DS#12	CONCRETE	283.00	4"

ID	Material	Length	Slope
1	27LF., 8" D.I.	8"	S=0.50%
2	20LF., 6" PVC	SDR-35	S=7.50%
3	10LF., 4" PVC	SDR-35	S=3.50%
4	42LF., 4" PVC	SDR-35	S=2.00%
5	72LF., 4" PVC	SDR-35	S=2.00%
6	35LF., 4" PVC	SDR-35	S=2.71%
7	34LF., 4" PVC	SDR-35	S=2.00%
8	50LF., 4" PVC	SDR-35	S=2.00%
9	10LF., 4" CMP		S=14.6%
10	54LF., 60" CMP		S=0.50%

SIDE SEWER NOTES
 [S1] APPROXIMATE LOCATION OF EXISTING SANITARY SIDE SEWER.
 [S2] INSTALL 50LF., 4" PVC SIDE SEWER @ MIN. 2% SLOPE W/SANITARY SEWER CLEANOUTS

NOTE: CONNECT 4" FOUNDATION DRAIN AT LOCATION SHOWN ON PLANS - ONLY!


NOTE: 4" PERFORATED FOUNDATION DRAIN REQUIRED BUT NOT SHOWN ON PLAN, CONNECT WHERE SHOWN ON PLAN, WYE INTO DETENTION TANK OUTFALL

NOTE: THE LAWN AND LANDSCAPE AREAS ARE REQUIRED TO PROVIDE POST-CONSTRUCTION SOIL QUALITY AND DEPTH IN ACCORDANCE WITH BMP T5.13. THE PROJECT CIVIL ENGINEER MUST PROVIDE A LETTER OF CERTIFICATION TO ENSURE THAT THE LAWN AND LANDSCAPE AREAS ARE MEETING THE POST-CONSTRUCTION SOIL QUALITY AND DEPTH REQUIREMENTS SPECIFIED ON THE APPROVED PLAN SET PRIOR TO FINAL INSPECTION OF THE PROJECT.

- NOTES:**
- (A) 4" FOUNDATION DRAIN CONNECTION IE=273.60, 8"x4" WYE
 - (B) INSTALL 1-1/2" METER AND 2" SERVICE LINE PER CITY OF MERCER ISLAND STANDARD PLAN W-14.
NOTE: CONTRACTOR TO COORDINATE FINAL LOCATION OF NEW METER WITH CITY OF MERCER ISLAND INSPECTOR AT TIME OF CONSTRUCTION
 - (C) CB#1, CONTROL STRUCTURE, TYPE II-54"Ø (SEE DETAIL ON SHEET 3 OF 4)
W/SOLID LOCKING LID
RIM=280.30
OVERFLOW=278.68, 8"(TOP OF TEE)
IE=276.50, 6"(E)-DOWNSPOUT LINE
IE=273.40, 36"(N), 8"(W)
ELEV.=271.40, 8"(BOTTOM OF TEE)
INSIDE BOTTOM=269.40
 - (D) 20" SLOT DRAIN GRATE ELEV.=VARIES (MIN.=278.75) IE=277.10, 4"(E)
 - (E) 4" WATER TIGHT CONNECTION IE=275.64, 4"

STORM PIPE PVC SHALL BE SDR-35 PVC AT SLOPE=2.00% MINIMUM (TYPICAL) UNLESS OTHERWISE NOTED

IMPERVIOUS SURFACES:
 ROOF AREA (UNDER EAVES) = 4,988 SQ. FEET
 UNCOVERED DRIVEWAY AREA = 722 SQ. FEET
 UNCOVERED PAVEMENT WALKWAY = 84 SQ. FEET
 UNCOVERED CONCRETE PADS = 20 SQ. FEET
 TOTAL IMPERVIOUS AREAS = 5,814 SQ. FEET

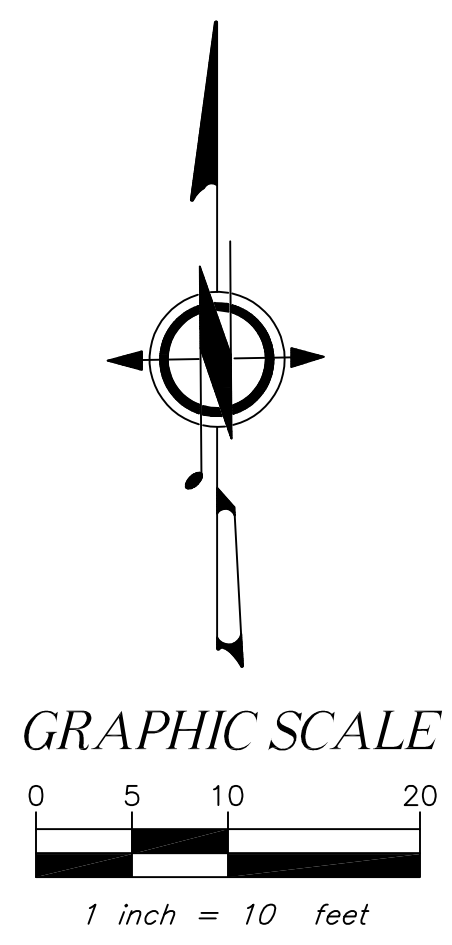

PROJECT: 4104 83rd Avenue SE
 CLIENT: JayMarc Diamond, LLC
 SHEET CONTENT: Utility & Tree Plan
 DATE: 12/20/2023
 JOB NO.:
 DWG NO.: 2 OF 4
 PERMIT #: 23XX-XXX
 DESIGNED BY: DLO
 DRAWN BY: SLS
 CHECKED BY: DLO
 OFFICE: OFFICE ENGINEERS
 13902 SOUTHEAST 190TH PLACE
 RENTON, WASHINGTON 98058
 PHONE: 425-260-3412
 CONTACT: DARRELL OFFER, P.E.
 REVISIONS: 1 12/20/2023 REV. NO. DATE DESCRIPTION

Section I-2.5.2 Minimum Requirement #2 - Construction Storm Water Pollution Prevention Plan (CSWPP)

A Construction Stormwater Pollution Prevention Plan (CSWPP) has been prepared and included within this Report. The CSWPP plan shall include construction installation of erosion control, establish a construction access, preservation of existing vegetation during construction, and protection of existing drainage inlets. This will include but not limited to: the use of the existing asphalt driveway (on the north side) to provide construction access from 83rd Avenue SE; installing filter fabric silt fencing along the down gradient property lines (west and south); installation of filter socks within the public catch basins located within 83rd Avenue SE; retention of native vegetated areas including tree/vegetation retention within the rear (east) and front (west) yards; and the use straw or chipped materials placed over exposed disturbed soils to prevent runoff from carrying solids.

Section I-2.5.3 Minimum Requirement #3 - Source Control of Pollution

Source control BMP's will be utilized to contain pollution generating runoff. No concrete washout will be allowed on the property during construction. No fuel materials will be placed or stored on site during construction.

Section I-2.5.4 Minimum Requirement #4 - Preservation of Natural Drainage Systems and Outfalls

The subject property slopes from a high point at the northeast corner (at elevation 287.53) towards the southwest corner (at elevation 277.00). The existing house roof area discharges onto the ground with splash blocks and then sheet flows over the landscape area and into 83rd Avenue SE. The existing driveway sheet flows towards the shoulder of 83rd Avenue SE. Both these areas combine within catch basin (CB#22-111 – Photo #4) within 83rd Avenue SE at the southwest corner. The natural discharge and outfall from the subject property is sheet flow and collection by a public storm basin in the southwest corner of the property. The proposed discharge will be to convey the onsite drainage from the driveway and roof area within a storm pipe and connect to CB#22-111. The natural outfall has been preserved by the new development.

The subject property was visited in September and November 2023 to review and evaluate on-site drainage patterns and walk and review the downstream system. The downstream system consists of catch basins and conveyance pipes before discharging into a ravine on the south side of West Mercer Way. The downstream, where accessible, has no indications of flooding, overtopping, scouring.

4104 83rd Avenue SE Downstream

Photo #1 – View from 83rd Avenue SE towards subject property



Photo #2 – View from northwest corner of subject property towards existing house



Photo #3 – View from 83rd Avenue SE towards northwest corner – existing driveway



Photo #4 – View south on 83rd at Cb#22-111



Photo #5 – Viewing north on 83rd at CB#22-112



Photo #6 – Viewing south on 83rd at CB#22-55



Photo #7 – Viewing west down shared access between 4131 & 4111 83rd Avenue SE – CB#22-130



Photo #8 – West end of shared access – CB#22-168 (with solid round lid)



Photo #9 – View from school access towards West Mercer Way – CB#22-16



Photo #10 – CB#22-21



Photo #11 – View from Cb#22-21 towards south – drainage channel



Section I-2.5.5 Minimum Requirement #5 - On-Site Stormwater Management

The proposed project drainage shall be evaluated using "List #2, On-Site Stormwater Management BMPs for projects triggering Minimum Requirements #1 - #9" – DOE Volume 1, chapter 2, pages 57 - 58. A Geotechnical Evaluation was prepared by Cobalt Geosciences and is attached to this Report in Appendix A.

List #2

*Lawn and landscape areas – **feasible*** - The use of Post-Construction Soil Quality and Depth shall be implemented within areas of the property that are not covered by hard surfaces and were disturbed during condition.

Roofs:

1.a. *Full Dispersion BMP T5.30 – **infeasible*** due to lack of available 100' of vegetated flow path downgradient from the roof area.

1.b. *Full Infiltration BMP T5.10A – **infeasible*** due to lack of permeable soils.

2. *Rain Garden/Bioretenion BMP T7.30 – **infeasible*** due to lack of available area on the downgradient portion of the property (west side) and preserved tree area on the west side. Can not remove trees in this area nor work under.

3. *Downspout Dispersion System BMP T5.10B – **infeasible*** due to lack of available 50' flow path downgradient of the downspout leaders.

4. *Perforated Pipe Connection BMP T5.10C - **infeasible*** due to lack of permeable soils.

Other Hard Surfaces:

1. *Full Dispersion BMP T5.30 – **infeasible*** due to the lack of available 100' of vegetated flow path length.

2. *Permeable Pavement BMP T5.15 – **infeasible*** infiltration type BMP not recommended by City of Mercer Island Infiltration Infeasibility Map.

3. *Rain Garden/Bioretenion BMP T7.30 – **infeasible*** due to lack of available area on the downgradient portion of the property (west side) and preserved tree area on the west side. Can not remove trees in this area nor work under.

4.a. *Sheet Flow Dispersion BMP T5.12 – **infeasible*** due to lack of available 25 feet of flow path downgradient from driveway.

4.b. *Concentrated Flow Dispersion BMP T5.11 - **infeasible*** due to lack of available flow path downgradient from hard surfaces.

There are no available BMPs to provide treatment of the roof area or other hard surfaces. Therefore, a connection to the public storm system within 83rd Avenue Se will be provided.

Section I-2.5.6 Minimum Requirement #6 – Runoff Treatment

Determine if thresholds for runoff treatment have been exceeded:

- (a) *Projects that exceed 5,000 square feet of pollution generating hard surfaces (PGHS)*
 - The proposed project will generate 722 square feet of PGHS – threshold not exceeded
- (b) *Projects that create or modify $\frac{3}{4}$ acre (32,670 square feet) of pollution generating pervious surface (PGPS)* – The proposed project will create or modify 4,350 square feet (1/10 acre) of PGPS – threshold not exceeded.

The thresholds for runoff treatment have not been exceeded, therefore proposed project does not have to provided runoff treatment.

Section I-2.5.7 Minimum Requirement #7 – Flow Control

Determine if thresholds for flow control have been exceeded:

Thresholds:

- (a) *Project effective impervious surfaces exceed 10,000 square feet* – Proposed project will create 5,814 square feet of effective impervious surfaces – threshold not exceeded.
- (b) *Project converts ¾ acre of vegetation to lawn or landscape area* – Proposed project will convert 1/10 acre to landscape area – threshold not exceeded.
- (c) *Project will cause a 0.10 cfs increase in the 100-year event between the existing condition and the proposed condition* – Project modeling will be required to determine if there is an increase in the 100-year event that exceeds threshold.

Modeling: Using WWHM model

Existing condition input:

- Roof area (flat) – 0.0851 acres
- Driveway (moderate) – 0.0359 acres
- Walkways/patio (flat) – 0.0156 acres
- Lawn (moderate) – 0.1866 acres

Mitigated condition (proposed) input:

- Roof area (moderate) – 0.1145 acres
- Driveway (moderate) – 0.0166 acres
- Walkways/pads (flat) – 0.0024 acres
- Lawn (moderate) – 0.1897 acres

WWMH Modeling can be found within Appendix B.

Modeling results:

- 100-year existing = 0.1754 cfs
- 100-year mitigated = 0.1747 cfs

Project will reduce the 100-year event, therefore threshold not exceeded

No flow control thresholds will be exceeded; therefore, DOE flow control is not required. However, City of Mercer Island (MI) does require flow control. Calculations for MI flow control is attached.

Detention Tank sizing per Mercer Island Requirements

Sizing of required for on-site detention system

- (A) The Geotechnical Evaluation by Cobalt Geosciences has determined the underlying soils type to be Class B
- (B) The proposed total impervious surface is 5,814 square feet

Using "*City of Mercer Island On-Site Detention Design Requirements, Table 1*", the required detention tank will be 54 linear feet of 60" (5') CMP pipe.

Detention Tank Sizing

Table 1

ON-SITE DETENTION DESIGN FOR PROJECTS BETWEEN 500 SF AND 9,500 SF NEW PLUS REPLACED IMPERVIOUS SURFACE AREA

New and Replaced Impervious Surface Area (sf)	Detention Pipe Diameter (in)	Detention Pipe Length (ft)		Lowest Orifice Diameter (in) ⁽³⁾		Distance from Outlet Invert to Second Orifice (ft)		Second Orifice Diameter (in)	
		B soils	C soils	B soils	C soils	B soils	C soils	B soils	C soils
500 to 1,000 sf	36"	30	22	0.5	0.5	2.2	2.0	0.5	0.8
	48"	18	11	0.5	0.5	3.3	3.2	0.9	0.8
	60"	11	7	0.5	0.5	4.2	3.4	0.5	0.6
1,001 to 2,000 sf	36"	66	43	0.5	0.5	2.2	2.3	0.9	1.4
	48"	34	23	0.5	0.5	3.2	3.3	0.9	1.2
	60"	22	14	0.5	0.5	4.3	3.6	0.9	0.9
2,001 to 3,000 sf	36"	90	66	0.5	0.5	2.2	2.4	0.9	1.9
	48"	48	36	0.5	0.5	3.1	2.8	0.9	1.5
	60"	30	20	0.5	0.5	4.2	3.7	0.9	1.1
3,001 to 4,000 sf	36"	120	78	0.5	0.5	2.4	2.2	1.4	1.6
	48"	62	42	0.5	0.5	2.8	2.9	0.8	1.3
	60"	42	26	0.5	0.5	3.8	3.9	0.9	1.3
4,001 to 5,000 sf	36"	134	91	0.5	0.5	2.8	2.2	1.7	1.5
	48"	73	49	0.5	0.5	3.6	2.9	1.6	1.5
	60"	46	31	0.5	0.5	4.6	3.5	1.6	1.3
5,001 to 6,000 sf	36"	162	109	0.5	0.5	2.7	2.2	1.8	1.6
	48"	90	90	0.5	0.5	3.5	2.9	1.7	1.5
	60"	54	37	0.5	0.5	4.6	3.6	1.6	1.4
6,001 to 7,000 sf	36"	192	128	0.5	0.5	2.7	2.2	1.9	1.8
	48"	102	68	0.5	0.5	3.7	2.9	1.9	1.6
	60"	64	43	0.5	0.5	4.6	3.6	1.8	1.5
7,001 to 8,000 sf	36"	216	146	0.5	0.5	2.8	2.2	2.0	1.9
	48"	119	79	0.5	0.5	3.8	2.9	2.2	1.7
	60"	73	49	0.5	0.5	4.5	3.6	2.0	1.6
8,001 to 8,500 sf ⁽¹⁾	36"	228	155	0.5	0.5	2.8	2.2	2.1	1.9
	48"	124	84	0.5	0.5	3.7	2.9	1.9	1.8
	60"	77	53	0.5	0.5	4.6	3.6	2.0	1.6
8,501 to 9,000 sf	36"	NA ⁽¹⁾	164	0.5	0.5	NA ⁽¹⁾	2.2	NA ⁽¹⁾	1.9
	48"	NA ⁽¹⁾	89	0.5	0.5	NA ⁽¹⁾	2.9	NA ⁽¹⁾	1.9
	60"	NA ⁽¹⁾	55	0.5	0.5	NA ⁽¹⁾	3.6	NA ⁽¹⁾	1.7
9,001 to 9,500 sf ⁽²⁾	36"	NA ⁽¹⁾	174	0.5	0.5	NA ⁽¹⁾	2.2	NA ⁽¹⁾	2.1
	48"	NA ⁽¹⁾	94	0.5	0.5	NA ⁽¹⁾	2.9	NA ⁽¹⁾	2.0
	60"	NA ⁽¹⁾	58	0.5	0.5	NA ⁽¹⁾	3.7	NA ⁽¹⁾	1.7

Notes:

- Minimum Requirement #7 (Flow Control) is required when the 100-year flow frequency causes a 0.15 cubic feet per second increase (when modeled in WWHM with a 15-minute timestep). Breakpoints shown in this table are based on a flat slope (0-5%). The 100-year flow frequency will need to be evaluated on a site-specific basis for projects on moderate (5-15%) or steep (> 15%) slopes.

- Soil type to be determined by geotechnical analysis or soil map.
- Sizing includes a Volume Correction Factor of 120%.
- Upper bound contributing area used for sizing.

⁽¹⁾ On Type B soils, new plus replaced impervious surface areas exceeding 8,500 sf trigger Minimum Requirement #7 (Flow Control)

⁽²⁾ On Type C soils, new plus replaced impervious surface areas exceeding 9,500 sf trigger Minimum Requirement #7 (Flow Control)

⁽³⁾ Minimum orifice diameter = 0.5 inches

in = inch

ft = feet

sf = square feet

Basis of Sizing Assumptions:

Sized per MR#5 in the Stormwater Management Manual for Puget Sound Basin (1992 Ecology Manual)

SBUH, Type 1A, 24-hour hydrograph

2-year, 24-hour storm = 2 in; 10-year, 24-hour storm = 3 in; 100-year, 24-hour storm = 4 in


Predeveloped = second growth forest (CN = 72 for Type B soils, CN = 81 for Type C soils)

Developed = impervious (CN = 98)

0.5 foot of sediment storage in detention pipe


Overland slope = 5%

ATTACHMENT 1
CITY OF MERCER ISLAND
ON-SITE DETENTION SYSTEM WORKSHEET
(FOR NEW PLUS REPLACED IMPERVIOUS
AREA OF 9,500 SF OR LESS)

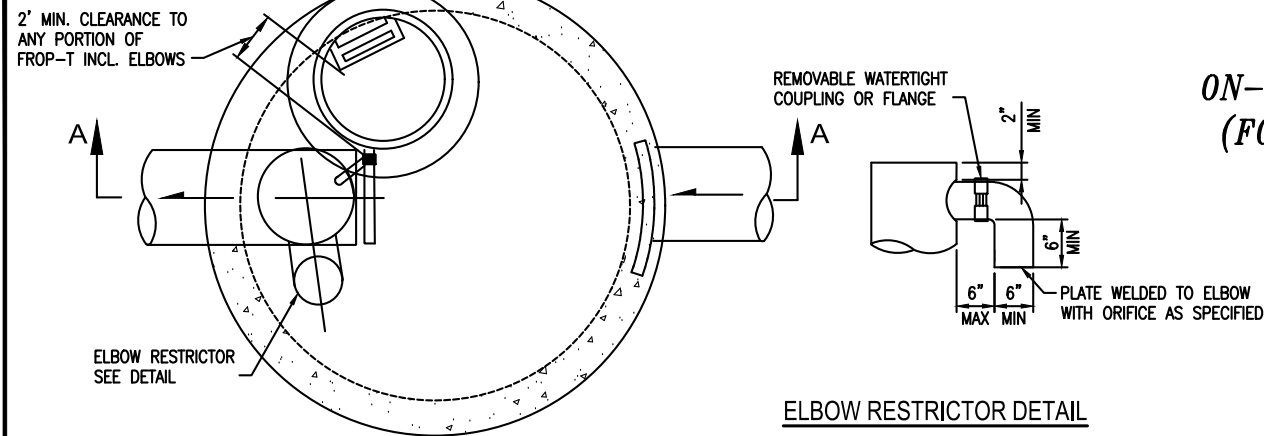


ELBOW RESTRICTOR DETAIL

OWNER: _____	ADDRESS: _____	PREPARED BY: _____
PERMIT #: _____	PHONE: _____	DATE: _____
NEW PLUS REPLACED IMPERVIOUS SURFACE AREA (SF): _____	DETENTION PIPE DIA (INCH): _____	DETENTION PIPE LENGTH (FT): _____
SOIL TYPE: _____	PIPE MATERIAL: _____	ORIFICE #1 DIA ____ INCH, ELEV _____
		ORIFICE #2 DIA ____ INCH, ELEV _____

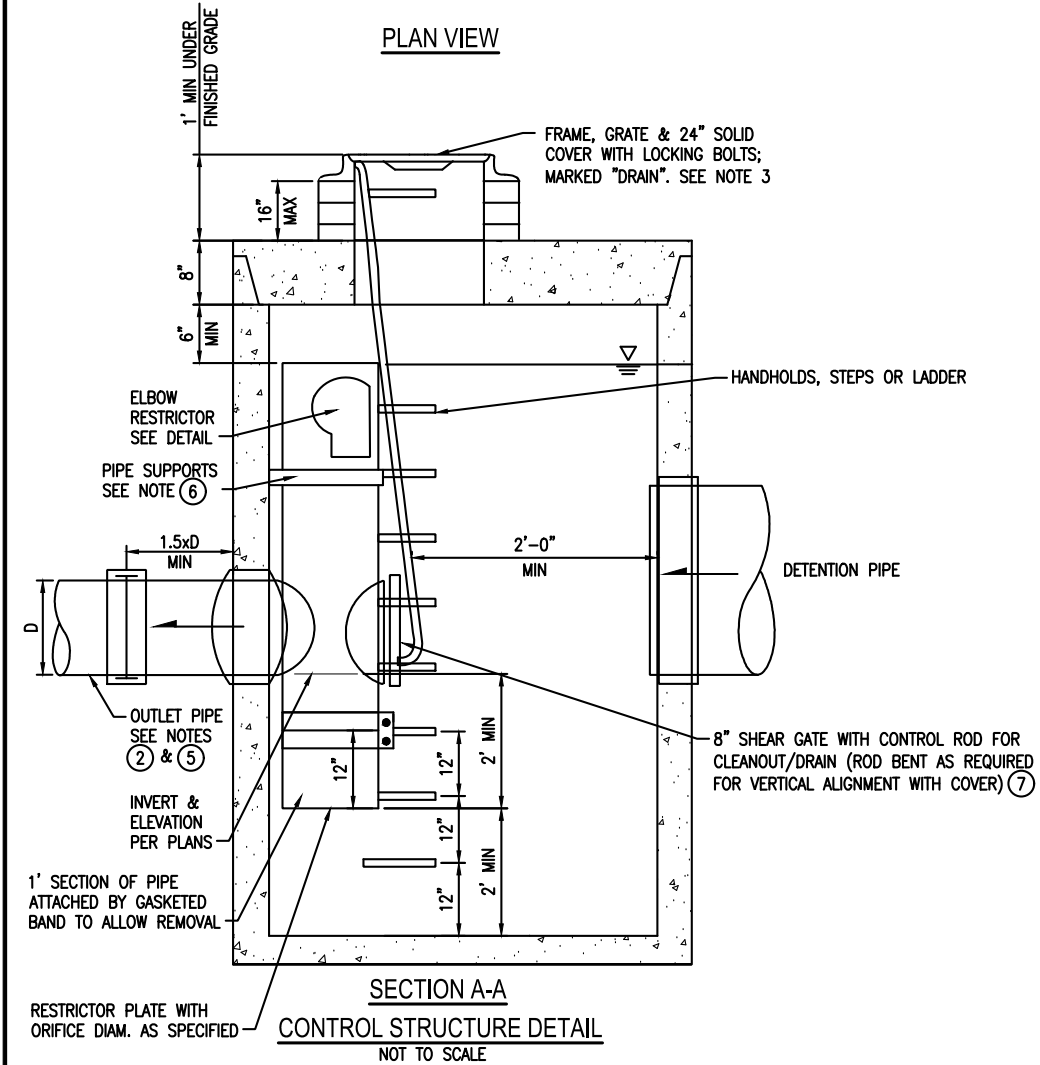

SECTION A-A
CONTROL STRUCTURE DETAIL
 NOT TO SCALE

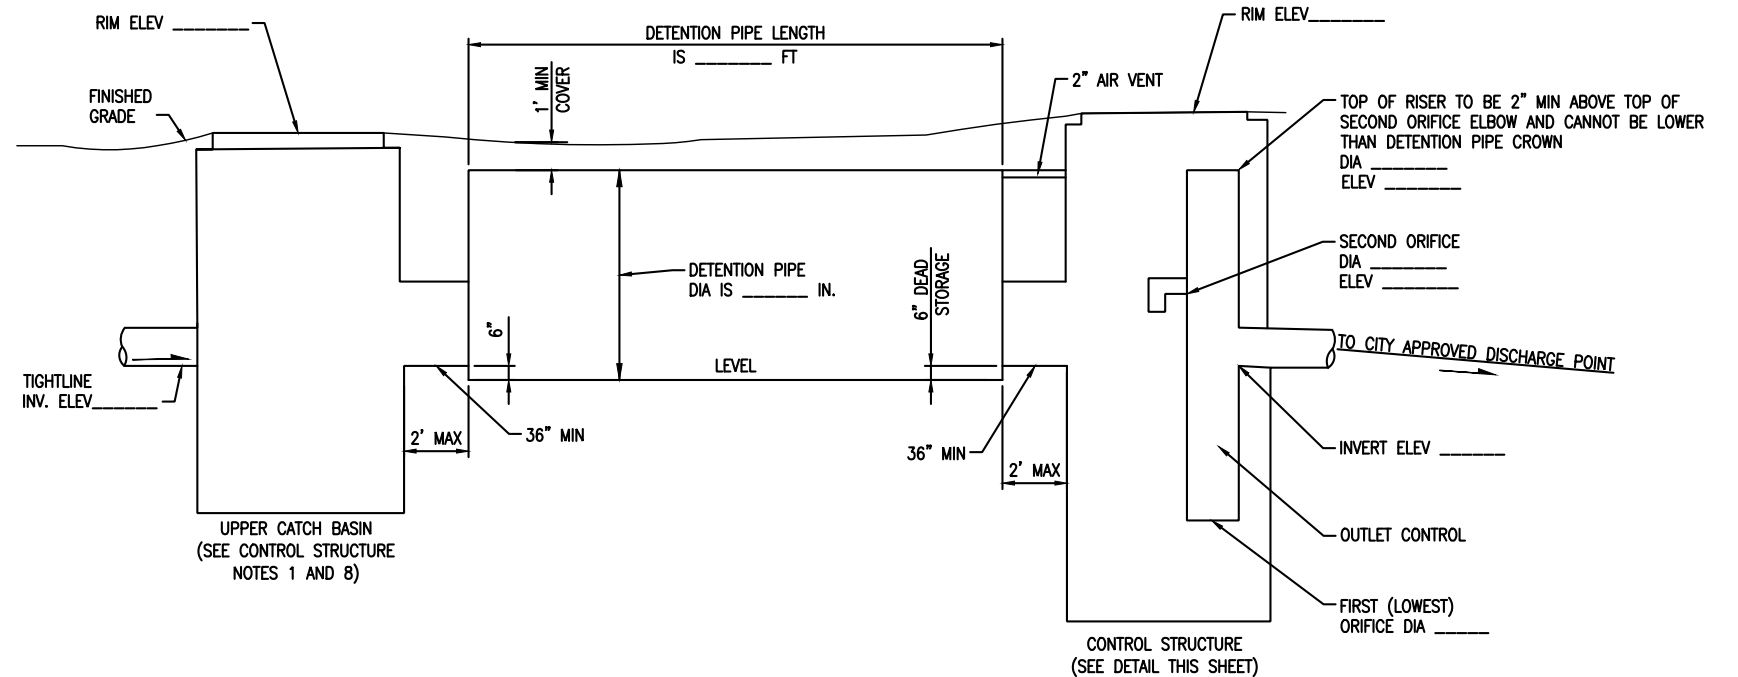

ON-SITE DETENTION SYSTEM
 NOT TO SCALE (ENGINEER TO FILL IN BLANKS)

CONTROL STRUCTURE NOTES:

- ① USE A MINIMUM OF A 54 IN. DIAM. TYPE 2 CATCH BASIN. THE ACTUAL SIZE IS DEPENDENT ON CONNECTING PIPE MATERIAL AND DIAMETER.
- ② OUTLET PIPE: MIN. 6 INCH.
- ③ METAL PARTS: CORROSION RESISTANT. NON-GALVANIZED PARTS PREFERRED. GALVANIZED PIPE PARTS TO HAVE ASPHALT TREATMENT 1.
- ④ FRAME AND LADDER OR STEPS OFFSET SO:
 - A. CLEANOUT GATE IS VISIBLE FROM TOP;
 - B. CLIMB-DOWN SPACE IS CLEAR OF RISER AND CLEANOUT GATE;
 - C. FRAME IS CLEAR OF CURB.
- ⑤ IF METAL OUTLET PIPE CONNECTS TO CEMENT CONCRETE PIPE, OUTLET PIPE TO HAVE SMOOTH O.D. EQUAL TO CONCRETE PIPE I.D. LESS 1/4 IN.

- ⑥ PROVIDE AT LEAST ONE 3 X 0.090 GAUGE SUPPORT BRACKET ANCHORED TO CONCRETE WALL WITH 5/8 IN. STAINLESS STEEL EXPANSION BOLTS OR EMBEDDED SUPPORTS 2 IN. INTO CATCH BASIN WALL (MAXIMUM 3'-0" VERTICAL SPACING).
- ⑦ THE SHEAR GATE SHALL BE MADE OF ALUMINUM ALLOY IN ACCORDANCE WITH ASTM B 26M AND ASTM B 275, DESIGNATION ZG32A; OR CAST IRON IN ACCORDANCE WITH ASTM A 48, CLASS 30B. THE LIFT HANDLE SHALL BE MADE OF A SIMILAR METAL TO THE GATE (TO PREVENT GALVANIC CORROSION), IT MAY BE OF SOLID ROD OR HOLLOW TUBING, WITH ADJUSTABLE HOOK AS REQUIRED. A NEOPRENE RUBBER GASKET IS REQUIRED BETWEEN THE RISER MOUNTING FLANGE AND THE GATE FLANGE. INSTALL THE GATE SO THAT THE LEVEL-LINE MARK IS LEVEL WHEN THE GATE IS CLOSED. THE MATING SURFACES OF THE LID AND THE BODY SHALL BE MACHINED FOR PROPER FIT. ALL SHEAR GATE BOLTS SHALL BE STAINLESS STEEL.
- ⑧ THE UPPER CATCH BASIN IS REQUIRED IF THE LENGTH OF THE DETENTION PIPE IS GREATER THAN 50 FT.

ON-SITE DETENTION SYSTEM NOTES:

1. CALL DEVELOPMENT SERVICES (206-275-7605) 24 HOURS IN ADVANCE FOR A DETENTION SYSTEM INSPECTION BEFORE BACKFILLING AND FOR FINAL INSPECTIONS.
2. RESPONSIBILITY FOR OPERATION AND MAINTANANCE OF DRAINAGE SYSTEMS ON PRIVATE PROPERTY IS RESPONSIBILITY OF THE PROPERTY OWNER. MATERIAL ACCUMULATED IN THE STORAGE PIPE MUST BE REMOVED FROM CATCH BASINS TO ALLOW PROPER OPERATION. THE OUTLET CONTROL ORIFICE MUST BE KEPT OPEN AT ALL TIMES.
3. PIPE MATERIAL, JOINT, AND PROTECTIVE TREATMENT SHALL BE IN ACCORDANCE WITH SECTION 7.04 AND 9.05 OF THE WSDOT STANDARD SPECIFICATION FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION, LATEST VERSION. SUCH MATERIALS INCLUDE THE FOLLOWING, LINED CORRUGATED POLYETHYLENE PIPE (LCPE), ALUMINIZED TYPE 2 CORRUGATED STEEL PIPE AND PIPE ARCH (MEETS AASHTO DESIGNATIONS M274 AND M36), CORRUGATED OR SPIRAL RIB ALUMINUM PIPE, OR REINFORCED CONCRETE PIPE. CORRUGATED STEEL PIPE IS NOT ALLOWED.
4. FOOTING DRAINS SHALL NOT BE CONNECTED TO THE DETENTION SYSTEM.

Section I-2.5.8 Minimum Requirement #8 – Wetlands Protection

Proposed project does not discharge into a wetland; therefore, Minimum Requirement #8 does not apply.

Section I-2.5.9 Minimum Requirement #9 – Operation and Maintenance
Attached

**Table V-4.5.2(3) Maintenance Standards - Closed Detention Systems
(Tanks/Vaults)**

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is Performed
Storage Area	Plugged Air Vents	One-half of the cross section of a vent is blocked at any point or the vent is damaged.	Vents open and functioning.
	Debris and Sediment	Accumulated sediment depth exceeds 10% of the diameter of the storage area for 1/2 length of storage vault or any point depth exceeds 15% of diameter. (Example: 72-inch storage tank would require cleaning when sediment reaches depth of 7 inches for more than 1/2 length of tank.)	All sediment and debris removed from storage area.
	Joints Between Tank/Pipe Section	Any openings or voids allowing material to be transported into facility. (Will require engineering analysis to determine structural stability).	All joint between tank/pipe sections are sealed.
	Tank Pipe Bent Out of Shape	Any part of tank/pipe is bent out of shape more than 10% of its design shape. (Review required by engineer to determine structural stability).	Tank/pipe repaired or replaced to design.
	Vault Structure Includes Cracks in Wall, Bottom, Damage to Frame and/or Top Slab	Cracks wider than 1/2-inch and any evidence of soil particles entering the structure through the cracks, or maintenance/inspection personnel determines that the vault is not structurally sound. Cracks wider than 1/2-inch at the joint of any inlet/outlet pipe or any evidence of soil particles entering the vault through the walls.	Vault replaced or repaired to design specifications and is structurally sound. No cracks more than 1/4-inch wide at the joint of the inlet/outlet pipe.
Manhole	Cover Not in Place	Cover is missing or only partially in place. Any open manhole requires maintenance.	Manhole is closed.

**Table V-4.5.2(3) Maintenance Standards - Closed Detention Systems
(Tanks/Vaults) (continued)**

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is Performed
	Locking Mechanism Not Working	Mechanism cannot be opened by one maintenance person with proper tools. Bolts into frame have less than 1/2 inch of thread (may not apply to self-locking lids).	Mechanism opens with proper tools.
	Cover Difficult to Remove	One maintenance person cannot remove lid after applying normal lifting pressure. Intent is to keep cover from sealing off access to maintenance.	Cover can be removed and reinstalled by one maintenance person.
	Ladder Rungs Unsafe	Ladder is unsafe due to missing rungs, misalignment, not securely attached to structure wall, rust, or cracks.	Ladder meets design standards. Allows maintenance person safe access.
Catch Basins	See "Catch Basins" (No. 5)	See "Catch Basins" (No. 5).	See "Catch Basins" (No. 5).

Table V-4.5.2(4) Maintenance Standards - Control Structure/Flow Restrictor

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
General	Trash and Debris (Includes Sediment)	Material exceeds 25% of sump depth or 1 foot below orifice plate.	Control structure orifice is not blocked. All trash and debris removed.
	Structural Damage	Structure is not securely attached to manhole wall. Structure is not in upright position (allow up to 10% from plumb). Connections to outlet pipe	Structure securely attached to wall and outlet pipe. Structure in correct position. Connections to outlet pipe are water tight; structure repaired or replaced and works as

Table V-4.5.2(4) Maintenance Standards - Control Structure/Flow Restrictor (continued)

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
		are not watertight and show signs of rust. Any holes - other than designed holes - in the structure.	designed. Structure has no holes other than designed holes.
Cleanout Gate	Damaged or Missing	Cleanout gate is not watertight or is missing. Gate cannot be moved up and down by one maintenance person. Chain/rod leading to gate is missing or damaged. Gate is rusted over 50% of its surface area.	Gate is watertight and works as designed. Gate moves up and down easily and is watertight. Chain is in place and works as designed. Gate is repaired or replaced to meet design standards.
Orifice Plate	Damaged or Missing	Control device is not working properly due to missing, out of place, or bent orifice plate.	Plate is in place and works as designed.
	Obstructions	Any trash, debris, sediment, or vegetation blocking the plate.	Plate is free of all obstructions and works as designed.
Overflow Pipe	Obstructions	Any trash or debris blocking (or having the potential of blocking) the overflow pipe.	Pipe is free of all obstructions and works as designed.
Manhole	See "Closed Detention Systems" (No. 3).	See "Closed Detention Systems" (No. 3).	See "Closed Detention Systems" (No. 3).
Catch Basin	See "Catch Basins" (No. 5).	See "Catch Basins" (No. 5).	See "Catch Basins" (No. 5).

Table V-4.5.2(5) Maintenance Standards - Catch Basins

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is performed
General	Trash & Debris	<p>Trash or debris which is located immediately in front of the catch basin opening or is blocking inletting capacity of the basin by more than 10%.</p> <p>Trash or debris (in the basin) that exceeds 60 percent of the sump depth as measured from the bottom of basin to invert of the lowest pipe into or out of the basin, but in no case less than a minimum of six inches clearance from the debris surface to the invert of the lowest pipe.</p> <p>Trash or debris in any inlet or outlet pipe blocking more than 1/3 of its height.</p> <p>Dead animals or vegetation that could generate odors that could cause complaints or dangerous gases (e.g., methane).</p>	<p>No Trash or debris located immediately in front of catch basin or on grate opening.</p> <p>No trash or debris in the catch basin.</p> <p>Inlet and outlet pipes free of trash or debris.</p> <p>No dead animals or vegetation present within the catch basin.</p>
	Sediment	Sediment (in the basin) that exceeds 60 percent of the sump depth as measured from the bottom of basin to invert of the lowest pipe into or out of the basin, but in no case less than a minimum of 6 inches clearance from the sediment surface to the invert of the lowest pipe.	No sediment in the catch basin
	Structure Damage to Frame and/or Top Slab	Top slab has holes larger than 2 square inches or cracks wider than 1/4 inch. (Intent is to make sure no material is running into basin).	Top slab is free of holes and cracks. Frame is sit-

Table V-4.5.2(5) Maintenance Standards - Catch Basins (continued)

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is performed
		Frame not sitting flush on top slab, i.e., separation of more than 3/4 inch of the frame from the top slab. Frame not securely attached	ting flush on the riser rings or top slab and firmly attached.
	Fractures or Cracks in Basin Walls/ Bottom	Maintenance person judges that structure is unsound. Grout fillet has separated or cracked wider than 1/2 inch and longer than 1 foot at the joint of any inlet/outlet pipe or any evidence of soil particles entering catch basin through cracks.	Basin replaced or repaired to design standards. Pipe is regouted and secure at basin wall.
	Settlement/ Misalignment	If failure of basin has created a safety, function, or design problem.	Basin replaced or repaired to design standards.
	Vegetation	Vegetation growing across and blocking more than 10% of the basin opening. Vegetation growing in inlet/outlet pipe joints that is more than six inches tall and less than six inches apart.	No vegetation blocking opening to basin. No vegetation or root growth present.
	Contamination and Pollution	See "Detention Ponds" (No. 1).	No pollution present.
Catch Basin Cover	Cover Not in Place	Cover is missing or only partially in place. Any open catch basin requires maintenance.	Catch basin cover is closed
	Locking Mechanism Not	Mechanism cannot be opened by one maintenance person with proper tools. Bolts into	Mechanism opens with

Table V-4.5.2(5) Maintenance Standards - Catch Basins (continued)

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is performed
	Working	frame have less than 1/2 inch of thread.	proper tools.
	Cover Difficult to Remove	One maintenance person cannot remove lid after applying normal lifting pressure. (Intent is keep cover from sealing off access to maintenance.)	Cover can be removed by one maintenance person.
Ladder	Ladder Rungs Unsafe	Ladder is unsafe due to missing rungs, not securely attached to basin wall, misalignment, rust, cracks, or sharp edges.	Ladder meets design standards and allows maintenance person safe access.
Metal Grates (If Applicable)	Grate opening Unsafe	Grate with opening wider than 7/8 inch.	Grate opening meets design standards.
	Trash and Debris	Trash and debris that is blocking more than 20% of grate surface inletting capacity.	Grate free of trash and debris.
	Damaged or Missing.	Grate missing or broken member(s) of the grate.	Grate is in place and meets design standards.

Table V-4.5.2(6) Maintenance Standards - Debris Barriers (e.g., Trash Racks)

Maintenance Components	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
General	Trash and Debris	Trash or debris that is plugging more than 20% of the openings in the barrier.	Barrier cleared to design flow capacity.
Metal	Damaged/ Missing	Bars are bent out of shape more than 3 inches.	Bars in place with no bends more than 3/4

Appendix A: Geotechnical Evaluation



Cobalt Geosciences, LLC
P.O. Box 1792
North Bend, WA 98045

November 13, 2023

JayMarc Homes
C/O Darrell Offe
Darrell.offe@comcast.net

RE: Geotechnical Evaluation
Proposed Residence
4104 83rd Avenue SE
Mercer Island, Washington

In accordance with your authorization, Cobalt Geosciences, LLC has prepared this letter to discuss the results of our geotechnical evaluation at the referenced site.

The purpose of our evaluation was to provide recommendations for foundation design, grading, and earthwork.

Site Description

The site is located at 4104 83rd Avenue SE in Mercer Island, Washington. The site consists of one nearly rectangular parcel (No. 3626500040) with a total area of 14,085 square feet.

The central portion of the property is developed with a residence and driveway. The site slopes downward from northeast and east to west and southwest at magnitudes of about 5 to 15 percent and relief of about 10 feet. There is a short cut slope about 4 feet tall and at magnitudes of over 50 percent near the west property line and right of way. There is an apparent wall near the north property line that is about 6 feet tall and 15 feet long (obscured by vegetation).

The site is vegetated with grasses, bushes, and variable diameter trees. The site is bordered to the north, south, and east by residences, and to the west by 83rd Avenue SE.

The proposed development includes a new residence and driveway in the central portion of the property.

Stormwater will include infiltration or other systems depending on feasibility. Site grading may include cuts and fills of 3 feet or less and foundation loads are expected to be light. We should be provided with the final plans to verify that our recommendations remain valid and do not require updating.

Area Geology

The Geologic map of the Mercer Island, indicates that the site is underlain by Vashon Glacial Till.

Vashon Glacial Till includes dense mixtures of silt, sand, gravel, and clay. These deposits are typically impermeable below a weathered zone.

Soil & Groundwater Conditions

As part of our evaluation, we excavated two hand borings where accessible. The explorations encountered approximately 6 inches of grass and topsoil underlain by approximately 3.25 to 4.25 feet of loose to medium dense, silty-fine to medium grained sand with gravel (Weathered Glacial

Till). These materials were underlain by dense, silty-fine to medium grained gravel (Glacial Till), which continued to the termination depths of the explorations.

Groundwater was not encountered during the exploration work. Perched groundwater may develop within 5 feet of the existing site elevations during the wet season based on the presence of soil mottling. Volumes would generally be light.

Water table elevations often fluctuate over time. The groundwater level will depend on a variety of factors that may include seasonal precipitation, irrigation, land use, climatic conditions and soil permeability. Water levels at the time of the field investigation may be different from those encountered during the construction phase of the project. It would be necessary to install a piezometer to determine groundwater depths over a typical year.

Seismic Parameters

The overall subsurface profile corresponds to a Site Class *D* as defined by Table 1613.5.2 of the International Building Code (IBC). A Site Class *D* applies to an overall profile consisting of medium dense to very dense soils within the upper 100 feet.

We referenced the U.S. Geological Survey (USGS) Earthquake Hazards Program Website to obtain values for S_s , S_t , F_a , and F_v . The USGS website includes the most updated published data on seismic conditions. The following tables provide seismic parameters from the USGS web site with referenced parameters from ASCE 7-16.

Seismic Design Parameters (ASCE 7-16)

Site Class	Spectral Acceleration at 0.2 sec. (g)	Spectral Acceleration at 1.0 sec. (g)	Site Coefficients		Design Spectral Response Parameters		Design PGA
			F_a	F_v	S_{DS}	S_{D1}	
D	1.418	0.493	1.0	Null	0.945	Null	0.607

Additional seismic considerations include liquefaction potential and amplification of ground motions by soft/loose soil deposits. The liquefaction potential is highest for loose sand with a high groundwater table. The site has a relatively low likelihood of liquefaction. For items listed as “Null” see Section 11.4.8 of the ASCE.

Conclusions and Recommendations

General

The site is underlain by soils consistent with Vashon Glacial Till. These soils become relatively dense below a weathered zone. The proposed residential structure may be supported on a shallow foundation system bearing on medium dense or firmer native soils or on structural fill placed on the native soils.

Local overexcavation or recompaction of loose weathered native soils may be necessary depending on the proposed elevations and locations of the new footings.

Widespread infiltration is not feasible due to the soil conditions and anticipated seasonal groundwater conditions. We recommend utilizing direct or perforated connection to an approved conveyance.

Site Preparation

Trees, shrubs and other vegetation should be removed prior to stripping of surficial organic-rich soil and fill. Based on observations from the site investigation program, it is anticipated that the stripping depth will be 6 to 18 inches. Deeper excavations will be necessary below larger trees and foundation systems.

The native soils consist of silty-sand with gravel. Most of the native soils may be used as structural fill provided they achieve compaction requirements and are within 3 percent of the optimum moisture. Some of these soils may only be suitable for use as fill during the summer months, as they will be above the optimum moisture levels in their current state. These soils are variably moisture sensitive and may degrade during periods of wet weather and under equipment traffic.

Imported structural fill should consist of a sand and gravel mixture with a maximum grain size of 3 inches and less than 5 percent fines (material passing the U.S. Standard No. 200 Sieve). Structural fill should be placed in maximum lift thicknesses of 12 inches and should be compacted to a minimum of 95 percent of the modified proctor maximum dry density, as determined by the ASTM D 1557 test method.

Temporary Excavations

Based on our understanding of the project, we anticipate that the grading could include local cuts on the order of approximately 3 feet or less for foundation and most of the utility placement. Temporary excavations should be sloped no steeper than 1.5H:1V (Horizontal:Vertical) in loose native soils and fill, 1H:1V in medium dense native soils and 3/4H:1V in dense to very dense native soils (if encountered). If an excavation is subject to heavy vibration or surcharge loads, we recommend that the excavations be sloped no steeper than 2H:1V, where room permits.

Temporary cuts should be in accordance with the Washington Administrative Code (WAC) Part N, Excavation, Trenching, and Shoring. Temporary slopes should be visually inspected daily by a qualified person during construction activities and the inspections should be documented in daily reports. The contractor is responsible for maintaining the stability of the temporary cut slopes and reducing slope erosion during construction.

Temporary cut slopes should be covered with visqueen to help reduce erosion during wet weather, and the slopes should be closely monitored until the permanent retaining systems or slope configurations are complete. Materials should not be stored or equipment operated within 10 feet of the top of any temporary cut slope.

Soil conditions may not be completely known from the geotechnical investigation. In the case of temporary cuts, the existing soil conditions may not be completely revealed until the excavation work exposes the soil. Typically, as excavation work progresses the maximum inclination of temporary slopes will need to be re-evaluated by the geotechnical engineer so that supplemental recommendations can be made. Soil and groundwater conditions can be highly variable. Scheduling for soil work will need to be adjustable, to deal with unanticipated conditions, so that the project can proceed and required deadlines can be met.

If any variations or undesirable conditions are encountered during construction, we should be notified so that supplemental recommendations can be made. If room constraints or groundwater conditions do not permit temporary slopes to be cut to the maximum angles allowed by the WAC, temporary shoring systems may be required. The contractor should be responsible for developing temporary shoring systems, if needed. We recommend that Cobalt Geosciences and the project structural engineer review temporary shoring designs prior to installation, to verify the suitability of the proposed systems.

Foundation Design

The proposed structure may be supported on a shallow spread footing foundation system bearing on undisturbed medium dense or firmer native soils or on properly compacted structural fill placed on the suitable native soils. Any undocumented fill and/or loose native soils should be removed and replaced with structural fill below foundation elements. Structural fill below footings should consist of clean angular rock 5/8 to 4 inches in size. We should verify soil conditions during foundation excavation work.

For shallow foundation support, we recommend widths of at least 16 and 24 inches, respectively, for continuous wall and isolated column footings supporting the proposed structure. Provided that the footings are supported as recommended above, a net allowable bearing pressure of 2,500 pounds per square foot (psf) may be used for design.

A 1/3 increase in the above value may be used for short duration loads, such as those imposed by wind and seismic events. Structural fill placed on bearing, native subgrade should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Footing excavations should be inspected to verify that the foundations will bear on suitable material.

Exterior footings should have a minimum depth of 18 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower. Interior footings should have a minimum depth of 12 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower.

If constructed as recommended, the total foundation settlement is not expected to exceed 1 inch. Differential settlement, along a 25-foot exterior wall footing, or between adjoining column footings, should be less than 1/2 inch. This translates to an angular distortion of 0.002. Most settlement is expected to occur during construction, as the loads are applied. However, additional post-construction settlement may occur if the foundation soils are flooded or saturated. All footing excavations should be observed by a qualified geotechnical consultant.

Resistance to lateral footing displacement can be determined using an allowable friction factor of 0.40 acting between the base of foundations and the supporting subgrades. Lateral resistance for footings can also be developed using an allowable equivalent fluid passive pressure of 250 pounds per cubic foot (pcf) acting against the appropriate vertical footing faces (neglect the upper 12 inches below grade in exterior areas). The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance.

Care should be taken to prevent wetting or drying of the bearing materials during construction. Any extremely wet or dry materials, or any loose or disturbed materials at the bottom of the footing excavations, should be removed prior to placing concrete. The potential for wetting or drying of the bearing materials can be reduced by pouring concrete as soon as possible after completing the footing excavation and evaluating the bearing surface by the geotechnical engineer or his representative.

Stormwater Management Feasibility

The site is underlain by weathered and unweathered glacial soil deposits. We evaluated the infiltration characteristics in HB-2 at a depth of 4 feet below grade.

We attempted to perform an in-situ infiltration test; however, during the saturation period, the inflow of testing water was reduced to the lowest possible rate and the water level in the exploration consistently increased. This indicates that vertical infiltration was reduced to near zero, confirming infiltration infeasibility due to the presence of an aquitard.

We recommend direct or perforated connection of runoff collection devices to City infrastructure. We can provide additional input if other systems are being considered or proposed.

Slab-on-Grade

We recommend that the upper 18 inches of the existing native soils within slab areas be re-compacted to at least 95 percent of the modified proctor (ASTM D1557 Test Method).

Often, a vapor barrier is considered below concrete slab areas. However, the usage of a vapor barrier could result in curling of the concrete slab at joints. Floor covers sensitive to moisture typically requires the usage of a vapor barrier. A materials or structural engineer should be consulted regarding the detailing of the vapor barrier below concrete slabs. Exterior slabs typically do not utilize vapor barriers.

The American Concrete Institutes ACI 360R-06 Design of Slabs on Grade and ACI 302.1R-04 Guide for Concrete Floor and Slab Construction are recommended references for vapor barrier selection and floor slab detailing.

Slabs on grade may be designed using a coefficient of subgrade reaction of 180 pounds per cubic inch (pci) assuming the slab-on-grade base course is underlain by structural fill placed and compacted as outlined above. A 4- to 6-inch-thick capillary break layer should be placed over the prepared subgrade. This material should consist of pea gravel or 5/8 inch clean angular rock.

A perimeter drainage system is recommended unless interior slab areas are elevated a minimum of 12 inches above adjacent exterior grades. If installed, a perimeter drainage system should consist of a 4-inch diameter perforated drain pipe surrounded by a minimum 6 inches of drain rock wrapped in a non-woven geosynthetic filter fabric to reduce migration of soil particles into the drainage system. The perimeter drainage system should discharge by gravity flow to a suitable stormwater system.

Exterior grades surrounding buildings should be sloped at a minimum of one percent to facilitate surface water flow away from the building and preferably with a relatively impermeable surface cover immediately adjacent to the building.

Erosion and Sediment Control

Erosion and sediment control (ESC) is used to reduce the transportation of eroded sediment to wetlands, streams, lakes, drainage systems, and adjacent properties. Erosion and sediment control measures should be implemented, and these measures should be in general accordance with local regulations. At a minimum, the following basic recommendations should be incorporated into the design of the erosion and sediment control features for the site:

- Schedule the soil, foundation, utility, and other work requiring excavation or the disturbance of the site soils, to take place during the dry season (generally May through September).

However, provided precautions are taken using Best Management Practices (BMP's), grading activities can be completed during the wet season (generally October through April).

- All site work should be completed and stabilized as quickly as possible.
- Additional perimeter erosion and sediment control features may be required to reduce the possibility of sediment entering the surface water. This may include additional silt fences, silt fences with a higher Apparent Opening Size (AOS), construction of a berm, or other filtration systems.
- Any runoff generated by dewatering discharge should be treated through construction of a sediment trap if there is sufficient space. If space is limited other filtration methods will need to be incorporated.

Utilities

Utility trenches should be excavated according to accepted engineering practices following OSHA (Occupational Safety and Health Administration) standards, by a contractor experienced in such work. The contractor is responsible for the safety of open trenches. Traffic and vibration adjacent to trench walls should be reduced; cyclic wetting and drying of excavation side slopes should be avoided. Depending upon the location and depth of some utility trenches, groundwater flow into open excavations could be experienced, especially during or shortly following periods of precipitation.

In general, silty and sandy soils were encountered at shallow depths in the explorations at this site. These soils have low cohesion and density and will have a tendency to cave or slough in excavations. Shoring or sloping back trench sidewalls is required within these soils in excavations greater than 4 feet deep.

All utility trench backfill should consist of imported structural fill or suitable on site soils. Utility trench backfill placed in or adjacent to buildings and exterior slabs should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. The upper 5 feet of utility trench backfill placed in pavement areas should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Below 5 feet, utility trench backfill in pavement areas should be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. Pipe bedding should be in accordance with the pipe manufacturer's recommendations.

The contractor is responsible for removing all water-sensitive soils from the trenches regardless of the backfill location and compaction requirements. Depending on the depth and location of the proposed utilities, we anticipate the need to re-compact existing fill soils below the utility structures and pipes. The contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction procedures.

CONSTRUCTION FIELD REVIEWS

Cobalt Geosciences should be retained to provide part time field review during construction in order to verify that the soil conditions encountered are consistent with our design assumptions and that the intent of our recommendations is being met. This will require field and engineering review to:

- Monitor and test structural fill placement and soil compaction
- Observe bearing capacity at foundation locations

- Observe slab-on-grade preparation
- Monitor foundation drainage placement
- Observe excavation stability

Geotechnical design services should also be anticipated during the subsequent final design phase to support the structural design and address specific issues arising during this phase. Field and engineering review services will also be required during the construction phase in order to provide a Final Letter for the project.

CLOSURE

This report was prepared for the exclusive use of JayMarc Homes and their appointed consultants. Any use of this report or the material contained herein by third parties, or for other than the intended purpose, should first be approved in writing by Cobalt Geosciences, LLC.

The recommendations contained in this report are based on assumed continuity of soils with those of our test holes and assumed structural loads. Cobalt Geosciences should be provided with final architectural and civil drawings when they become available in order that we may review our design recommendations and advise of any revisions, if necessary.

Use of this report is subject to the Statement of General Conditions provided in Appendix A. It is the responsibility of JayMarc Homes who is identified as “the Client” within the Statement of General Conditions, and its agents to review the conditions and to notify Cobalt Geosciences should any of these not be satisfied.

Sincerely,

Cobalt Geosciences, LLC



11/13/2023
Phil Haberman, PE, LG, LEG
Principal

Statement of General Conditions

USE OF THIS REPORT: This report has been prepared for the sole benefit of the Client or its agent and may not be used by any third party without the express written consent of Cobalt Geosciences and the Client. Any use which a third party makes of this report is the responsibility of such third party.

BASIS OF THE REPORT: The information, opinions, and/or recommendations made in this report are in accordance with Cobalt Geosciences present understanding of the site specific project as described by the Client. The applicability of these is restricted to the site conditions encountered at the time of the investigation or study. If the proposed site specific project differs or is modified from what is described in this report or if the site conditions are altered, this report is no longer valid unless Cobalt Geosciences is requested by the Client to review and revise the report to reflect the differing or modified project specifics and/or the altered site conditions.

STANDARD OF CARE: Preparation of this report, and all associated work, was carried out in accordance with the normally accepted standard of care in the state of execution for the specific professional service provided to the Client. No other warranty is made.

INTERPRETATION OF SITE CONDITIONS: Soil, rock, or other material descriptions, and statements regarding their condition, made in this report are based on site conditions encountered by Cobalt Geosciences at the time of the work and at the specific testing and/or sampling locations. Classifications and statements of condition have been made in accordance with normally accepted practices which are judgmental in nature; no specific description should be considered exact, but rather reflective of the anticipated material behavior. Extrapolation of in situ conditions can only be made to some limited extent beyond the sampling or test points. The extent depends on variability of the soil, rock and groundwater conditions as influenced by geological processes, construction activity, and site use.

VARYING OR UNEXPECTED CONDITIONS: Should any site or subsurface conditions be encountered that are different from those described in this report or encountered at the test locations, Cobalt Geosciences must be notified immediately to assess if the varying or unexpected conditions are substantial and if reassessments of the report conclusions or recommendations are required. Cobalt Geosciences will not be responsible to any party for damages incurred as a result of failing to notify Cobalt Geosciences that differing site or sub-surface conditions are present upon becoming aware of such conditions.

PLANNING, DESIGN, OR CONSTRUCTION: Development or design plans and specifications should be reviewed by Cobalt Geosciences, sufficiently ahead of initiating the next project stage (property acquisition, tender, construction, etc), to confirm that this report completely addresses the elaborated project specifics and that the contents of this report have been properly interpreted. Specialty quality assurance services (field observations and testing) during construction are a necessary part of the evaluation of sub-subsurface conditions and site preparation works. Site work relating to the recommendations included in this report should only be carried out in the presence of a qualified geotechnical engineer; Cobalt Geosciences cannot be responsible for site work carried out without being present.



 **Approximate Hand
HB-1 Boring Location**


King County imap Image



Proposed Residence
4014 83rd Ave SE
Mercer Island, Washington

Site Image
Figure 1

Cobalt Geosciences, LLC
P.O. Box 82243
Kenmore, WA 98028
(206) 331-1097
www.cobaltgeo.com
cobaltgeo@gmail.com

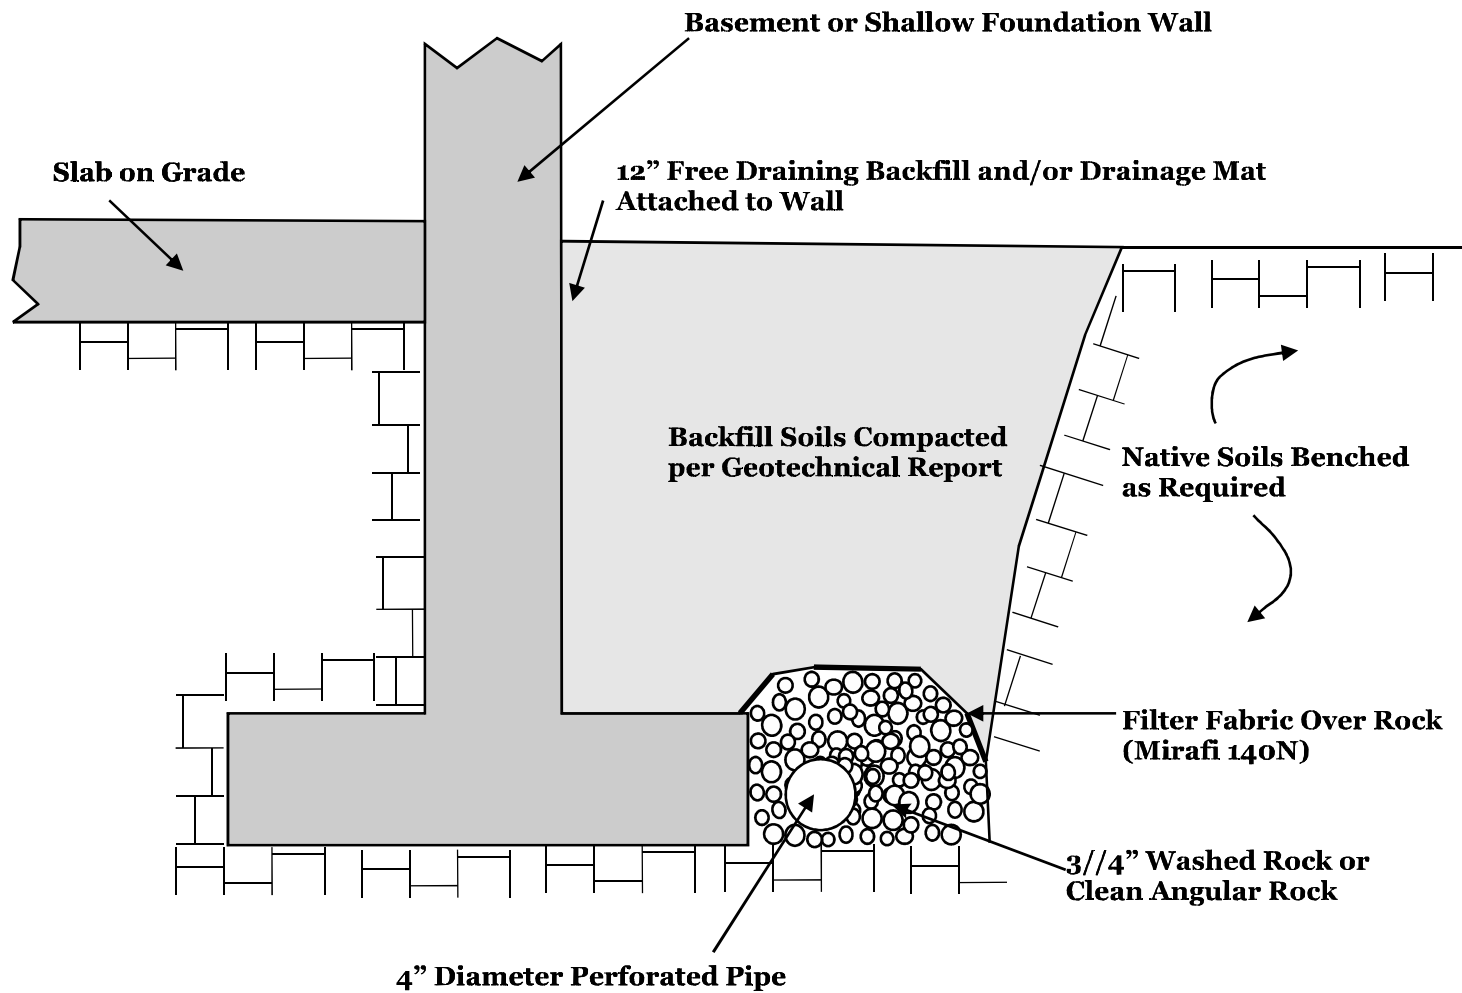

Not to Scale



Typical Foundation Drain Detail

Attachment

Cobalt Geosciences, LLC
 PO Box 1792
 North Bend, WA 98045
 (206) 331-1097
www.cobaltgeo.com
phil@cobaltgeo.com

Unified Soil Classification System (USCS)

MAJOR DIVISIONS			SYMBOL	TYPICAL DESCRIPTION	
COARSE GRAINED SOILS (more than 50% retained on No. 200 sieve)	Gravels (more than 50% of coarse fraction retained on No. 4 sieve)	Clean Gravels (less than 5% fines)	GW	Well-graded gravels, gravels, gravel-sand mixtures, little or no fines	
		Gravels with Fines (more than 12% fines)	GP	Poorly graded gravels, gravel-sand mixtures, little or no fines	
		Gravels with Fines (more than 12% fines)	GM	Silty gravels, gravel-sand-silt mixtures	
		Gravels with Fines (more than 12% fines)	GC	Clayey gravels, gravel-sand-clay mixtures	
	Sands (50% or more of coarse fraction passes the No. 4 sieve)	Clean Sands (less than 5% fines)	SW	Well-graded sands, gravelly sands, little or no fines	
		Sands with Fines (more than 12% fines)	SP	Poorly graded sand, gravelly sands, little or no fines	
		Sands with Fines (more than 12% fines)	SM	Silty sands, sand-silt mixtures	
		Sands with Fines (more than 12% fines)	SC	Clayey sands, sand-clay mixtures	
		Silts and Clays (liquid limit less than 50)	Inorganic	ML	Inorganic silts of low to medium plasticity, sandy silts, gravelly silts, or clayey silts with slight plasticity
			Inorganic	CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays
Organic	OL		Organic silts and organic silty clays of low plasticity		
Silts and Clays (liquid limit 50 or more)	Inorganic		MH	Inorganic silts, micaceous or diatomaceous fine sands or silty soils, elastic silt	
	Inorganic	CH	Inorganic clays of medium to high plasticity, sandy fat clay, or gravelly fat clay		
	Organic	OH	Organic clays of medium to high plasticity, organic silts		
HIGHLY ORGANIC SOILS	Primarily organic matter, dark in color, and organic odor	PT	Peat, humus, swamp soils with high organic content (ASTM D4427)		

Classification of Soil Constituents
<p>MAJOR constituents compose more than 50 percent, by weight, of the soil. Major constituents are capitalized (i.e., SAND).</p> <p>Minor constituents compose 12 to 50 percent of the soil and precede the major constituents (i.e., silty SAND). Minor constituents preceded by "slightly" compose 5 to 12 percent of the soil (i.e., slightly silty SAND).</p> <p>Trace constituents compose 0 to 5 percent of the soil (i.e., slightly silty SAND, trace gravel).</p>

Grain Size Definitions	
Description	Sieve Number and/or Size
Fines	< #200 (0.08 mm)
Sand	#200 to #40 (0.08 to 0.4 mm)
-Fine	#40 to #10 (0.4 to 2 mm)
-Medium	#10 to #4 (2 to 5 mm)
-Coarse	
Gravel	#4 to 3/4 inch (5 to 19 mm)
-Fine	3/4 to 3 inches (19 to 76 mm)
-Coarse	
Cobbles	3 to 12 inches (75 to 305 mm)
Boulders	>12 inches (305 mm)

Relative Density (Coarse Grained Soils)		Consistency (Fine Grained Soils)	
N, SPT, Blows/FT	Relative Density	N, SPT, Blows/FT	Relative Consistency
0 - 4	Very loose	Under 2	Very soft
4 - 10	Loose	2 - 4	Soft
10 - 30	Medium dense	4 - 8	Medium stiff
30 - 50	Dense	8 - 15	Stiff
Over 50	Very dense	15 - 30	Very stiff
		Over 30	Hard

Moisture Content Definitions	
Dry	Absence of moisture, dusty, dry to the touch
Moist	Damp but no visible water
Wet	Visible free water, from below water table



Cobalt Geosciences, LLC
 P.O. Box 82243
 Kenmore, WA 98028
 (206) 331-1097
www.cobaltgeo.com
cobaltgeo@gmail.com

Soil Classification Chart

Figure C1

Hand Boring HB-1

Date: November 2023

Depth: 6'

Groundwater: None

Contractor: Cobalt

Elevation:

Logged By: PH

Checked By: SC

Depth (Feet)	Interval	Graphic Log	USCS Symbol	Material Description	Groundwater	Moisture Content (%)					
						Plastic Limit	Liquid Limit				
						DCP Equivalent N-Value					
						0	10	20	30	40	50
		[Topsoil/Vegetation]		Topsoil/Vegetation							
1		[Yellow mottled pattern]	SM	Loose to medium dense, silty-fine to medium grained sand with gravel dark yellowish brown to grayish brown, moist. (Weathered Glacial Till)							
2											
3				Locally mottled							
4	■										
5		[Yellow mottled pattern]	SM	Dense, silty-fine to medium grained sand with gravel grayish brown, moist. (Glacial Till)							
6	■										
7				End of Hand Boring 6'							
8											
9											
10											



Proposed Residence
4104 83rd Avenue SE
Mercer Island, Washington

**Exploration
Logs**

Cobalt Geosciences, LLC
P.O. Box 82243
Kenmore, WA 98028
(206) 331-1097
www.cobaltgeo.com
cobaltgeo@gmail.com

Hand Boring HB-2

Date: November 2023

Depth: 6'

Groundwater: None

Contractor: Cobalt

Elevation:

Logged By: PH

Checked By: SC

Depth (Feet)	Interval	Graphic Log	USCS Symbol	Material Description	Groundwater	Moisture Content (%)						
						Plastic Limit	Liquid Limit					
						DCP Equivalent N-Value						
						0	10	20	30	40	50	
		[Topsoil/Vegetation]		Topsoil/Vegetation								
1		[Yellow mottled sand with gravel]	SM	Loose to medium dense, silty-fine to medium grained sand with gravel dark yellowish brown to grayish brown, moist. (Weathered Glacial Till)								
2				Locally mottled								
3	■											
4		[Yellow mottled sand with gravel]	SM	Dense, silty-fine to medium grained sand with gravel grayish brown, moist. (Glacial Till)								
5	■											
6												
7				End of Hand Boring 6'								
8												
9												
10												



Proposed Residence
4104 83rd Avenue SE
Mercer Island, Washington

**Exploration
Logs**

Cobalt Geosciences, LLC
P.O. Box 82243
Kenmore, WA 98028
(206) 331-1097
www.cobaltgeo.com
cobaltgeo@gmail.com

Appendix B: WWHM Modeling

WWHM2012
PROJECT REPORT

General Model Information

WWHM2012 Project Name: 4104 83rd Modeling

Site Name: JayMarc
Site Address: 4104 83rd Avenue SE
City: Mercer Island
Report Date: 12/7/2023
Gage: Seatac
Data Start: 1948/10/01
Data End: 2009/09/30
Timestep: 15 Minute
Precip Scale: 1.000
Version Date: 2023/01/27
Version: 4.2.19

POC Thresholds

Low Flow Threshold for POC1:	50 Percent of the 2 Year
High Flow Threshold for POC1:	50 Year

Landuse Basin Data

Predeveloped Land Use

Basin 1

Bypass:	No
GroundWater:	No
Pervious Land Use	acre
C, Lawn, Mod	0.1866
Pervious Total	0.1866
Impervious Land Use	acre
ROOF TOPS FLAT	0.0851
ROADS FLAT	0.0359
SIDEWALKS FLAT	0.0156
Impervious Total	0.1366
Basin Total	0.3232



Mitigated Land Use

Basin 1

Bypass:	No
GroundWater:	No
Pervious Land Use C, Lawn, Mod	acre 0.1897
Pervious Total	0.1897
Impervious Land Use	acre
ROOF TOPS FLAT	0.1145
ROADS FLAT	0.0166
SIDEWALKS FLAT	0.0024
Impervious Total	0.1335
Basin Total	0.3232

Analysis Results

POC 1

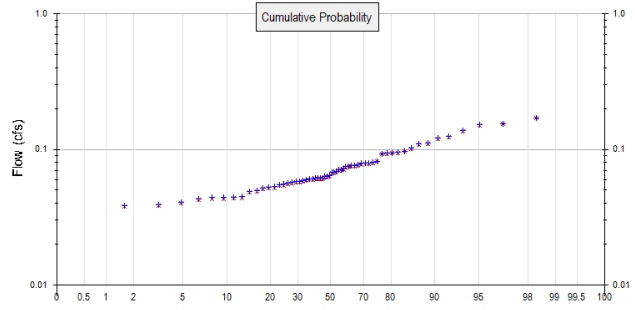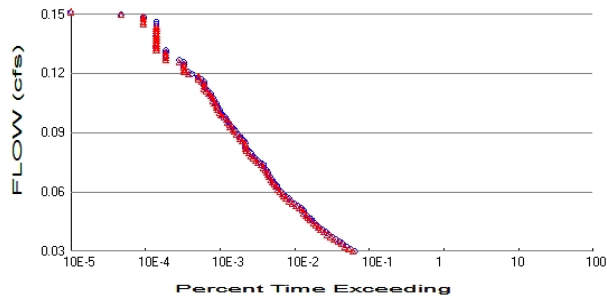

+ Predeveloped x Mitigated

Predeveloped Landuse Totals for POC #1

Total Pervious Area: 0.1866
 Total Impervious Area: 0.1366

Mitigated Landuse Totals for POC #1

Total Pervious Area: 0.1897
 Total Impervious Area: 0.1335

Flow Frequency Method: Log Pearson Type III 17B

Flow Frequency Return Periods for Predeveloped. POC #1

Return Period	Flow(cfs)
2 year	0.067285
5 year	0.092253
10 year	0.11032
25 year	0.134946
50 year	0.154632
100 year	0.175495

Flow Frequency Return Periods for Mitigated. POC #1

Return Period	Flow(cfs)
2 year	0.066383
5 year	0.091292
10 year	0.109358
25 year	0.13403
50 year	0.153782
100 year	0.174743

Annual Peaks

Annual Peaks for Predeveloped and Mitigated. POC #1

Year	Predeveloped	Mitigated
1949	0.102	0.101
1950	0.095	0.094
1951	0.061	0.061
1952	0.041	0.040
1953	0.043	0.042
1954	0.055	0.054
1955	0.059	0.058
1956	0.058	0.057
1957	0.075	0.074
1958	0.052	0.051

1959	0.044	0.043
1960	0.064	0.063
1961	0.060	0.060
1962	0.045	0.044
1963	0.060	0.060
1964	0.053	0.052
1965	0.079	0.078
1966	0.044	0.044
1967	0.094	0.093
1968	0.094	0.093
1969	0.071	0.070
1970	0.063	0.062
1971	0.076	0.075
1972	0.093	0.092
1973	0.039	0.038
1974	0.075	0.074
1975	0.077	0.076
1976	0.056	0.056
1977	0.052	0.052
1978	0.064	0.063
1979	0.079	0.077
1980	0.110	0.109
1981	0.068	0.067
1982	0.111	0.110
1983	0.071	0.069
1984	0.049	0.049
1985	0.068	0.067
1986	0.061	0.060
1987	0.080	0.078
1988	0.044	0.043
1989	0.055	0.054
1990	0.170	0.169
1991	0.125	0.124
1992	0.049	0.048
1993	0.039	0.038
1994	0.037	0.036
1995	0.059	0.058
1996	0.082	0.082
1997	0.071	0.071
1998	0.058	0.057
1999	0.151	0.150
2000	0.069	0.068
2001	0.061	0.060
2002	0.097	0.096
2003	0.079	0.079
2004	0.137	0.136
2005	0.061	0.061
2006	0.057	0.057
2007	0.154	0.154
2008	0.121	0.120
2009	0.076	0.075

Ranked Annual Peaks

Ranked Annual Peaks for Predeveloped and Mitigated. POC #1

Rank	Predeveloped	Mitigated
1	0.1701	0.1693
2	0.1543	0.1536
3	0.1511	0.1496

4	0.1374	0.1359
5	0.1246	0.1237
6	0.1210	0.1202
7	0.1110	0.1099
8	0.1097	0.1090
9	0.1020	0.1010
10	0.0973	0.0963
11	0.0949	0.0942
12	0.0941	0.0935
13	0.0938	0.0925
14	0.0929	0.0921
15	0.0819	0.0815
16	0.0798	0.0788
17	0.0795	0.0783
18	0.0787	0.0777
19	0.0786	0.0770
20	0.0772	0.0764
21	0.0761	0.0752
22	0.0760	0.0751
23	0.0752	0.0743
24	0.0745	0.0737
25	0.0715	0.0707
26	0.0710	0.0702
27	0.0707	0.0695
28	0.0688	0.0679
29	0.0679	0.0669
30	0.0676	0.0666
31	0.0638	0.0631
32	0.0635	0.0626
33	0.0631	0.0622
34	0.0613	0.0605
35	0.0612	0.0605
36	0.0612	0.0603
37	0.0610	0.0601
38	0.0603	0.0596
39	0.0603	0.0595
40	0.0594	0.0585
41	0.0589	0.0580
42	0.0580	0.0571
43	0.0579	0.0569
44	0.0573	0.0567
45	0.0563	0.0556
46	0.0551	0.0542
47	0.0549	0.0539
48	0.0528	0.0521
49	0.0525	0.0518
50	0.0515	0.0507
51	0.0494	0.0487
52	0.0491	0.0484
53	0.0447	0.0438
54	0.0444	0.0437
55	0.0443	0.0433
56	0.0441	0.0431
57	0.0432	0.0423
58	0.0406	0.0400
59	0.0388	0.0382
60	0.0386	0.0379
61	0.0368	0.0360