

CITY OF MERCER ISLAND

DEVELOPMENT SERVICES GROUP

9611 SE 36TH STREET | MERCER ISLAND, WA 98040

PHONE: 206.275.7605 | www.mercergov.org

Inspection Requests: Online: www.MyBuildingPermits.com VM: 206.275.7730



2015 WSEC & IRC Ventilation Worksheet (Effective July 1, 2016)

INFORMATION IN THESE WORKSHEETS MUST BE INCLUDED IN THE CONSTRUCTION DOCUMENTS

This set of worksheets has been developed to assist permit applicants with documenting compliance with the 2015 Washington State Energy Code. The following worksheets provide much of the required documentation for plan review. **The details, systems, and ratings noted here must also be shown on the drawings.**

PRESCRIPTIVE ENERGY CODE COMPLIANCE FOR CLIMATE ZONE MARINE 4

Component	Fenestration ¹		Ceiling w/ Attic	Vaulted Ceiling	Wood Framed Wall (Int.) ²	Mass Wall (Above grade)	Below-Grade Wall ^{2,3}	Framed Floor	Slab R-Value & Depth
	Vertical	Overhead							
Prescriptive Value	U. 0.30 max.	U. 0.50 max.	R-49 min.	R-38 min.	R-21 min.	R-21 min.	R- 10/15/21 Int. + TB	R-30 min.	R-10 min. 2'

¹ Fenestration is defined as skylights, roof windows, vertical windows (fixed or moveable), opaque doors, glazed doors, glazed block and combination opaque/glazed doors. Fenestration includes products with glass and non-glass glazing materials.

² Int. (intermediate framing) denotes standard framing 16" o.c. with headers insulated with a minimum R-10 insulation.

³ 10/15/21 +TB" means R-10 continuous insulation on the exterior of the wall, or R-15 on the continuous insulation on the interior of the wall, or R-21 cavity insulation plus a thermal break between the slab and the basement wall at the interior of the basement wall. "10/15/21 +TB" shall be permitted to be met with R-13 cavity insulation on the interior of the basement wall plus R-5 continuous insulation on the interior or exterior of the wall. "TB" means thermal break between floor slab and basement wall.

Whole House Ventilation (Prescriptive)

Please check the appropriate box to describe which of the four prescriptive Whole House Ventilation Systems you will be using AND fill in the required whole house ventilation rate in CFM's. (See "2015 Residential Whole House Ventilation Rate" Handout.) A complete system required by one of the sections noted below must be specified on the drawings.

WHOLE HOUSE VENTILATION METHOD 105CFM BASE RATE X FACTOR OF 2 FOR 50% RUN TIME	Whole House Ventilation Rate
<input type="checkbox"/> Intermittent Whole House Ventilation Using Exhaust Fans & Fresh Air Inlets. (IRC M1507.3.4)	
<input checked="" type="checkbox"/> Intermittent Whole House Ventilation Integrated with a Forced Air System. (IRC M1507.3.5)	105x2 = 210CFM
<input type="checkbox"/> Intermittent Whole House Ventilation using a Supply Fan. (IRC M1507.3.6)	
<input type="checkbox"/> Intermittent Whole House Ventilation Using a Heat Recovery Ventilation System (IRC M1507.3.7)	

Source Specific Exhaust Ventilation & Fan Efficiency

Required in each kitchen, bathroom, water closet compartment, laundry room, indoor swimming pool, spa and other rooms where water vapor or cooking odor is produced. (IRC M 1507.4) Fan efficiency from WAC 51-11R – Table R403.6.1. Kitchen Hoods greater than 400 cfm require makeup air per IRC M1503.4

Minimum Source Specific Ventilation Capacity Requirements

	Bathrooms – Utility Rooms		Kitchens	In-line fan
Intermittently operating	50 cfm min		100 cfm min	
Continuous operation	20 cfm min		25 cfm min	
Minimum Efficacy (cfm/watt)	1.4 cfm/watt if <90cfm	2.8 cfm/watt if >90cfm	2.8 cfm/watt	2.8 cfm/watt

Energy Efficiency Credits

Each dwelling unit shall comply with sufficient options from WSEC Table R406.2 so as to achieve the following minimum number of credits as described on the reverse side of this page.

<input type="checkbox"/>	Small Dwelling Unit: 1.5 credits (Dwelling units less than 1500 SF in conditioned floor area with less than 300 square feet of fenestration area. Additions to existing building that are greater than 500 SF of heated floor area, but less than 1500 SF. TOTAL SQUARE FEET OF FENESTRATION: _____ (doors, windows, skylights)
<input checked="" type="checkbox"/>	Medium Dwelling Unit: 3.5 credits (All dwelling units not included in #1 or #3. Exception: Dwelling units serving R-2 occupancies shall require 2.5 credits.)
<input type="checkbox"/>	Large Dwelling Unit: 4.5 credits (Dwelling Units exceeding 5000 SF of conditioned floor area.)
<input type="checkbox"/>	Additions less than 500 SF: 0.5 credits

2015 WSCE – Table R406.2 – circle the options that you will be using for this project

OPTION	DESCRIPTION	CREDIT(S)
1a <input type="checkbox"/>	EFFICIENT BUILDING ENVELOPE 1a: Vertical fenestration U = 0.28 Floor R-38 Slab on grade R-10 perimeter and under entire slab Below grade slab R-10 perimeter and under entire slab. OR Compliance based on Section R402.1.4: Reduce the Total UA by 5%.	0.5
1b <input type="checkbox"/>	EFFICIENT BUILDING ENVELOPE 1b: Vertical fenestration U = 0.25 Wall R-21 plus R-4 Floor R-38 Basement wall R-21 int plus R-5 ci Slab on grade R-10 perimeter and under entire slab Below grade slab R-10 perimeter and under entire slab. OR Compliance based on Section R402.1.4: Reduce the Total UA by 15%.	1.0
1c <input type="checkbox"/>	EFFICIENT BUILDING ENVELOPE 1c: Prescriptive compliance is based on Table R402.1.1 with the following modifications: Vertical fenestration U = 0.22 Ceiling and single-rafter or joist-vaulted R-49 advanced Wood frame wall R-21 int plus R-12 ci Floor R-38 Basement wall R-21 int plus R-12 ci Slab on grade R-10 perimeter and under entire slab Below grade slab R-10 perimeter and under entire slab OR Compliance based on Section R402.1.4: Reduce the Total UA by 30%.	2.0
1d <input type="checkbox"/>	EFFICIENT BUILDING ENVELOPE 1d: Prescriptive compliance is based on Table R402.1.1 with the following modifications: Vertical fenestration U = 0.24. Projects using this option may not use Option 1a, 1b or 1c.	0.5
2a <input type="checkbox"/>	AIR LEAKAGE CONTROL AND EFFICIENT VENTILATION 2a: Compliance based on R402.4.1.2: Reduce the tested air leakage to 3.0 air changes per hour maximum AND All whole house ventilation requirements as determined by Section M1507.3 of the <i>International Residential Code</i> shall be met with a high efficiency fan (maximum 0.35 watts/cfm), not interlocked with the furnace fan. Ventilation systems using a furnace including an ECM motor are allowed, provided that they are controlled to operate at low speed in ventilation only mode. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the maximum tested building air leakage and shall show the qualifying ventilation system.	0.5
2b <input checked="" type="checkbox"/>	AIR LEAKAGE CONTROL AND EFFICIENT VENTILATION 2b: Compliance based on Section R402.4.1.2: Reduce the tested air leakage to 2.0 air changes per hour maximum AND All whole house ventilation requirements as determined by Section M1507.3 of the <i>International Residential Code</i> shall be met with a heat recovery ventilation system with minimum sensible heat recovery efficiency of 0.70. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the maximum tested building air leakage and shall show the heat recovery ventilation system.	1.0
2c <input type="checkbox"/>	AIR LEAKAGE CONTROL AND EFFICIENT VENTILATION 2c: Compliance based on Section R402.4.1.2: Reduce the tested air leakage to 1.5 air changes per hour maximum. AND All whole house ventilation requirements as determined by Section M1507.3 of the <i>International Residential Code</i> shall be met with a heat recovery ventilation system with minimum sensible heat recovery efficiency of 0.85. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the maximum tested building air leakage and shall show the heat recovery ventilation system.	1.5
3a <input checked="" type="checkbox"/>	HIGH EFFICIENCY HVAC EQUIPMENT 3a: Gas, propane or oil-fired furnace with minimum AFUE of 94%, or Gas, propane or oiled-fired boiler with minimum AFUE of 92%. Projects may only include credit from one space heating option, 3a, 3b, 3c or 3d. When a housing unit has two pieces of equipment (i.e., two furnaces) both must meet the standard to receive the credit. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the heating equipment type and the minimum equipment efficiency.	1.0
3b <input type="checkbox"/>	HIGH EFFICIENCY HVAC EQUIPMENT 3b: Air-source heat pump with minimum HSPF of 9.0. Projects may only include credit from one space heating option, 3a, 3b, 3c or 3d. When a housing unit has two pieces of equipment (i.e., two furnaces) both must meet the standard to receive the credit. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the heating equipment type and the minimum equipment efficiency.	1.0
3c <input type="checkbox"/>	HIGH EFFICIENCY HVAC EQUIPMENT 3c: Closed-loop ground source heat pump; with a minimum COP of 3.3 OR Open loop water source heat pump with a maximum pumping hydraulic head of 150 feet and minimum COP of 3.6. Projects may only include credit from one space heating option, 3a, 3b, 3c or 3d. When a housing unit has two pieces of equipment (i.e., two furnaces) both must meet the standard to receive the credit. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the heating equipment type and the minimum equipment efficiency.	1.5
3d <input type="checkbox"/>	HIGH EFFICIENCY HVAC EQUIPMENT 3d: Ductless Split System Heat Pumps, Zonal Control: In homes where the primary space heating system is zonal electric heating, a ductless heat pump system shall be installed and provide heating to the largest zone of the housing unit. Projects may only include credit from one space heating option, 3a, 3b, 3c or 3d. When a housing unit has two pieces of equipment (i.e., two furnaces) both must meet the standard to receive the credit. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the heating equipment type and the minimum equipment efficiency.	1.0

2015 WSCE – Table R406.2 - Continued

OPTION	DESCRIPTION	CREDIT(S)
<p>4</p> <input type="checkbox"/>	<p>HIGH EFFICIENCY HVAC DISTRIBUTION SYSTEM: All heating and cooling system components installed inside the conditioned space. This includes all equipment and distribution system components such as forced air ducts, hydronic piping, hydronic floor heating loop, convectors and radiators. All combustion equipment shall be direct vent or sealed combustion. For forced air ducts: A maximum of 10 linear feet of return ducts and 5 linear feet of supply ducts may be located outside the conditioned space. All metallic ducts located outside the conditioned space must have both transverse and longitudinal joints sealed with mastic. If flex ducts are used, they cannot contain splices. Flex duct connections must be made with nylon straps and installed using a plastic strapping tensioning tool. Ducts located outside the conditioned space must be insulated to a minimum of R-8. Locating system components in conditioned crawl spaces is not permitted under this option. Electric resistance heat and ductless heat pumps are not permitted under this option. Direct combustion heating equipment with AFUE less than 80% is not permitted under this option. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the heating equipment type and shall show the location of the heating and cooling equipment and all the ductwork.</p>	<p>1.0</p>
<p>5a</p> <input type="checkbox"/>	<p>EFFICIENT WATER HEATING 5a: All showerhead and kitchen sink faucets installed in the house shall be rated at 1.75 GPM or less. All other lavatory faucets shall be rated at 1.0 GPM or less. Plumbing Fixtures Flow Ratings. Low flow plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following requirements: 1. Residential bathroom lavatory sink faucets: Maximum flow rate - 3.8 L/min (1.0 gal/min) when tested in accordance with ASME A112.18.1/CSA B125.1. 2. Residential kitchen faucets: Maximum flow rate - 6.6 L/min (1.75 gal/min) when tested in accordance with ASME A112.18.1/CSA B125.1. 3. Residential showerheads: Maximum flow rate - 6.6 L/min (1.75 gal/min) when tested in accordance with ASME A112.18.1/CSA B125.1. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the maximum flow rates for all showerheads, kitchen sink faucets, and other lavatory faucets.</p>	<p>0.5</p>
<p>5b</p> <input type="checkbox"/>	<p>EFFICIENT WATER HEATING 5b: Water heating system shall include one of the following: Gas, propane or oil water heater with a minimum EF of 0.74 OR Water heater heated by ground source heat pump meeting the requirements of Option 3c. OR For R-2 occupancy, a central heat pump water heater with an EF greater than 2.0 that would supply DHW to all the units through a ceiling minimum pipe insulation. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the water heater equipment type and the minimum equipment efficiency.</p>	<p>1.0</p>
<p>5c</p> <input checked="" type="checkbox"/>	<p>EFFICIENT WATER HEATING 5c: Water heating system shall include one of the following: Gas, propane or oil water heater with a minimum EF of 0.91 OR Solar water heating supplementing a minimum standard water heater. Solar water heating will provide a rated minimum savings of 85 therms or 2000 kWh based on the Solar Rating and Certification Corporation (SRCC) Annual Performance of OG-300 Certified Solar Water Heating Systems OR Electric heat pump water heater with a minimum EF of 2.0 and meeting the standards of NEEA's Northern Climate Specifications for Heat Pump Water Heaters To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall specify the water heater equipment type and the minimum equipment efficiency and, for solar water heating systems, the calculation of the minimum energy savings.</p>	<p>1.5</p>
<p>5d</p> <input type="checkbox"/>	<p>EFFICIENT WATER HEATING 5d: A drain water heat recovery unit(s) shall be installed, which captures waste water heat from all the showers, and has a minimum efficiency of 40% if installed for equal flow or a minimum efficiency of 52% if installed for unequal flow. Such units shall be rated in accordance CSA B55.1 and be so labeled. To qualify to claim this credit, the building permit drawings shall include a plumbing diagram that specified the drain water heat recovery units and the plumbing layout needed to install it and labels or other documentation shall be provided that demonstrates that the unit complies with the standard.</p>	<p>0.5</p>
<p>6</p> <input type="checkbox"/>	<p>RENEWABLE ELECTRIC ENERGY: For each 1200 kWh of electrical generation per each housing unit provided annually by on-site wind or solar equipment a 0.5 credit shall be allowed, up to 3 credits. Generation shall be calculated as follows: For solar electric systems, the design shall be demonstrated to meet this requirement using the National Renewable Energy Laboratory calculator PVWATTS. Documentation noting solar access shall be included on the plans. For wind generation projects designs shall document annual power generation based on the following factors: The wind turbine power curve; average annual wind speed at the site; frequency distribution of the wind speed at the site and height of the tower. To qualify to claim this credit, the building permit drawings shall specify the option being selected and shall show the photovoltaic or wind turbine equipment type, provide documentation of solar and wind access, and include a calculation of the minimum annual energy power production.</p>	<p>0.5</p>

Prescriptive Energy Code Compliance for All Climate Zones in Washington

Project Information

Contact Information

E MERCER PARCEL 1
8375 E MERCER
MERCER ISLAND, WA 98040

JEFFREY ALMETER
4303 STONE WAY N
SEATTLE, WA 98103

This project will use the requirements of the Prescriptive Path below and incorporate the minimum values listed. In addition, based on the size of the structure, the appropriate number of additional credits are checked as chosen by the permit applicant.

Authorized Representative Jeffrey P. Almeter

Date 28 AUG 2017

All Climate Zones		
	R-Value ^a	U-Factor ^a
Fenestration U-Factor ^b	n/a	0.30
Skylight U-Factor	n/a	0.50
Glazed Fenestration SHGC ^{b,e}	n/a	n/a
Ceiling ^k	49 ^j	0.026
Wood Frame Wall ^{g,m,n}	21 int	0.056
Mass Wall R-Value ⁱ	21/21 ^h	0.056
Floor	30 ^g	0.029
Below Grade Wall ^{c,m}	10/15/21 int + TB	0.042
Slab ^d R-Value & Depth	10, 2 ft	n/a

*Table R402.1.1 and Table R402.1.3 Footnotes included on Page 2.

Each dwelling unit in a residential building shall comply with sufficient options from Table R406.2 so as to achieve the following minimum number of credits:

- 1. Small Dwelling Unit: 1.5 credits**
 Dwelling units less than 1500 square feet in conditioned floor area with less than 300 square feet of fenestration area. Additions to existing building that are greater than 500 square feet of heated floor area but less than 1500 square feet.
- 2. Medium Dwelling Unit: 3.5 credits**
 All dwelling units that are not included in #1 or #3. **Exception:** Dwelling units serving R-2 occupancies shall require 2.5 credits.
- 3. Large Dwelling Unit: 4.5 credits**
 Dwelling units exceeding 5000 square feet of conditioned floor area.
- 4. Additions less than 500 square feet: .5 credits**

Table R406.2 Summary

Option	Description	Credit(s)		
1a	Efficient Building Envelope 1a	0.5		
1b	Efficient Building Envelope 1b	1.0		
1c	Efficient Building Envelope 1c	2.0		
1d	Efficient Building Envelope 1d	0.5		
2a	Air Leakage Control and Efficient Ventilation 2a	0.5		
2b	Air Leakage Control and Efficient Ventilation 2b	1.0	✓	1.0
2c	Air Leakage Control and Efficient Ventilation 2c	1.5		
3a	High Efficiency HVAC 3a	1.0	✓	1.0
3b	High Efficiency HVAC 3b	1.0		
3c	High Efficiency HVAC 3c	1.5		
3d	High Efficiency HVAC 3d	1.0		
4	High Efficiency HVAC Distribution System	1.0		
5a	Efficient Water Heating 5a	0.5		
5b	Efficient Water Heating 5b	1.0		
5c	Efficient Water Heating 5c	1.5		
5d	Efficient Water Heating 5d	0.5	✓	1.5
6	Renewable Electric Energy	0.5		
			*1200 kwh	0.0

Total Credits

3.50

*Please refer to Table R406.2 for complete option descriptions

Simple Heating System Size: Washington State

This heating system sizing calculator is based on the Prescriptive Requirements of the 2015 Washington State Energy Code (WSEC) and ACCA Manuals J and S. This calculator will calculate heating loads only. ACCA procedures for sizing cooling systems should be used to determine cooling loads.

Please fill out all of the green drop-downs and boxes that are applicable to your project. As you make selections in the drop-downs for each section, some values will be calculated for you. If you do not see the selection you need in the drop-down options, please call the WSU Energy Extension Program at (360) 956-2042 for assistance.

Project Information

E MERCER PARCEL 1
8383 E MERCER
MERCER ISLAND, WA 98040

Contact Information

JEFFREY ALMETER - RIPPLE DESIGN
4303 STONE WAY
SEATTLE, WA 98103

Heating System Type:

All Other Systems Heat Pump

To see detailed instructions for each section, place your cursor on the word "Instructions".

Design Temperature

Instructions

Mercer Island

Design Temperature Difference (ΔT) 45

$\Delta T = \text{Indoor (70 degrees)} - \text{Outdoor Design Temp}$

Area of Building

Conditioned Floor Area

Instructions

Conditioned Floor Area (sq ft)

4,791

Average Ceiling Height

Instructions

Average Ceiling Height (ft)

9.3

Conditioned Volume

44,556

Glazing and Doors

Instructions

U-0.30

U-Factor X Area = UA
0.300 X 1,575 = 472.59

Skylights

Instructions

U-Factor X Area = UA
0.50 X 0 = ---

Insulation

Attic

Instructions

R-49

U-Factor X Area = UA
0.026 X 2,129 = 55.35

Single Rafter or Joist Vaulted Ceilings

Instructions

No Vaulted Ceilings in this project.

U-Factor X Area = UA
--- X --- = ---

Above Grade Walls (see Figure 1)

Instructions

R-21 Intermediate

U-Factor X Area = UA
0.056 X 3,450 = 193.20

Floors

Instructions

R-38

U-Factor X Area = UA
0.025 X 1,126 = 28.15

Below Grade Walls (see Figure 1)

Instructions

R-21 Interior

U-Factor X Area = UA
0.042 X 946 = 39.73

Slab Below Grade (see Figure 1)

Instructions

R-5 Thermal Break at slab edge

F-Factor X Length = UA
0.570 X 146 = 83.22

Slab on Grade (see Figure 1)

Instructions

No Slab on Grade in this project.

F-Factor X Length = UA
--- X 0 = ---


Location of Ducts

Instructions

Unconditioned Space

Duct Leakage Coefficient

1.10

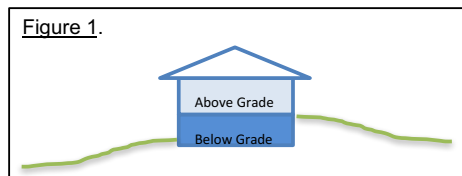

Sum of UA	872.25
Envelope Heat Load	39,251 Btu / Hour
<i>Sum of UA X ΔT</i>	
Air Leakage Heat Load	21,654 Btu / Hour
<i>Volume X 0.6 X ΔT X .018</i>	
Building Design Heat Load	60,905 Btu / Hour
<i>Air Leakage + Envelope Heat Loss</i>	
Building and Duct Heat Load	66,996 Btu / Hour
<i>Ducts in unconditioned space: Sum of Building Heat Loss X 1.10</i>	
<i>Ducts in conditioned space: Sum of Building Heat Loss X 1</i>	
Maximum Heat Equipment Output	93,794 Btu / Hour
<i>Building and Duct Heat Loss X 1.40 for Forced Air Furnace</i>	
<i>Building and Duct Heat Loss X 1.25 for Heat Pump</i>	